



Please note that Cypress is an Infineon Technologies Company.

The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content

The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers

Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

3ch DC/DC Converter IC for Automotive Cluster

S6BP501A/S6BP502A is a three channel output power management IC. This IC includes one high voltage buck DC/DC controller (DD3V), one buck DC/DC converter with built-in FETs (DD1V) and one boost DC/DC converter with built-in FETs (DD5V). Current mode architecture is used for fast load transient response. At no load, the input supply current is reduced to 15 μA (Typ). It is possible to provide stable output voltage under an automotive cold cranking condition until the input voltage falls to 2.5V. This IC is suitable for power supply solutions of automotive and Industrial applications. Each output voltage can be adjusted by external resistors. Both DD1V and DD5V support the switching frequencies up to 2.4 MHz to allow use of small size inductors, which can reduce a part mounting area. To decrease EMI, this IC equips a SYNC function that synchronizes to an external clock signal and a spread spectrum clock generator (SSCG). When not inputting an external clock, it operates by an internal clock. The SSCG is valid both internal clock and external clock. Moreover, this IC has power good (PG) monitors for each output and a thermal-warning indicator.


Features

- Wide input voltage range : 2.5V to 42V (DD3V)
- Adjustable output voltage with pairs of resistors
 - DD1V : 1.0V to 1.3V
 - DD3V : 3.2V to 3.4V
 - DD5V : 5.0V to 5.2V
- Switching frequency range (synchronizable to external clock by SYNC function)
 - DD1V, DD5V
 - Internal clock operation : 2.1 MHz (Typ)
 - External clock operation : 1.8 MHz to 2.4 MHz
 - DD3V (one-fifth-divided clock)
 - Internal clock operation : 420 kHz (Typ)
 - External clock operation : 360 kHz to 480 kHz
- Super-high efficiency by PFM operation (DD3V, DD5V : When fixing SYNC pin to a low level)
- Automatic PWM/PFM switching and fixed PWM operations are settable by SYNC pin (DD3V, DD5V)
- Operable on up to 100% duty (DD3V)
- Built-in phase compensators
- Built-in SSCG (spread spectrum clock generator)
- Synchronous rectification current mode architecture
- Shutdown current : 1 μA (Typ)
- Quiescent current : 15 μA (Typ)
- Load-independent soft-start
- Power good monitors for each output
 - OVD (over voltage detection)
 - UVD (under voltage detection)
- Enhanced protection functions
 - UVLO (under voltage lockout)
 - OVP (over voltage protection)
 - OCP (over current protection)
 - TSD (thermal shutdown)
 - TWI (thermal warning indicator)
- Wettable QFN-32 package : 5 mm \times 5 mm
- AEC-Q100 compliant (Grade-2)

Applications

- Instrument cluster
- Automotive applications
- Industrial applications

Block Diagram

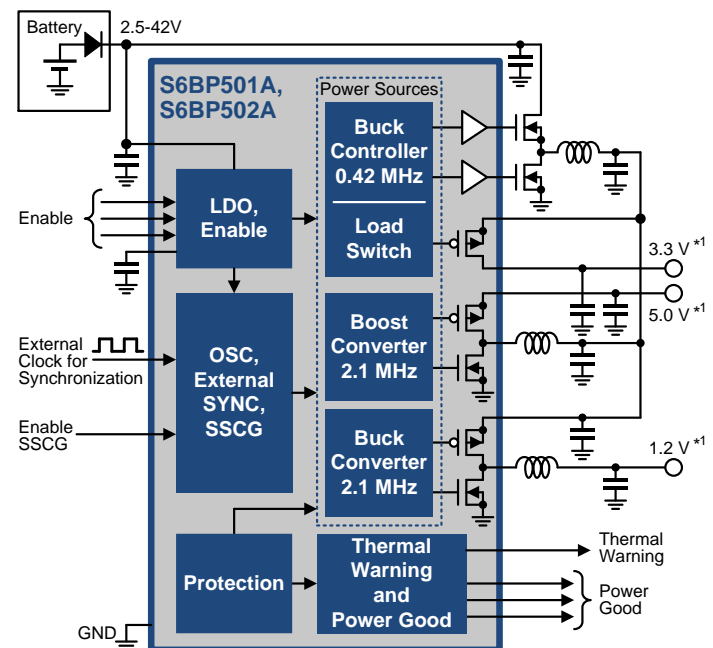

*1: Output voltages are finely adjustable with external resistive dividers

More Information

Cypress provides a wealth of data at www.cypress.com/pmic to help you to select the right PMIC device for your design, and to help you to quickly and effectively integrate the device into your design. Following is an abbreviated list for S6BP501A and S6BP502A:

- Overview: [Automotive PMIC Portfolio](#), [Automotive PMIC Roadmap](#)
- Product Selector:
 - [S6BP501A, S6BP502A](#):
3ch Automotive PMIC for Instrument Cluster
- Application Notes: Cypress offers S6BP501A and S6BP502A application notes. Recommended application notes for getting started with S6BP501A and S6BP502A are:
 - [AN99435](#): Designing a Power Management System
 - [AN201006](#): Thermal Considerations and Parameters
- Evaluation Kit Operation Manual:
 - [S6SBP501A00VA1001, S6SBP502A00VA1001](#):
Power block of automotive instrument cluster
- Related Products:
 - [S6BP201A, S6BP202A, S6BP203A](#):
1ch Buck-Boost Automotive PMIC
 - [S6BP401A](#):
6ch Automotive PMIC for ADAS

Contents

| | |
|--|-----------|
| Features | 1 |
| Applications | 1 |
| Block Diagram | 1 |
| More Information | 2 |
| 1. Product Lineup | 4 |
| 2. Pin Assignment | 4 |
| 3. Pin Descriptions | 5 |
| 4. Architecture Block Diagram | 7 |
| 5. Absolute Maximum Ratings | 8 |
| 6. Recommended Operating Conditions | 9 |
| 7. Electrical Characteristics | 10 |
| 8. Functional Description | 14 |
| 8.1 Operation Sequence..... | 14 |
| 8.2 Each Function Block..... | 15 |
| 8.3 Output State and Protection Function Table..... | 18 |
| 9. Application Circuit Example and Parts List | 19 |
| 10. Application Note | 21 |
| 10.1 Setting the Operation Conditions..... | 21 |
| 11. Reference Data | 24 |
| 12. Usage Precaution | 31 |
| 13. RoHS Compliance Information | 31 |
| 14. Ordering Information | 31 |
| 15. Package Dimensions | 32 |
| Document History | 33 |
| Sales, Solutions, and Legal Information | 35 |


1. Product Lineup

To order a product, select an item from the product lineup blow. For information on the ordering part number, please see "14. Ordering Information".

| Product Name | S6BP501A | S6BP502A | |
|----------------------------|-----------------|--------------|------|
| Pin count | 32 | | |
| Power supply voltage range | 2.5V to 42V | | |
| Output voltage range | DD1V | 1.0V to 1.3V | |
| | DD3V | 3.2V to 3.4V | |
| | DD5V | 5.0V to 5.2V | |
| Maximum output current | DD1V | 1.4A | 2.0A |
| | SW3V (*1) | 1.6A | 1.9A |
| | DD5V | 1.3A | 1.3A |
| Package | QFN-32 (VNG032) | | |

*1: Load switch for DD3V. Each value is the maximum output current via SW3V.

2. Pin Assignment

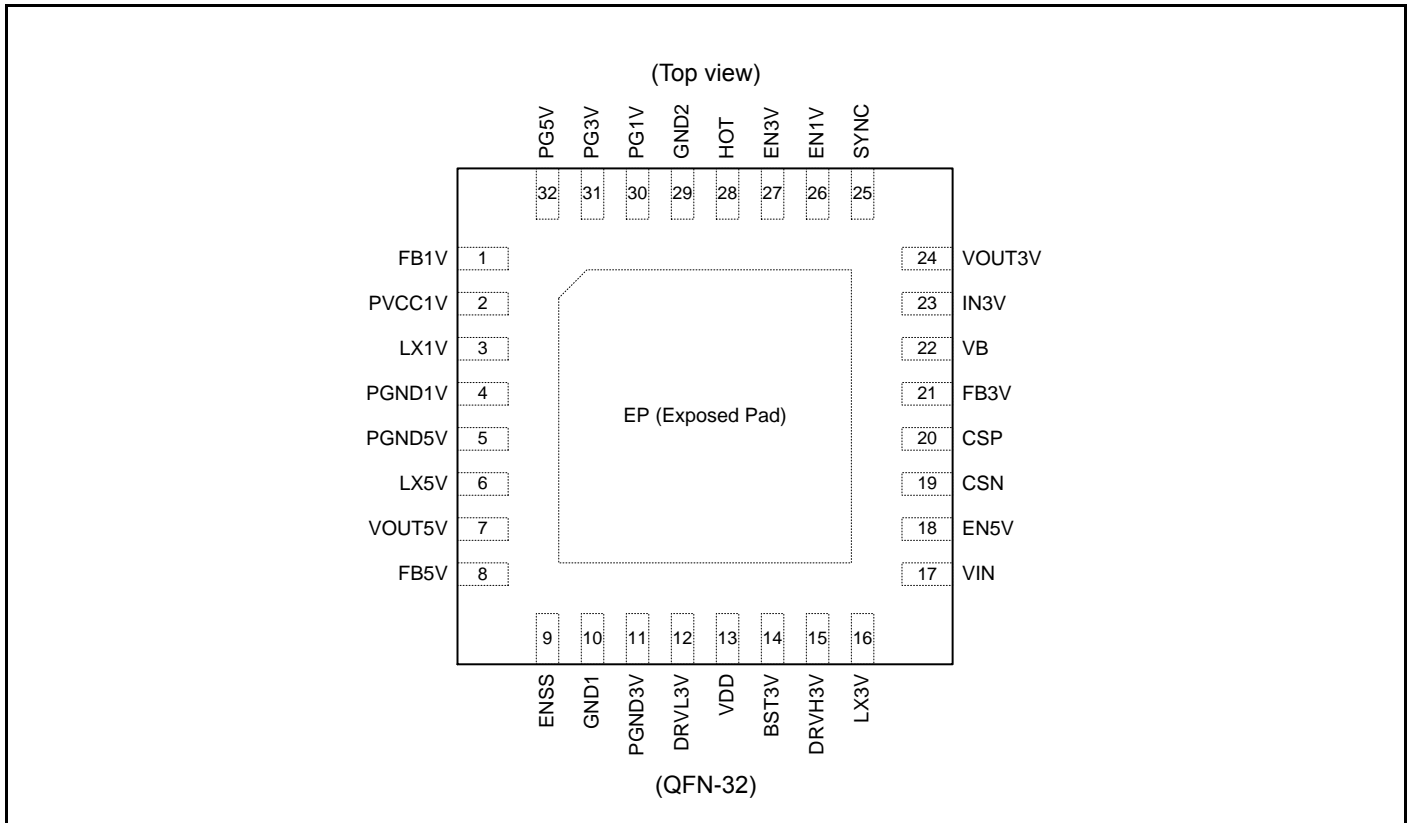


3. Pin Descriptions


Table 3-1 Pin Descriptions

| Pin No. | Pin Name | I/O | Description |
|---------|----------|-----|--|
| 1 | FB1V | I | Feedback pin for DD1V output voltage |
| 2 | PVCC1V | - | Power supply pin for DD1V |
| 3 | LX1V | O | Inductor connection pin for DD1V |
| 4 | PGND1V | - | Power ground pin for DD1V |
| 5 | PGND5V | - | Power ground pin for DD5V |
| 6 | LX5V | O | Inductor connection pin for DD5V |
| 7 | VOU5V | O | Voltage output pin for DD5V |
| 8 | FB5V | I | Feedback pin for DD5V output voltage |
| 9 | ENSS | I | Enable pin for SSCG (When not being used, connect this pin to ground pin. For the pin setting, see "Table 8-1 SSCG Pin Setting".) |
| 10 | GND1 | - | Ground pin |
| 11 | PGND3V | - | Power ground for DD3V |
| 12 | DRVL3V | O | Low-side FET gate driver output pin for DD3V |
| 13 | VDD | I | Power supply pin for gate driver for DD3V |
| 14 | BST3V | I | Boost capacitor connection pin for DD3V |
| 15 | DRVH3V | O | High-side FET gate driver output pin for DD3V |
| 16 | LX3V | O | Inductor connection pin for DD3V |
| 17 | VIN | I | Power supply pin connecting battery |
| 18 | EN5V | I | Enable pin for DD3V and DD5V |
| 19 | CSN | I | Negative current sense pin |
| 20 | CSP | I | Positive current sense pin |
| 21 | FB3V | I | Feedback pin for DD3V output voltage |
| 22 | VB | O | Bias voltage output pin and power supply pin for logic Do NOT connect any loads to this pin |
| 23 | IN3V | I | Power supply pin for load switch (SW3V) and DD1V |
| 24 | VOUT3V | O | Voltage output pin for DD3V via load switch (SW3V) |
| 25 | SYNC | I | External clock input / SYNC function setting pin (For the pin setting, see "Table 8-2 SYNC Pin Setting".) |
| 26 | EN1V | I | Enable pin for DD1V |
| 27 | EN3V | I | Enable pin for SW3V load switch (SW3V) |
| 28 | HOT | O | Open drain type power good output pin for thermal warning indicator (When not being used, connect this pin to ground pin) |
| 29 | GND2 | - | Ground pin |
| 30 | PG1V | O | Open drain type power good output pin for DD1V (When not being used, connect this pin to ground pin) |
| 31 | PG3V | O | Open drain type power good output pin for DD3V (When not being used, connect this pin to ground pin) |
| 32 | PG5V | O | Open drain type power good output pin for DD5V (When not being used, connect this pin to ground pin) |

Figure 3-1 I/O Pin Equivalent Circuit Diagram

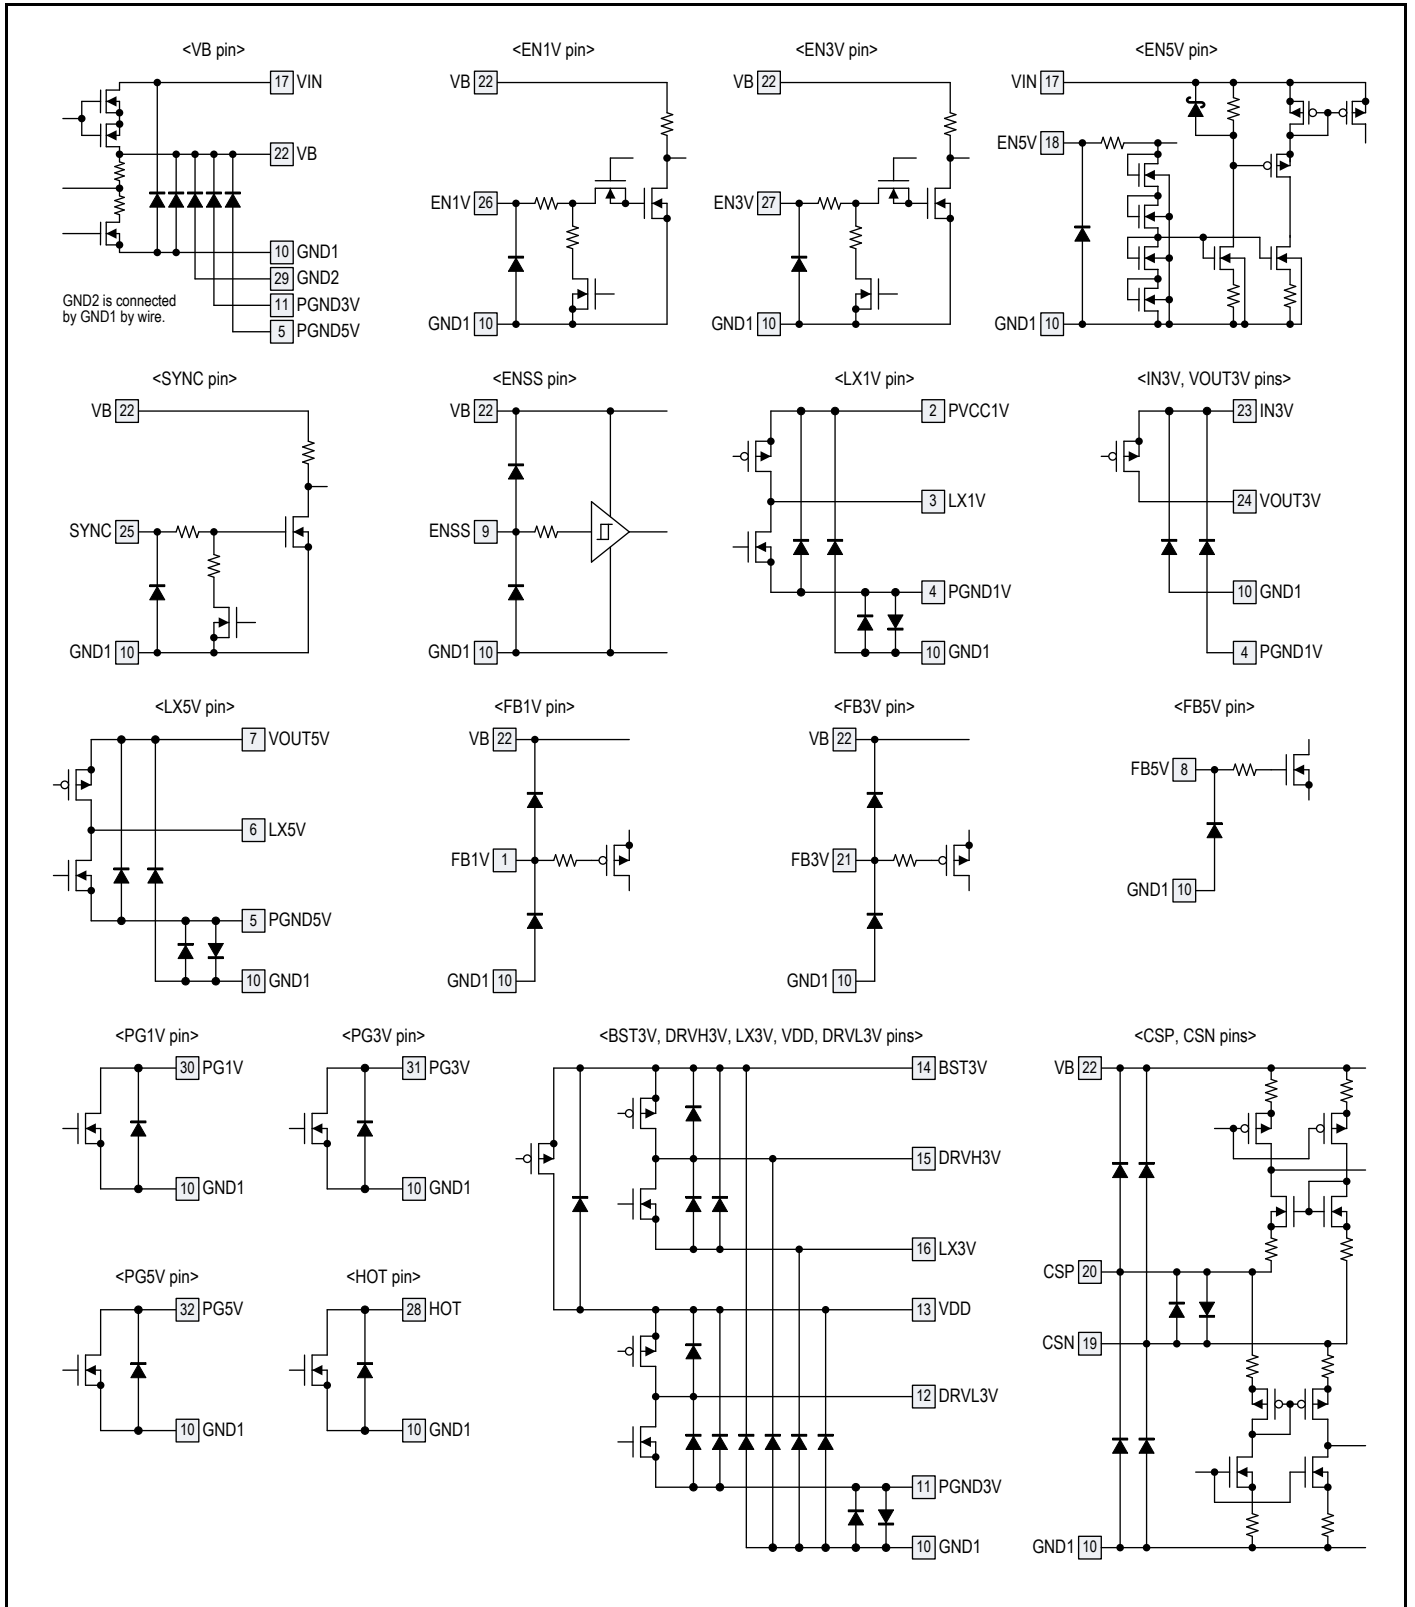

4. Architecture Block Diagram

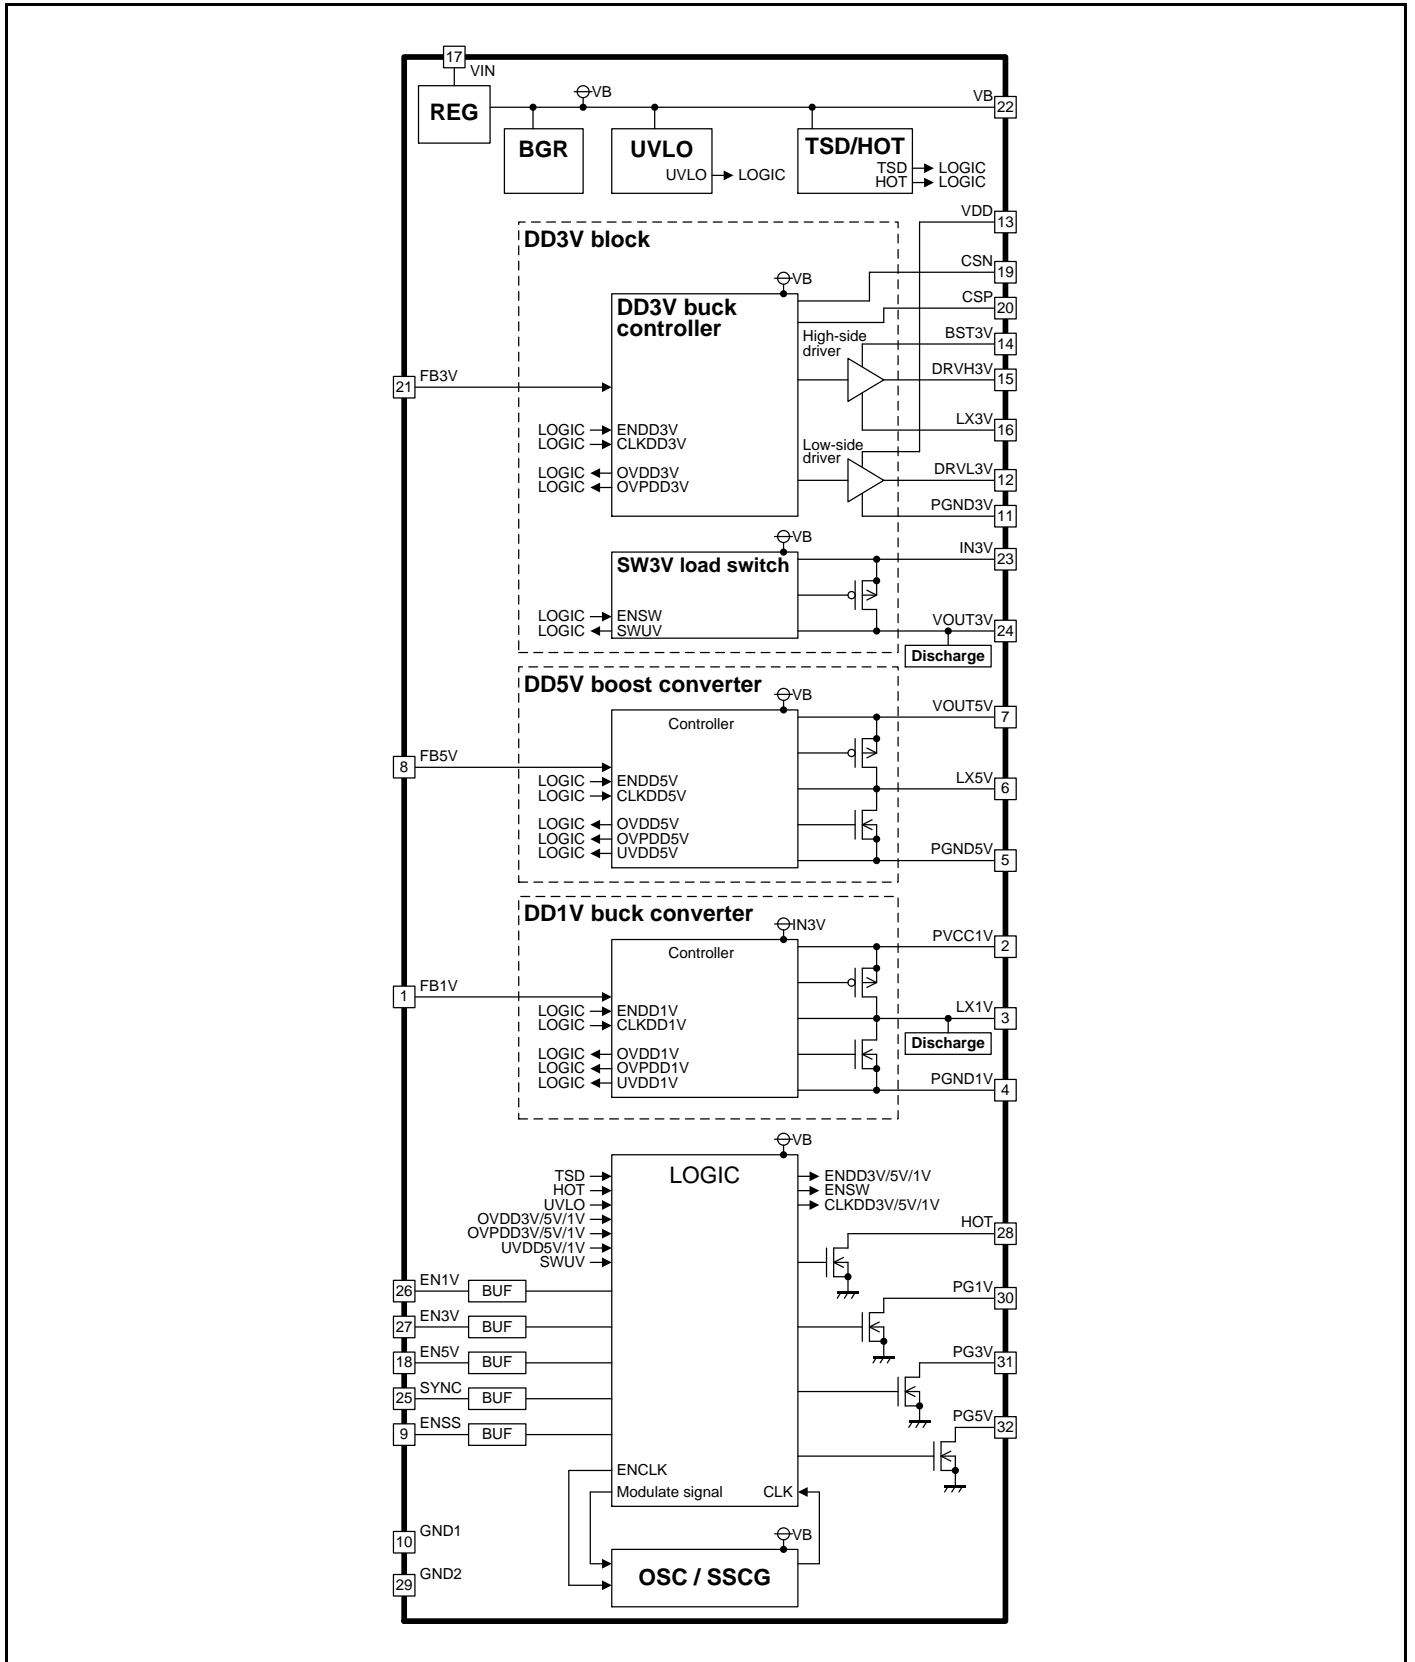

5. Absolute Maximum Ratings

| Parameter | Symbol | Condition | Rating | | Unit |
|---------------------------|----------------------------|--------------------------------|--------|-----------------|------|
| | | | Min | Max | |
| Power supply voltage (*1) | V _{VIN} | VIN pin | -0.3 | +48 | V |
| | V _{VB} | VB pin | -0.3 | +6.9 | V |
| | V _{VDD} | VDD pin | -0.3 | +6.9 | V |
| | V _{PVCC1V} | PVCC1V pin | -0.3 | +6.9 | V |
| Pin voltage (*1) | V _{IN3V} | IN3V pin | -0.3 | +6.9 | V |
| | V _{BST3V} | BST3V pin | -0.3 | +48 | V |
| | V _{CSN} | CSN pin | -0.3 | V _{VB} | V |
| | V _{CSP} | CSP pin | -0.3 | V _{VB} | V |
| | V _{FB1V} | FB1V pin | -0.3 | V _{VB} | V |
| | V _{FB3V} | FB3V pin | -0.3 | V _{VB} | V |
| | V _{FB5V} | FB5V pin | -0.3 | +6.9 | V |
| | V _{EN1V} | EN1V pin | -0.3 | +6.9 | V |
| | V _{EN3V} | EN3V pin | -0.3 | +6.9 | V |
| | V _{EN5V} | EN5V pin | -0.3 | +48 | V |
| | V _{PG1V} | PG1V pin | -0.3 | +6.9 | V |
| | V _{PG3V} | PG3V pin | -0.3 | +6.9 | V |
| | V _{PG5V} | PG5V pin | -0.3 | +6.9 | V |
| | V _{HOT} | HOT pin | -0.3 | +6.9 | V |
| | V _{ENSS} | ENSS pin | -0.3 | V _{VB} | V |
| V _{SYNC} | SYNC pin | -0.3 | +6.9 | V | |
| LX voltage (*1) | V _{LX1V} | LX1V pin | -0.3 | +6.9 | V |
| | V _{LX3V} | LX3V pin | -0.3 | +48 | V |
| | V _{LX5V} | LX5V pin | -0.3 | +6.9 | V |
| Difference voltage | V _{BST3V_LX3V} | BST3V to LX3V | -0.3 | +6.9 | V |
| | V _{DRVH3V_LX3V} | DRVH3V to LX3V | -0.3 | +6.9 | V |
| | V _{DRVL3V_PGND3V} | DRVL3V to PGND3V | -0.3 | +6.9 | V |
| | V _{LX5V_VOUT5V} | LX5V to VOUT5V | -0.3 | +6.9 | V |
| | V _{LX1_PVCC1V} | LX1 to PVCC1V | -0.3 | +6.9 | V |
| | V _{PGND1_GND} | PGND1V to GND1, PGND1V to GND2 | -0.3 | +0.3 | V |
| | V _{PGND3_GND} | PGND3V to GND1, PGND3V to GND2 | -0.3 | +0.3 | V |
| | V _{PGND5_GND} | PGND5V to GND1, PGND5V to GND2 | -0.3 | +0.3 | V |
| | V _{VIN_EN5V} | VIN to EN5V | -0.3 | +48 | V |
| Output current | I _{PG} | PG1V, PG3V, PG5V sink current | -3 | 0 | mA |
| | I _{HOT} | HOT sink current | -3 | 0 | mA |
| Power dissipation (*1) | P _D | T _a ≤ ±25°C | 0 | 4280 (*2) | mW |
| Storage temperature | T _{STG} | - | -55 | +150 | °C |

*1: PGND1V = PGND3V = PGND5V = GND1 = GND2 = 0V

*2: When the product is mounted on 76.2 mm × 114.3 mm, four-layer FR-4 board

Warning:

- Semiconductor devices may be permanently damaged by application of stress (including, without limitation, voltage, current or temperature) in excess of absolute maximum ratings. Do not exceed any of these ratings.

6. Recommended Operating Conditions

| Parameter | Symbol | Condition | | Value | | | Unit |
|-------------------------------|------------------------|--|--|-------|---------------------|------------------|------|
| | | | | Min | Typ | Max | |
| Power supply voltage (*1) | V _{VIN_START} | VIN pin | At initial start-up | +6.8 | - | - | V |
| | V _{VIN} | VIN pin | After start-up | +4.5 | +12 | +42 | V |
| | | | After start-up, Ta = 25°C | +3.7 | +12 | +42 | V |
| | | | After start-up, Ta = 25°C, VOUT5V current = 1 mA, V _{EN1V} = V _{EN3V} = 0V | +2.5 | +12 | +42 | V |
| | V _{VDD} | VDD pin | | - | V _{VOUT5V} | - | V |
| | V _{PVCC1V} | PVCC1V pin | | - | +3.3 | - | V |
| V _{IN3V} | IN3V pin | | - | +3.3 | - | V | |
| Pin voltage (*1) | V _{EN1V} | EN1V pin | | 0 | - | +5.5 | V |
| | V _{EN3V} | EN3V pin | | 0 | - | +5.5 | V |
| | V _{EN5V} | EN5V pin | | 0 | - | V _{VIN} | V |
| | V _{PG1V} | PG1V pin | | 0 | - | +5.5 | V |
| | V _{PG3V} | PG3V pin | | 0 | - | +5.5 | V |
| | V _{PG5V} | PG5V pin | | 0 | - | +5.5 | V |
| | V _{HOT} | HOT pin | | 0 | - | +5.5 | V |
| | V _{ENSS} | ENSS pin | | 0 | - | V _{VB} | V |
| V _{SYNC} | SYNC pin | | 0 | - | +5.5 | V | |
| Input clock frequency | F _{SYNC} | SYNC pin | | 1.8 | 2.1 | 2.4 | MHz |
| Input clock duty range | D _{SYNC} | SYNC pin | | 48 | 50 | 52 | % |
| LX voltage (*1) | V _{LX5V} | LX5V pin | | 0 | - | +5.5 | V |
| DD1V output voltage (*1) | V _{VOUT1V} | Voltage of DD1V output capacitor | | 1.0 | - | 1.3 | V |
| DD3V output voltage (*1) | V _{IN3V} (*2) | Voltage of DD3V output capacitor, IN3V pin | | 3.2 | - | 3.4 | V |
| DD5V output voltage (*1) | V _{VOUT5V} | VOUT5V pin | | 5.0 | - | 5.2 | V |
| BST capacitance | C _{BST} | BST3V to LX3V | | 0.068 | 0.1 | 0.47 | μF |
| VB capacitance | C _{VB} | VB to GND | | 2.2 | 4.7 | 10 | μF |
| Operating ambient temperature | Ta | - | | -40 | +25 | +105 | °C |

*1: PGND1V = PGND3V = PGND5V = GND1 = GND2 = 0V

*2: V_{IN3V} is defined as DD3V output voltage, and V_{VOUT3V} (VOUT3V pin voltage) is defined as the DD3V output voltage via SW3V.

Warning:

1. The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated under these conditions.
2. Any use of semiconductor devices will be under their recommended operating condition.
3. Operation under any conditions other than these conditions may adversely affect reliability of device and could result in device failure.
4. No warranty is made with respect to any use, operating conditions or combinations not represented on this data sheet. If you are considering application under any conditions other than listed herein, please contact sales representatives beforehand.

7. Electrical Characteristics

$$V_{VIN} = V_{EN5V} = 12V, V_{PVCC1V} = 3.3V, V_{VB} = V_{VDD} = V_{EN1V} = V_{EN3V} = 5.0V$$

(Unless specified otherwise, these are the electrical characteristics under the recommended operating environment.)

| Parameter | Symbol | Condition | Value | | | Unit | | |
|----------------------|---|-------------------|---|----------|-------------------|-----------|-------------------|------------|
| | | | Min | Typ | Max | | | |
| Supply current | Shutdown current | I_{SHDN} | VIN pin current, $V_{VIN} = 12V,$ $V_{EN1V} = V_{EN3V} = V_{EN5V} = 0V$ | | - | 1.0 | 2.0 | μA |
| | Quiescent current | I_q | VIN pin current, $V_{VIN} = 12V, V_{SYNC} = 0V,$ $V_{EN1V} = V_{EN3V} = 0V, V_{EN5V} = 12V,$ All DC/DC converters with no load, External FET: NVTFS5826NL | | - | 15 (*1) | 25 (*1) | μA |
| | VB supply current | I_{VB} | VB pin current, $V_{VB} = 5V, V_{SYNC} = V_{VB},$ $V_{EN1V} = V_{EN3V} = 5V, V_{EN5V} = 12V,$ All DC/DC converters with no load | | - | 20 | 25 | mA |
| UVLO block | IC operation start voltage | V_{UVLO_START} | VB pin, V_{VB} rising | | 4.3 | 4.4 | 4.5 | V |
| | IC shutdown voltage | V_{UVLO_SHDN} | VB pin, V_{VB} falling | | 4.2 | 4.3 | 4.4 | V |
| DD1V block | Feedback voltage | V_{FB1V} | FB1V pin | | 0.591 (-1.5%) | 0.6 | 0.609 (+1.5%) | V |
| | Output regulation | - | DD1V output voltage (V_{VOUT1V}), $V_{PVCC1V} = V_{IN3V} = 3.3V,$ $I_{VOUT1V} = 0$ to 2.0A | | -1.5 (*1) | - | +1.5 (*1) | % |
| | Over voltage protection (OVP) voltage | V_{OVPR_1V} | Monitoring V_{FB1V} rising | | 128.0 | 131.5 | 135.0 | % |
| | Over voltage protection release voltage | V_{OVPF_1V} | Monitoring V_{LX1V} falling | | - | - | 0.94 (*1) | V |
| | High-side FET ON resistance | R_{ONH_1V} | $I_{LX1V} = 50$ mA (PVCC1V to LX1V) | | - | 130 | 260 | m Ω |
| | Low-side FET ON resistance | R_{ONL_1V} | $I_{LX1V} = -50$ mA (LX1V to PGND1V) | | - | 100 | 200 | m Ω |
| | FET leak current | I_{LEAK_1V} | $V_{PVCC1V} = 5.0V, V_{EN1V} = 0V$ | | - | - | 3 | μA |
| | Maximum output current | I_{OUTMAX_1V} | L = 1.5 μH | S6BP501A | 1.4 (*1) | - | - | A |
| | | | | S6BP502A | 2.0 (*1) | - | - | A |
| | Over current protection current (LX peak current) | I_{LXPEAK_1V} | L = 1.5 μH | S6BP501A | 1.75 (*1) | - | - | A |
| | | | | S6BP502A | 2.5 (*1) | - | - | A |
| Discharge resistance | R_{DIS_1V} | LX1V pin | | 280 | 400 | 520 | Ω | |
| Soft-start time | t_{SS_1V} | - | | 0.5 | 1.0 | 2.0 | ms | |
| DD3V block | Feedback voltage | V_{FB3V} | FB3V pin | | 0.8865 (-1.5%) | 0.9 | 0.9135 (+1.5%) | V |
| | Output regulation | - | IN3V pin, $V_{VIN} = 4.5V$ to 42V, $I_{IN3V} = 0A$ to 5.1A | | -1.25 (*1) | - | +1.25 (*1) | % |
| | PWM/PFM switching current | $I_{PWMPPFM_3V}$ | - | | - | 1000 (*1) | - | mA |
| | Over voltage protection (OVP) voltage | V_{OVPR_3V} | Monitoring V_{CSN} rising | | 3.70 | 3.85 | 4.00 | V |
| | Over voltage protection release voltage | V_{OVPF_3V} | Monitoring V_{IN3V} falling | | - | - | 0.94 (*1) | V |
| | Dead time | t_{DEAD_3V} | - | | 10 | 20 | - | ns |
| | Maximum duty cycle | D_{MAX_3V} | $V_{VIN} < V_{IN3V}$ | | - | - | 100 | % |
| Soft-start time | t_{SS_3V} | - | | 0.5 | 1.0 | 2.0 | ms | |

$V_{VIN} = V_{EN5V} = 12V$, $V_{PVCC1V} = 3.3V$, $V_{VB} = V_{VDD} = V_{EN1V} = V_{EN3V} = 5.0V$

(Unless specified otherwise, these are the electrical characteristics under the recommended operating environment.)

| Parameter | | | Symbol | Condition | Value | | | Unit |
|-----------------|---|----------------------------|---|---|----------|---------------|------------|------------|
| | | | | | Min | Typ | Max | |
| DD3V block | High-side output driver | ON resistance | R_{ONH_3V} | DRVH3V pin current = 10 mA, (BST3V to DRVH3V) | - | 15 | 30 | Ω |
| | | | R_{ONL_3V} | DRVH3V pin current = -50 mA, (DRVH3V to LX3V) | - | 1 | 3 | Ω |
| | Low-side output driver | ON resistance | R_{ONH_3V} | DRVL3V pin current = 50 mA, (LX3V to DRVL3V) | - | 1.5 | 4 | Ω |
| | | | R_{ONL_3V} | DRVL3V pin current = -50 mA, (DRVL3V to LX3V) | - | 0.75 | 2 | Ω |
| | Boost switch | ON resistance | R_{ON_BSTSW} | $I_{BST3V} = 10\text{ mA}$ | - | 8 | 24 | Ω |
| | | Leak current | I_{R_BSTSW} | $V_{BST3V} = 47V$ | - | - | 2 | μA |
| | Output current monitor | Over current limit | - | $V_{CSP} - V_{CSN}$ | 60 | 80 | 100 | mV |
| | | CSP input current | I_{CSP} | Fixed PWM operation | - | 2 | 5 | μA |
| | | CSN input current | I_{CSN} | Fixed PWM operation | - | 8 | 20 | μA |
| | SW3V block | ON resistance | R_{ON_SW3V} | IN3V to VOUT3V current = 50 mA | - | - | 100 | m Ω |
| | | Maximum output current | I_{LOAD_SW3V} | S6BP501A | 1.6 (*1) | - | - | A |
| | | | | S6BP502A | 1.9 (*1) | - | - | A |
| | | Leak current | I_{LEAK_SW3V} | $V_{IN3V} = 3.3V$, $V_{EN3V} = 0V$ | - | - | 3 | μA |
| | | Discharge resistance | R_{DIS_SW3V} | - | 280 | 400 | 520 | Ω |
| Soft-start time | t_{SS_SW3V} | - | 1.0 | 2.0 | 4.0 | ms | | |
| DD5V block | Feedback voltage | V_{FB5V} | FB5V pin | 1.182 (-1.5%) | 1.2 | 1.218 (+1.5%) | V | |
| | Output regulation | - | DD5V output voltage (V_{VOUT5V}), $V_{IN3V} = 3.3V$, $I_{VOUT5V} = 0A$ to 1.3A | -3.0 (*1) | - | +3.0 (*1) | % | |
| | PWM/PFM switching current | I_{PWMPFM_5V} | - | - | 300 (*1) | - | mA | |
| | Over voltage protection (OVP) voltage | V_{OVPR_5V} | Monitoring V_{VOUT5V} rising | 5.6 | 5.8 | 6.0 | V | |
| | Over voltage protection release voltage | V_{OVPR_5V} | Monitoring V_{VOUT5V} falling | - | - | 0.94 (*1) | V | |
| | High-side FET ON resistance | R_{ONH_5V} | $I_{LX5V} = 50\text{ mA}$ (V_{VOUT5V} to LX5V) | - | 130 | 260 | m Ω | |
| | Low-side FET ON resistance | R_{ONL_5V} | $I_{LX5V} = -50\text{ mA}$ (LX5V to PGND5V) | - | 100 | 200 | m Ω | |
| | FET leak current | I_{LEAK_5V} | $V_{VOUT5V} = 5.0V$, $V_{EN5V} = 0V$ | - | - | 3 | μA | |
| | Maximum output current | I_{OUT_MAX5V} | L = 1.5 μH | S6BP501A | 1.3 (*1) | - | - | A |
| | | | | S6BP502A | 1.3 (*1) | - | - | A |
| | Over current protection current (LX peak current) | I_{LX_PEAK5V} | L = 1.5 μH | S6BP501A | 2.5 (*1) | - | - | A |
| | | | | S6BP502A | 2.5 (*1) | - | - | A |
| Soft-start time | t_{SS_5V} | $V_{VOUT5V} = 3.3V > 5.0V$ | 0.2 | 0.5 | 1.0 | ms | | |

$V_{VIN} = V_{EN5V} = 12V$, $V_{PVCC1V} = 3.3V$, $V_{VB} = V_{VDD} = V_{EN1V} = V_{EN3V} = 5.0V$

(Unless specified otherwise, these are the electrical characteristics under the recommended operating environment.)

| Parameter | | Symbol | Condition | Value | | | Unit |
|-------------|---|------------------|---------------------------------|-------|-------|-------|------------|
| | | | | Min | Typ | Max | |
| EN1V pin | ON condition | V_{ON_EN1V} | - | 2.0 | - | - | V |
| | OFF condition | V_{OFF_EN1V} | - | - | - | 0.4 | V |
| | Input current | I_{ON_EN1V} | $V_{EN1V} = 5.0V$ | - | 50 | 100 | μA |
| | Pull down resistance | R_{PULL_EN1V} | - | 50 | 100 | 150 | k Ω |
| EN3V pin | ON condition | V_{ON_EN3V} | - | 2.0 | - | - | V |
| | OFF condition | V_{OFF_EN3V} | - | - | - | 0.4 | V |
| | Input current | I_{ON_EN3V} | $V_{EN3V} = 5.0V$ | - | 50 | 100 | μA |
| | Pull down resistance | R_{PULL_EN3V} | - | 50 | 100 | 150 | k Ω |
| EN5V pin | ON condition | V_{ON_EN5V} | - | 2.5 | - | - | V |
| | OFF condition | V_{OFF_EN5V} | - | - | - | 0.2 | V |
| | Input current | I_{ON_EN5V} | $V_{EN5V} = 12.0V$ | - | 1 | 3 | μA |
| | | I_{OFF_EN5V} | $V_{EN5V} = 0V$ | - | 0 | 1 | μA |
| PG1V pin | Over voltage detection (OVD) voltage | V_{OVDR_PG1V} | Monitoring V_{FB1V} rising | 105.0 | 106.5 | 108.0 | % |
| | Over voltage detection release voltage | V_{OVDF_PG1V} | Monitoring V_{FB1V} falling | - | 105.5 | - | % |
| | Under voltage detection (UVD) voltage | V_{UVDF_PG1V} | Monitoring V_{FB1V} falling | 92.5 | 94.0 | 95.5 | % |
| | Under voltage detection release voltage | V_{UVDR_PG1V} | Monitoring V_{FB1V} rising | - | 95.0 | - | % |
| | Leak current | I_{LEAK_PG1V} | $V_{PG1V} = 5.0V$ | - | - | 1 | μA |
| | Low level voltage | V_{LOW_PG1V} | $I_{PG1V} = 3\text{ mA}$ | - | 0.15 | 0.30 | V |
| | Power-on reset time | t_{POR_PG1V} | $V_{SYNC} = 0V$ | 8 | 10 | 12 | ms |
| PG3V pin | Over voltage detection (OVD) voltage | V_{OVDR_PG3V} | Monitoring V_{FB3V} rising | 104.5 | 106.0 | 107.5 | % |
| | Over voltage detection release voltage | V_{OVDF_PG3V} | Monitoring V_{FB3V} falling | - | 105.0 | - | % |
| | Under voltage detection (UVD) voltage | V_{UVDF_PG3V} | Monitoring V_{VOUT3V} falling | 3.004 | 3.050 | 3.096 | V |
| | Under voltage detection release voltage | V_{UVDR_PG3V} | Monitoring V_{VOUT3V} rising | - | 3.080 | - | V |
| | Leak current | I_{LEAK_PG3V} | $V_{PG3V} = 5.0V$ | - | - | 1 | μA |
| | Low level voltage | V_{LOW_PG3V} | $I_{PG3V} = 3\text{ mA}$ | - | 0.15 | 0.30 | V |
| | Power-on reset time | t_{POR_PG3V} | $V_{SYNC} = 0V$ | 8 | 10 | 12 | ms |
| PG5V pin | Over voltage detection (OVD) voltage | V_{OVDR_PG5V} | Monitoring V_{FB5V} rising | 106.0 | 108.0 | 110.0 | % |
| | Over voltage detection release voltage | V_{OVDF_PG5V} | Monitoring V_{FB5V} falling | - | 107.0 | - | % |
| | Under voltage detection (UVD) voltage | V_{UVDF_PG5V} | Monitoring V_{FB5V} falling | 90.0 | 92.0 | 94.0 | % |
| | Under voltage detection release voltage | V_{UVDR_PG5V} | Monitoring V_{FB5V} rising | - | 93.0 | - | % |
| | Leak current | I_{LEAK_PG5V} | $V_{PG5V} = 5.0V$ | - | - | 1 | μA |
| | Low level voltage | V_{LOW_PG5V} | $I_{PG5V} = 3\text{ mA}$ | - | 0.15 | 0.30 | V |
| | Power-on reset time | t_{POR_PG5V} | $V_{SYNC} = 0V$ | 8 | 10 | 12 | ms |

$$V_{IN} = V_{EN5V} = 12V, V_{PVCC1V} = 3.3V, V_{VB} = V_{VDD} = V_{EN1V} = V_{EN3V} = 5.0V$$

(Unless specified otherwise, these are the electrical characteristics under the recommended operating environment.)

| Parameter | | Symbol | Condition | Value | | | Unit |
|-------------------------|---|------------------|---|---------------------|-----------|---------------------|------|
| | | | | Min | Typ | Max | |
| TSD block | Operation shutdown temperature | T_{TSDR} | T_j (*2) rising | - | +165 (*1) | - | °C |
| | Operation restart temperature | T_{TSDF} | T_j (*2) falling | - | +155 (*1) | - | °C |
| HOT pin | Thermal warning indicator temperature | T_{TWIR_HOT} | T_j (*2) rising | - | +140 (*1) | - | °C |
| | Thermal warning indicator release temperature | T_{TWIF_HOT} | T_j (*2) falling | - | +130 (*1) | - | °C |
| | Leak current | I_{LEAK_HOT} | $V_{HOT} = 5.0V$ | - | - | 1 | µA |
| | Low level voltage | V_{LOW_HOT} | $I_{PG} = 3\text{ mA}$ | - | 0.15 | 0.30 | V |
| OSC block | Switching frequency | F_{OSC1} | DD1V, DD5V, In internal clock operation | 1.9 | 2.1 | 2.3 | MHz |
| | | F_{OSC2} | DD3V, $F_{OSC2} = F_{OSC1} / 5$, In internal clock operation | 0.38 | 0.42 | 0.46 | MHz |
| SYNC Pin/ SYNC block | High level voltage | V_{HIGH_SYNC} | In external clock input | 2.0 | - | - | V |
| | Low level voltage | V_{LOW_SYNC} | In external clock input | - | - | 0.4 | V |
| | Input current | I_{IN_SYNC} | $V_{SYNC} = 5.0V$ | - | 50 | 100 | µA |
| | Pull down resistance | R_{PULL_SYNC} | - | 50 | 100 | 150 | kΩ |
| | Input frequency | F_{IN_SYNC} | In external clock input | 1.8 | - | 2.4 | MHz |
| | Switching frequency | F_{OSC1_SYNC} | DD1V, DD5V, $F_{OSC1_SYNC} = F_{IN_SYNC}$, In external clock operation | 1.8 | - | 2.4 | MHz |
| | | F_{OSC2_SYNC} | DD3V, $F_{OSC2_SYNC} = F_{IN_SYNC} / 5$, In external clock operation | 0.36 | - | 0.48 | MHz |
| SSCG block | Modulation range | - | $V_{ENSS} = V_{VB}$ | 3 | 6 (*1) | 9 | % |
| | Modulation frequency | F_{MOD} | Composite modulation method is used Average of modulation frequency | 3 | 4 | 5 | kHz |
| ENSS pin | ON condition | V_{ON_ENSS} | SSCG function ON | $V_{VB} \times 0.8$ | - | - | V |
| | OFF condition | V_{OFF_ENSS} | SSCG function OFF | - | - | $V_{VB} \times 0.2$ | V |
| | Input current | I_{ENSS} | - | -0.1 | - | +0.1 | µA |

*1: The electrical characteristic is ensured by statistical characterization and indirect tests.


*2: Junction temperature

8. Functional Description

8.1 Operation Sequence

The operation sequence of this IC is described in this section.

Figure 8-1 Turn On and Turn Off Sequence

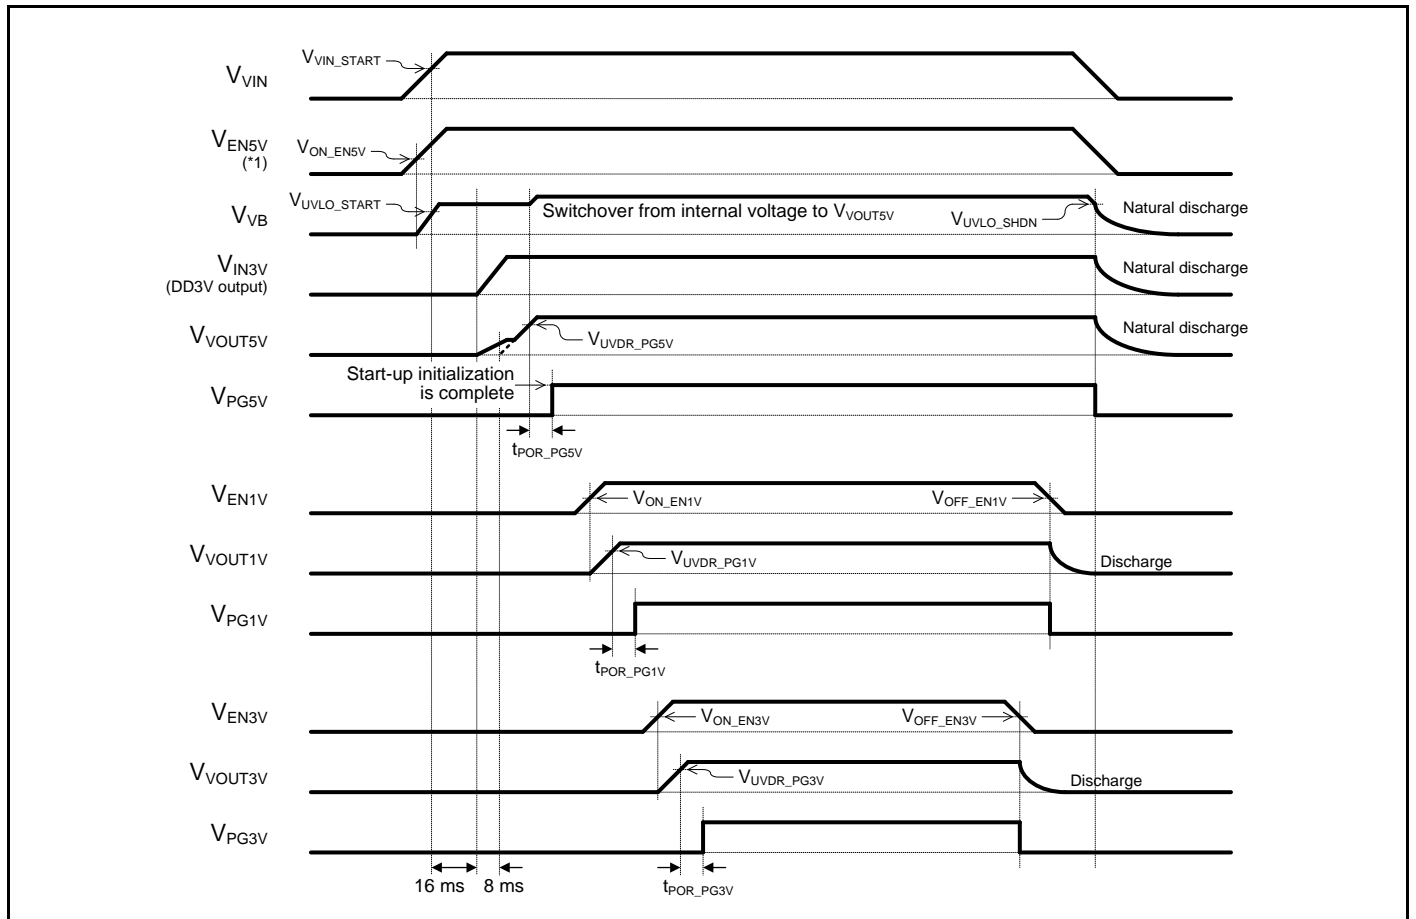

*1: When the V_{EN5V} drops to the V_{OFF_EN5V} while supplying a power to the VIN pin, the voltages, V_{PG1V} , V_{PG3V} , V_{PG5V} and V_{HOT} , are undefined.

8.2 Each Function Block

Each function block is described in this section.


Under Voltage Lockout (UVLO)

This IC equips an UVLO function in order to prevent itself from operating unintentionally and from destructing or deteriorating its subsequent devices. The UVLO block monitors the VB voltage. Once VB unintentionally drops below the IC shutdown voltage (V_{UVLO_SHDN}), UVLO block prohibits the regulators and controllers switching FETs until VB becomes higher than the IC operation start voltage (V_{UVLO_START}).

Over Voltage Detection and Protection (OVD, OVP)

When an output voltage exceeds the over voltage detection (OVD) voltage, the corresponding PG is asserted the low level. In case any output voltage exceeds the over voltage protection (OVP) voltage, all output channels stop working to protect the connected devices. When all output voltage fall below the over voltage protection release voltage, this IC returns to the normal operation.


Figure 8-2 Over Voltage Detection and Over Voltage Protection Sequence

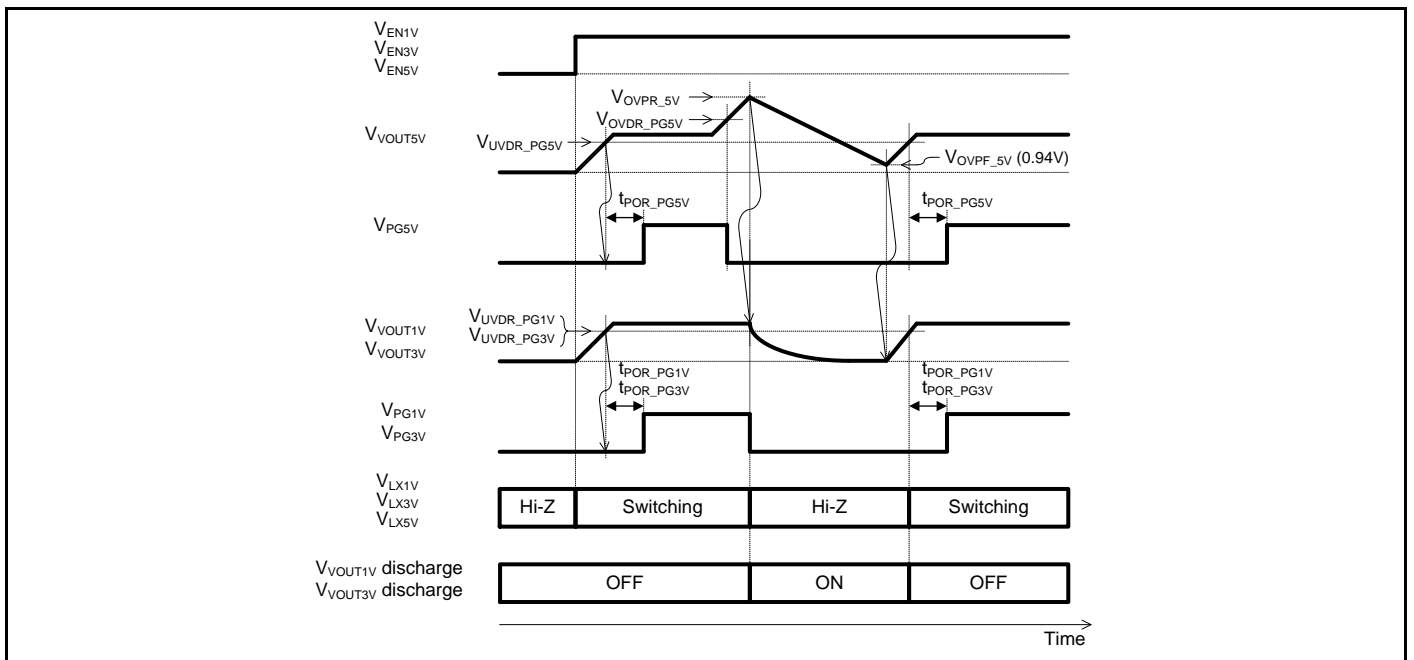

Under Voltage Detection (UVD)

When an output voltage falls below the under voltage detection (UVD) voltage, the corresponding PG pin is asserted the low level while the corresponding output channel keeps working. When the output voltage exceeds the under voltage detection release voltage, each PG will be recovered Hi-Z.

Figure 8-3 Under Voltage Detection Sequence

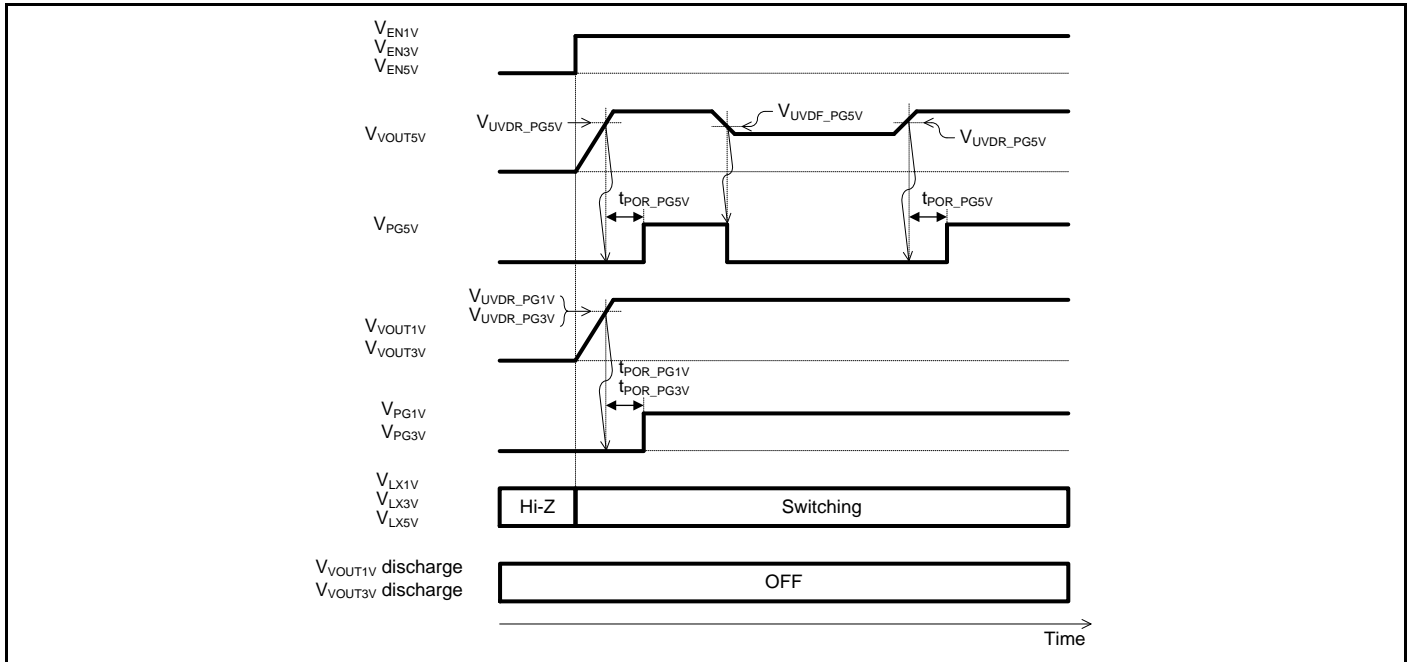

Over Current Protection (OCP)

In order to protect FETs from an excessive current, each output channel equips the OCP (over current protection) that sets current limits by monitoring the corresponding over current protection current (LX peak current).


Thermal Shutdown (TSD)

The Thermal shutdown prevents this IC from a thermal destruction. If the junction temperature exceeds +165°C, all DC/DC converters stop working. When the junction temperature falls below +155°C, this IC returns to the normal operation.

Thermal Warning Indicator (HOT)

Prior to TSD, this IC is able to notice its subsequent devices that it is close to the limit temperature. The HOT pin is an open-drain output. If the junction temperature reaches +140°C, the HOT pin is asserted the low level. When the junction temperature falls below +130°C, the HOT pin will be recovered Hi-Z.

Figure 8-4 Thermal Shutdown and Thermal Warning Indicator Sequence

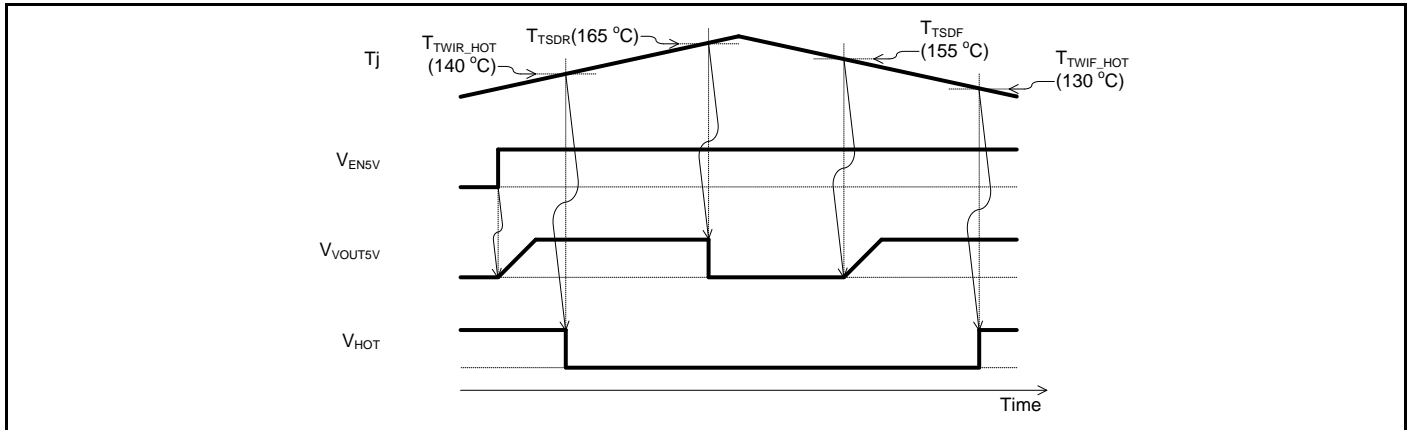

SSCG

This IC equips a SSCG (spread spectrum clock generator) function. When SSCG function turns on, it decreases EMI noise immediately. SSCG function modulates the clock signal by 0% to +6%, which clock signal can be sourced from the internal oscillator or an external clock source.

Table 8-1 SSCG Pin Setting

| ENSS Pin Setting (*1) | SSCG Operation |
|-----------------------|---|
| L | SSCG function turns off. DD1V, DD3V and DD5V are provided with non-modulated clock |
| H | SSCG function turns on. DD1V, DD3V and DD5V are provided modulated. |

*1: The H means $V_{ENSS} > V_{ON_ENSS}$. The L means $V_{ENSS} < V_{OFF_ENSS}$.

SYNC

This IC equips a SYNC function that is to synchronize with an external clock signal supplied from SYNC. Also, the switching between the automatic PWM/PFM switching operation or the fixed PWM operation is set by the SYNC pin. The Table 8-2 shows the state corresponding to each operation by the SYNC pin setting. Please refer to the Table 8-3 for the switching signals to be inputted to the SYNC pin and the availability. The switching frequency of the DD3V (F_{OSC2}) is a signal obtained by one-fifth dividing an internal clock or an inputted external clock.


Table 8-2 SYNC Pin Setting

| SYNC Pin Setting | DD1V Operation | DD3V Operation | DD5V Operation |
|------------------|--|---|---|
| L | Fixed PWM operation with internal clock | Automatic PWM/PFM switching operation with internal clock | Automatic PWM/PFM switching operation with internal clock |
| H | Fixed PWM operation with internal clock | | |
| CLK | Fixed PWM operation synchronized with external clock | | |

Table 8-3 Switching signals to be inputted to the SYNC pin

| Signals to be inputted to SYNC pin | Enable Pin Setting | | | Availability |
|------------------------------------|--------------------|--------|------|--------------|
| | EN1V | EN3V | EN5V | |
| L ↔ CLK L ↔ H | L | L | H | Prohibited |
| | L or H | H | H | Available |
| | H | L or H | H | Available |
| H ↔ CLK | L or H | L or H | H | Available |

Figure 8-5 SYNC Function Sequence

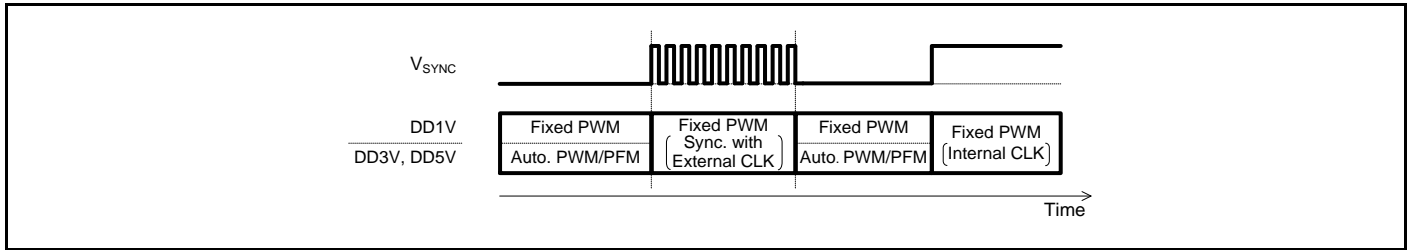

8.3 Output State and Protection Function Table

The following table shows the state of each output and each protection function.

Table 8-4 Output State and Protection Function Table

| State | Enable Pin Setting (*1) | | | Output State (*2) | | | | PG Pin Output (*3) | | | Remarks |
|-------------------------------|-------------------------|------|------|-------------------|------|------|------|--------------------|------|------|--|
| | EN1V | EN3V | EN5V | DD1V | DD3V | SW3V | DD5V | PG1V | PG3V | PG5V | |
| DD1V, SW3V, DD5V are inactive | X | X | L | INA | INA | INA | INA | L | L | L | - |
| DD5V is active | L | L | H | INA | A | INA | A | L | L | Hi-Z | - |
| SW3V, DD5V are active | L | H | H | INA | A | A | A | L | Hi-Z | Hi-Z | - |
| DD1V, DD5V are active | H | L | H | A | A | INA | A | Hi-Z | L | Hi-Z | - |
| DD1V, SW3V, DD5V are active | H | H | H | A | A | A | A | Hi-Z | Hi-Z | Hi-Z | - |
| V _{VOUT1V} OVD | H | H | H | A | A | A | A | L | Hi-Z | Hi-Z | V _{VOUT1V} > V _{OVD} _PG1V |
| V _{VOUT3V} OVD | H | H | H | A | A | A | A | Hi-Z | L | Hi-Z | V _{VOUT3V} > V _{OVD} _PG3V |
| V _{VOUT5V} OVD | H | H | H | A | A | A | A | Hi-Z | Hi-Z | L | V _{VOUT5V} > V _{OVD} _PG5V |
| V _{VOUT1V} OVP | H | X | H | INA | INA | INA | INA | L | L | L | V _{VOUT1V} > V _{OVP} _1V |
| V _{VOUT3V} OVP | X | H | H | INA | INA | INA | INA | L | L | L | V _{VOUT3V} > V _{OVP} _3V |
| V _{VOUT5V} OVP | X | X | H | INA | INA | INA | INA | L | L | L | V _{VOUT5V} > V _{OVP} _5V |
| V _{VOUT1V} UVD | H | H | H | A | A | A | A | L | Hi-Z | Hi-Z | V _{VOUT1V} < V _{UVD} _PG5V |
| V _{VOUT3V} UVD | H | H | H | A | A | A | A | Hi-Z | L | Hi-Z | V _{VOUT3V} < V _{UVD} _PG3V |
| V _{VOUT5V} UVD | H | H | H | A | A | A | A | Hi-Z | Hi-Z | L | V _{VOUT5V} < V _{UVD} _PG5V |
| TSD | X | X | H | INA | INA | INA | INA | L | L | L | T _j > T _{TSD} |

*1: The H means that each enable pin voltage is $V_{EN1V} > V_{ON_EN1V}$, $V_{EN3V} > V_{ON_EN3V}$, $V_{EN5V} > V_{ON_EN5V}$.

The L means that each enable pin voltage is $V_{EN1V} < V_{OFF_EN1V}$, $V_{EN3V} < V_{OFF_EN3V}$, $V_{EN5V} < V_{OFF_EN5V}$.


The X means that each enable pin voltage is the high level or the low level.

*2: The A means the active state. The INA means the inactive state.

*3: Each of the PG pins is formed as an open drain structure. In outputting the Hi-Z, the internal MOSFET is in the OFF state.

9. Application Circuit Example and Parts List

Figure 9-1 Application Circuit Example

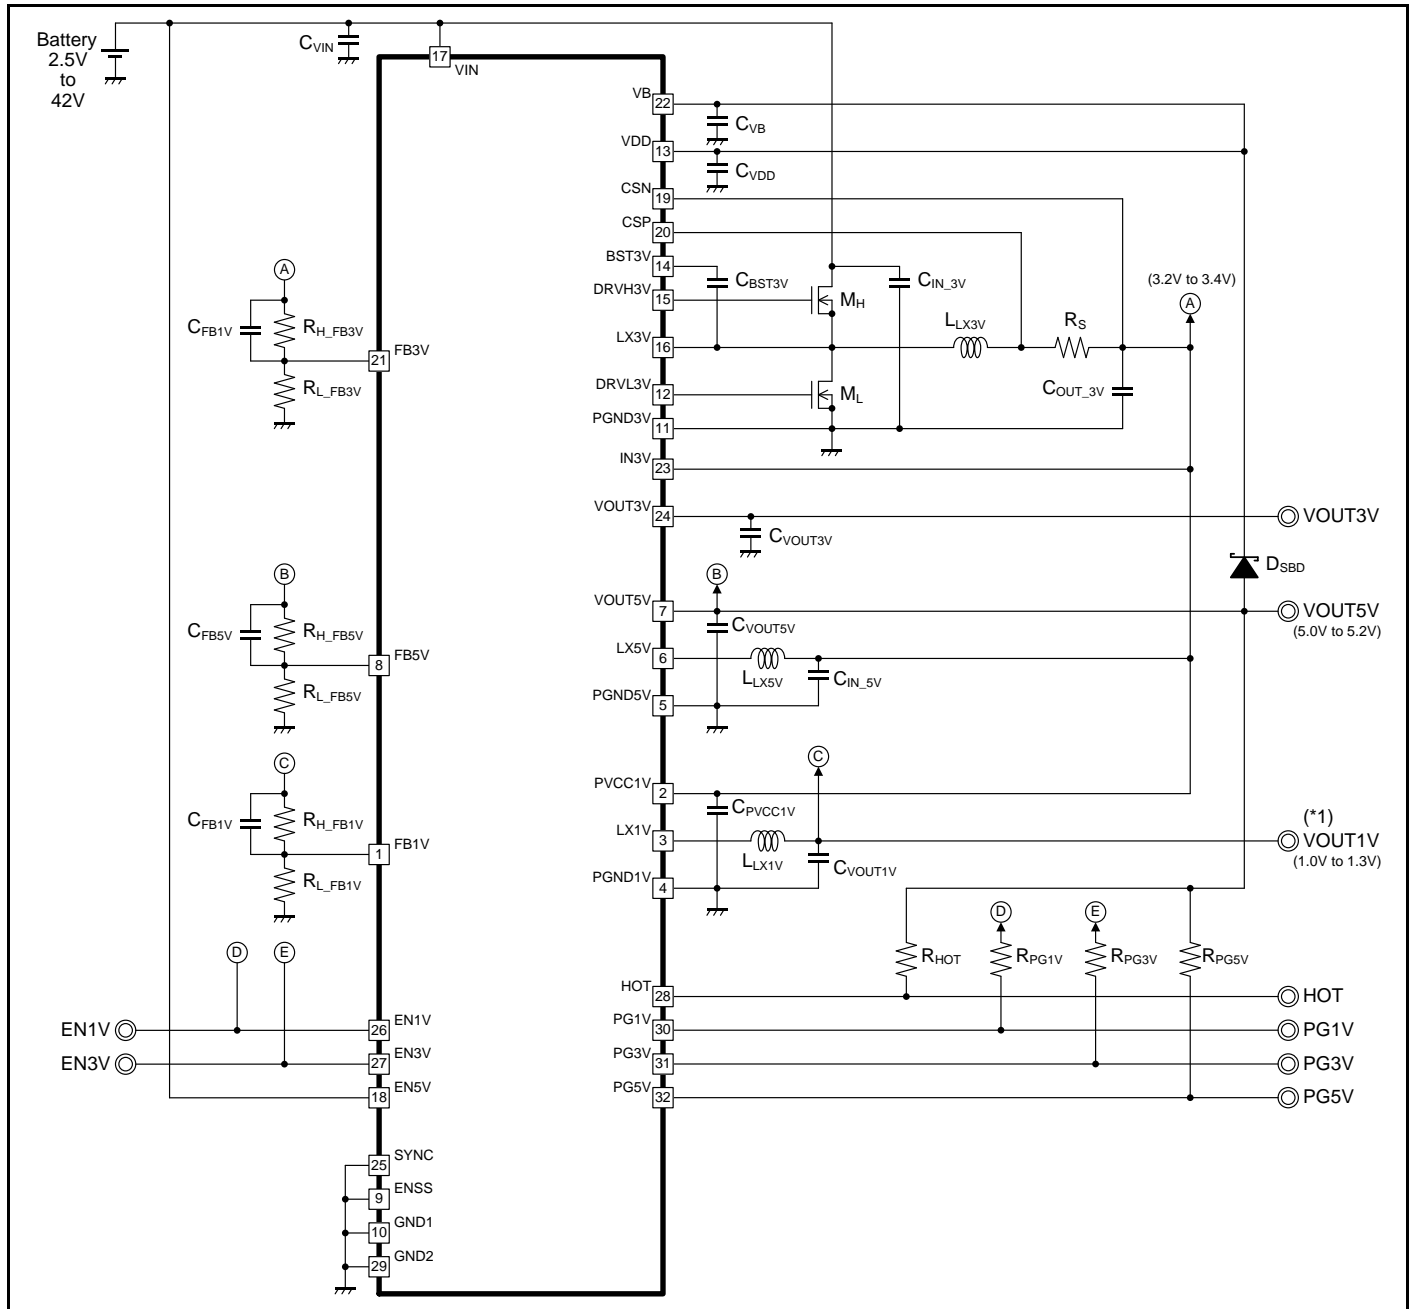

*1: The VOUT1V is a pin name only for this circuit.

Table 9-1 Parts List

| Block | Symbol | Item | Value | Part Number | Vendor | Size [mm] | Remarks |
|---------------------|---------------------|-------------|-----------------------------|----------------------|------------------|--|--|
| Common | C _{VIN} | Capacitor | 0.1 μF | CGA3E2X7R1H104K080AA | TDK | 1.6 × 0.8 × 0.8 | X7R, Rated voltage: 50 V _{DC} |
| | C _{VB} | Capacitor | 4.7 μF | CGA4J3X7R1C475K125AB | TDK | 2.0 × 1.2 × 1.25 | X7R, Rated voltage: 16 V _{DC} |
| | C _{VDD} | Capacitor | 0.1 μF | CGA3E2X7R1E104K080AA | TDK | 1.6 × 0.8 × 0.8 | X7R, Rated voltage: 25 V _{DC} |
| | D _{SBD} | SBD | V _F : 0.5V | RB521S30T1G | ON | 1.6 × 0.8 × 0.6 | V _R : 30 V _{DC} , I _F : 200 mA, I _{FSM} : 1.0A |
| DD1V | R _{H_FB1V} | Resistor | 270 kΩ (*1) | RK73H1JTTD2703F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{L_FB1V} | Resistor | 270 kΩ (*1) | RK73H1JTTD2703F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | C _{FB1V} | Capacitor | 12 pF | CGA3E2C0G1H120J080AA | TDK | 1.6 × 0.8 × 0.8 | C0G, Rated voltage: 50 V _{DC} |
| | LL _{X1V} | Inductor | 1.5 μH | CLF6045NI-1R5N-D | TDK | 7.4 × 7.0 × 4.8 | DCR: 13 mΩ, I _{DC_MAX} : 4.5A |
| | CP _{VCC1V} | Capacitor | 4.7 μF | CGA4J3X7R1C475K125AB | TDK | 2.0 × 1.2 × 1.25 | X7R, Rated voltage: 16 V _{DC} |
| | CV _{OUT1V} | Capacitor | 22 μF × 2 | CGA6P1X7R1C226M250AC | TDK | 3.2 × 2.5 × 2.5 | X7R, Rated voltage: 16 V _{DC} |
| DD3V | R _{H_FB3V} | Resistor | 200 kΩ (*2) | RK73H1JTTD2003F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | | Resistor | 120 kΩ (*2) | RK73H1JTTD1203F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{L_FB3V} | Resistor | 120 kΩ (*2) | RK73H1JTTD1203F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | C _{FB3V} | Capacitor | - | - | - | - | Unnecessary for this circuit |
| | LL _{X3V} | Inductor | 4.7 μH | CLF12577NIT-4R7N-D | TDK | 12.8 × 12.5 × 8 | DCR: 8.7 mΩ, I _{DC_MAX} : 9.6A |
| | C _{IN_3V} | Capacitor | 10 μF | CGA9N3X7R1H106K230KB | TDK | 5.7 × 5.0 × 2.3 | X7R, Rated voltage: 50 V _{DC} |
| | C _{OUT_3V} | Capacitor | 47 μF × 10 | CGA9N3X7R1C476M230KB | TDK | 5.7 × 5.0 × 2.4 | X7R, Rated voltage: 16 V _{DC} |
| | M _H | N-ch MOSFET | R _{ON_MAX} : 32 mΩ | NVTFS5826NL | ON | 3.3 × 3.3 × 0.75 | V _{DS} : 60V, I _D : 10A |
| | M _L | N-ch MOSFET | R _{ON_MAX} : 32 mΩ | NVTFS5826NL | ON | 3.3 × 3.3 × 0.75 | V _{DS} : 60V, I _D : 10A |
| | C _{BST3V} | Capacitor | 0.1 μF | CGA3E2X7R1H104K080AA | TDK | 1.6 × 0.8 × 0.8 | X7R, Rated voltage: 50 V _{DC} |
| R _S | Resistor | 10 mΩ | KRL2012-M-R010-F-T1 | KOA | 2.0 × 1.25 × 0.5 | Rated power: 1W | |
| SW3V | CV _{OUT3V} | Capacitor | 22 μF | CGA6P1X7R1C226M250AC | TDK | 3.2 × 1.6 × 1.6 | X7R, Rated voltage: 16 V _{DC} |
| DD5V | R _{H_FB5V} | Resistor | 2 MΩ (*3) | RK73H1JTTD2004F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | | Resistor | 1.8 MΩ (*3) | RK73H1JTTD1804F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{L_FB5V} | Resistor | 1.2 MΩ (*3) | RK73H1JTTD1204F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | C _{FB5V} | Capacitor | 3 pF | CGA3E2C0G1H030C080AA | TDK | 1.6 × 0.8 × 0.8 | C0G, Rated voltage: 50 V _{DC} |
| | LL _{X5V} | Inductor | 1.5 μH | CLF6045NI-1R5N-D | TDK | 7.4 × 7.0 × 4.8 | DCR: 13 mΩ, I _{DC_MAX} : 4.5A |
| | C _{IN_5V} | Capacitor | 4.7 μF | CGA4J3X7R1C475K125AB | TDK | 2.0 × 1.2 × 1.25 | X7R, Rated voltage: 16 V _{DC} |
| CV _{OUT5V} | Capacitor | 47 μF × 5 | CGA9N3X7R1C476M230KB | TDK | 5.7 × 5.0 × 2.4 | X7R, Rated voltage: 16 V _{DC} | |
| HOT/ PG pins | R _{HOT} | Resistor | 100 kΩ | RK73H1JTTD1003F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{PG1V} | Resistor | 100 kΩ | RK73H1JTTD1003F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{PG3V} | Resistor | 100 kΩ | RK73H1JTTD1003F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |
| | R _{PG5V} | Resistor | 100 kΩ | RK73H1JTTD1003F | KOA | 1.6 × 0.8 × 0.45 | Rated power: 0.1W |

Capacitor: Ceramic capacitor, SBD: Schottky barrier diode

*1: V_{VOUT1V} setting ≈ 1.2V

*2: V_{VIN3V} setting ≈ 3.3V

*3: V_{VOUT5V} setting ≈ 5.0V

TDK: TDK Corporation

KOA: KOA Corporation

ON: ON Semiconductor Corporation

Note:

- The values of capacitors and resistors are subjects to consider according to a subsequent system. The values shown in the table are very dependable system whose current consumption varies dynamically from 0A to the full-load condition (maximum output current) in 10 μs.


10. Application Note

10.1 Setting the Operation Conditions

DD1V Output Voltage

The DD1V output voltage (V_{VOUT1V}) of this IC can be adjusted by changing the external resistors connecting the FB1V pin.

Figure 10-1 DD1V Output Voltage Setting

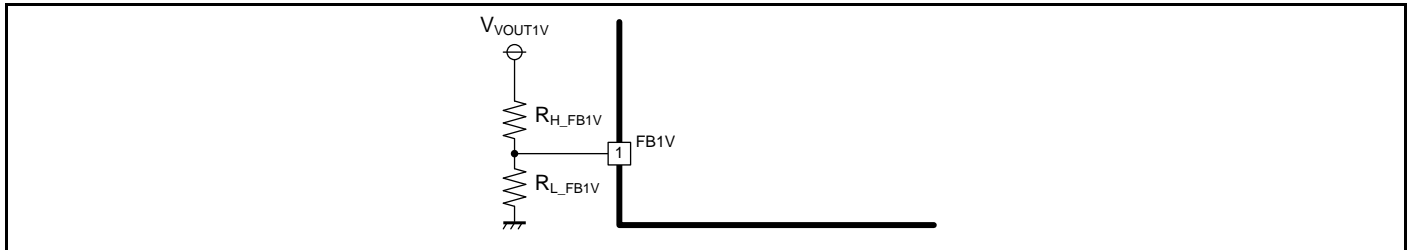


The DD1V output voltage (V_{VOUT1V}) can be calculated using the formula below.

$$V_{VOUT1V} [V] = \frac{R_{H_FB1V} + R_{L_FB1V}}{R_{L_FB1V}} \times V_{FB1V}$$

DD3V Output Voltage

The DD3V output voltage (V_{IN3V}) of this IC can be adjusted by changing the external resistors connecting the FB3V pin.

Figure 10-2 DD3V Output Voltage Setting

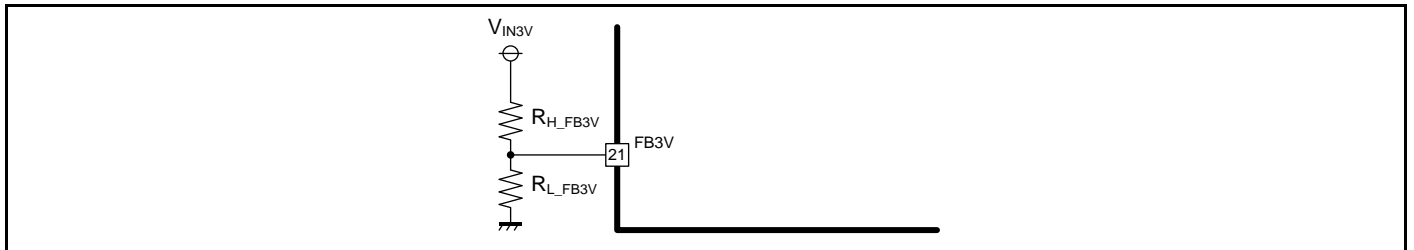


The DD3V output voltage (V_{IN3V}) can be calculated using the formula below.

$$V_{IN3V} [V] = \frac{R_{H_FB3V} + R_{L_FB3V}}{R_{L_FB3V}} \times V_{FB3V}$$

DD5V Output Voltage

The DD5V output voltage (V_{VOUT5V}) of this IC can be adjusted by changing the external resistors connecting the FB5V pin.

Figure 10-3 DD5V Output Voltage Setting

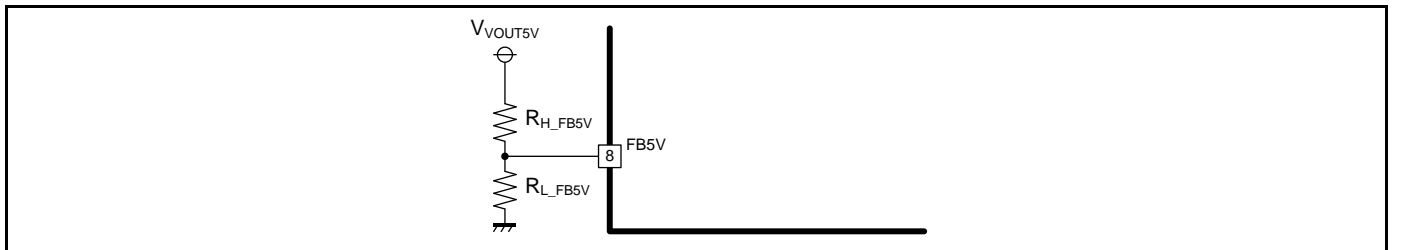

The DD5V output voltage (V_{VOUT5V}) can be calculated using the formula below.

$$V_{VOUT5V} [V] = \frac{R_{H_FB5V} + R_{L_FB5V}}{R_{L_FB5V}} \times V_{FB5V}$$


C_{BST3V} Capacitor

To drive the gate of the DD3V high-side FET (M_H), the bootstrap capacitor (C_{BST3V}) must have enough stored charge. The C_{BST3V} capacitor is set to satisfy conditions of the following formula to hold electric charge above the threshold voltage (V_{FET} [V]) of the high-side FET.

$$C_{BST3V} [F] \geq \frac{(6.79 \times 10^2 \times C_{OUT_3V}^2 - 0.595 \times C_{OUT_3V} + 280 \times 10^{-6}) \times C_{OUT_3V}}{(5 - V_{FET}) \times \left(0.1 \times 10^{-3} + I_{OUT_MIN5V} + \frac{V_{IN3V}}{R_{H_FB3V} + R_{L_FB3V}} \right) \times 10^3}$$

- C_{BST3V} [F] : Bootstrap capacitor
 - C_{OUT_3V} [F] : DD3V output capacitor
 - V_{FET} [V] : DD3V high-side FET threshold voltage
 - I_{OUT_MIN5V} [A] : DD5V output current
 - V_{IN3V} [V] : DD3V output voltage
 - R_{H_FB3V} [Ω] : DD3V high-side output voltage setting resistor
 - R_{L_FB3V} [Ω] : DD3V low-side output voltage setting resistor
- (See [Figure 9-1 Application Circuit Example](#) for more information)

Figure 10-4 C_{BST3V} setting (C_{BST3V} vs C_{OUT_3V})

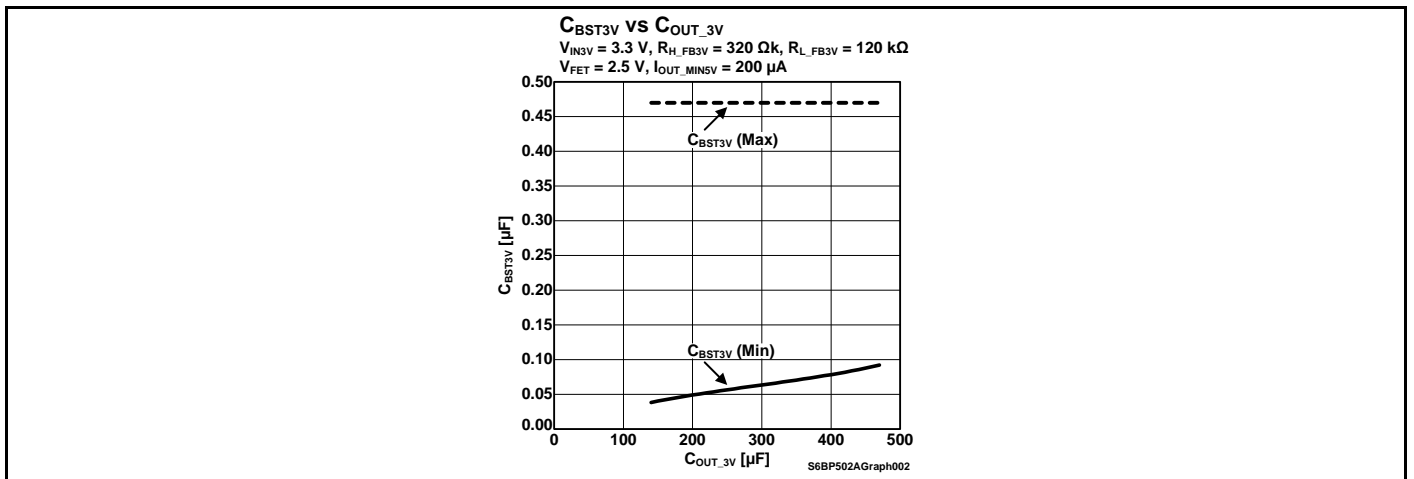


In addition, when the VIN voltage lowers down to the DD3V output voltage, the on-duty of the switching becomes 100% (D_{MAX_3V}) and the DD3V high-side FET keeps the turn-on state. The electric charge to the C_{BST3V} capacitor is not performed in the turn-on state, then the gate voltage of the high-side FET cannot be maintained. Confirm that the time period during which the VIN voltage drops (below +3.7 V) is less than the high-side FET on-duration time (T_{ONDT}). T_{ONDT} can be calculated using the formula below.

$$T_{ONDT} [s] \geq \left\{ 1.675 - 2 \times \ln \left(\frac{1.34 + V_{FET}}{3.45} \right) \right\} \times C_{BST3V} \times 10^6$$


- T_{ONDT} [s] : DD3V high-side FET On-duration time
- V_{FET} [V] : DD3V high-side FET threshold voltage
- C_{BST3V} [F] : Bootstrap capacitor

Figure 10-5 High-side FET On-duration Time vs C_{BST3V}

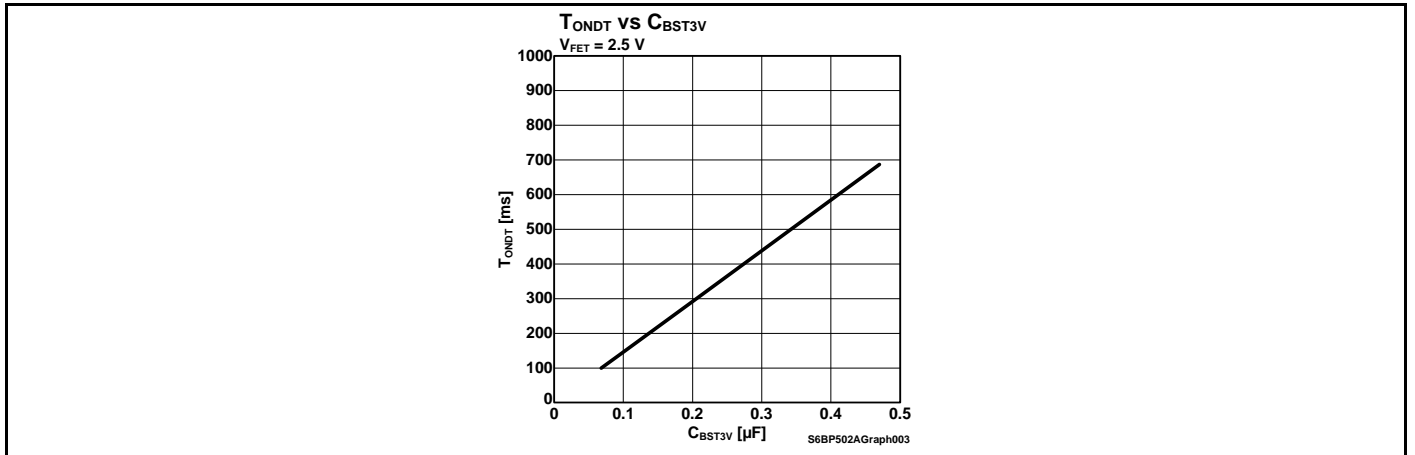


11. Reference Data

The following data are measured by an evaluation board mounting S6BP502A00SN2B000 under the conditions shown in "9. Application Circuit Example and Parts List". When measuring the efficiency, load regulation, line regulation and the temperature characteristics, the pull-up resistors, R_{PG1V} , R_{PG3V} , R_{PG5V} and R_{HOT} , are removed.

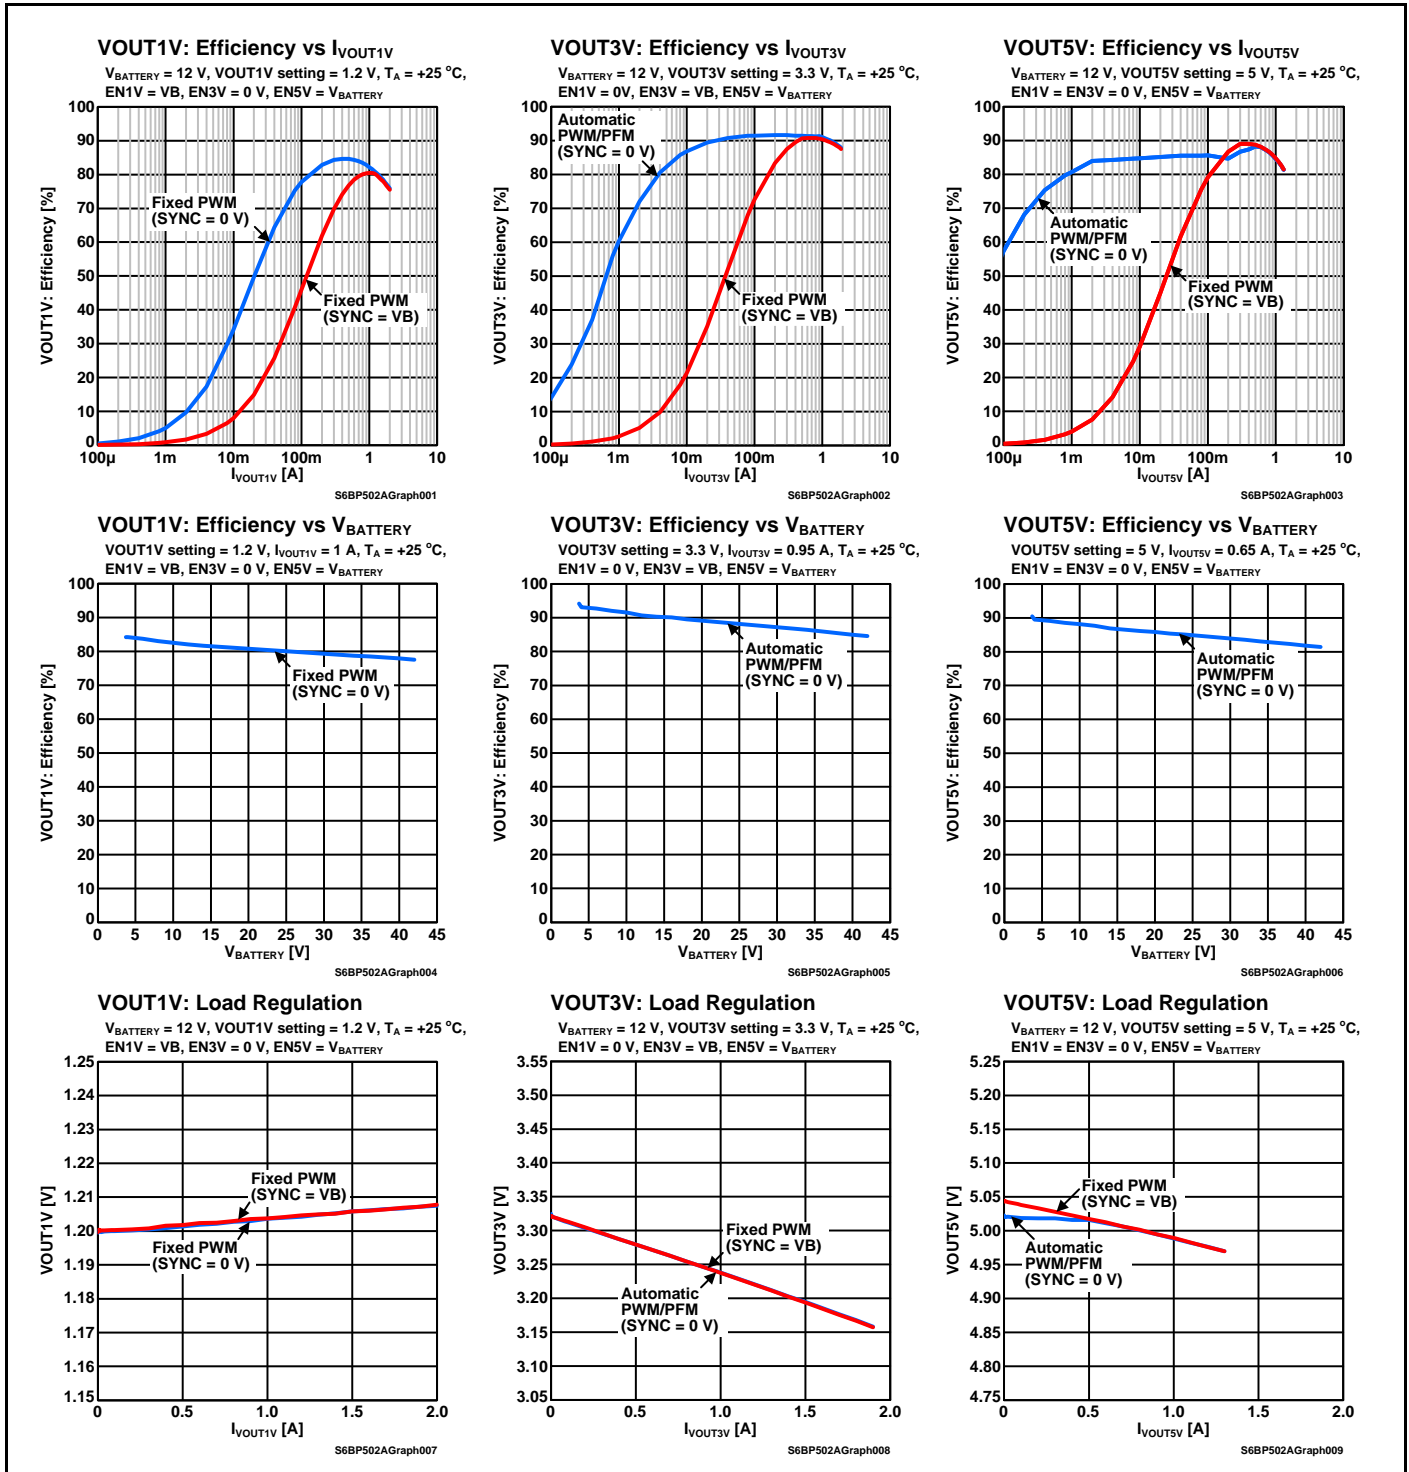

VOUT1V: Line Regulation


VOUT1V setting = 1.2 V, I_{VOUT1V} = 1 A, T_A = +25 °C,
EN1V = VB, EN3V = 0 V, EN5V = V_{BATTERY}

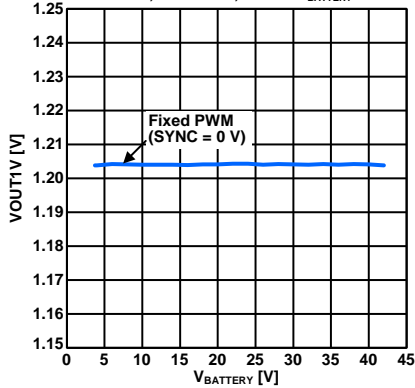

S6BP502AGraph010

VOUT3V: Line Regulation


VOUT3V setting = 3.3 V, I_{VOUT3V} = 0.95 A, T_A = +25 °C,
EN1V = 0 V, EN3V = VB, EN5V = V_{BATTERY}

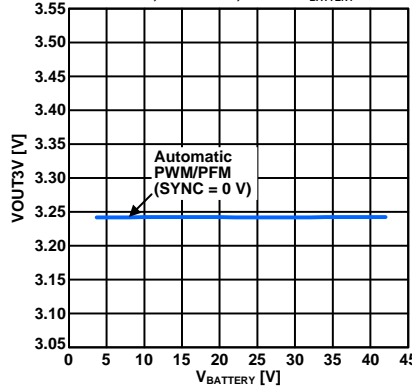

S6BP502AGraph011

VOUT5V: Line Regulation


VOUT5V setting = 5 V, I_{VOUT5V} = 0.65 A, T_A = +25 °C,
EN1V = EN3V = 0 V, EN5V = V_{BATTERY}

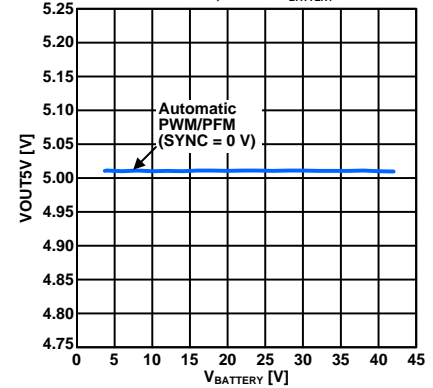

S6BP502AGraph012

VOUT1V vs Ambient Temperature


V_{BATTERY} = 12 V, VOUT1V setting = 1.2 V, I_{VOUT1V} = 1 A,
EN1V = VB, EN3V = 0 V, EN5V = V_{BATTERY}

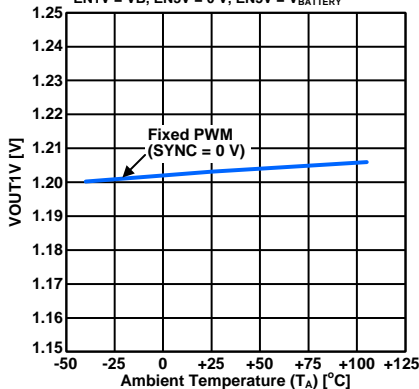

S6BP502AGraph013

VOUT3V vs Ambient Temperature


V_{BATTERY} = 12 V, VOUT3V setting = 3.3 V, I_{VOUT3V} = 0.95 A,
EN1V = 0 V, EN3V = VB, EN5V = V_{BATTERY}

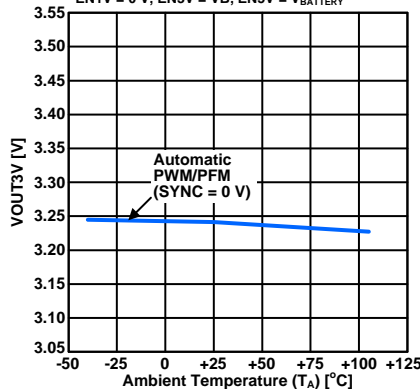

S6BP502AGraph014

VOUT5V vs Ambient Temperature


V_{BATTERY} = 12 V, VOUT5V setting = 5 V, I_{VOUT5V} = 0.65 A,
EN1V = EN3V = 0 V, EN5V = V_{BATTERY}

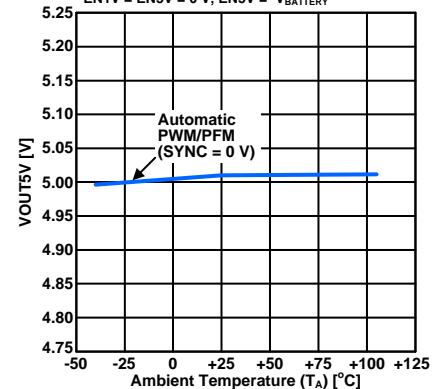

S6BP502AGraph015

VOUT1V: Turn On Response


V_{BATTERY} = 12 V, I_{VOUT1V} = I_{VOUT5V} = 0 A, T_A = +25 °C,
EN3V = 0 V, EN5V = V_{BATTERY},
SYNC = 0 V (DD1V: Fixed PWM)

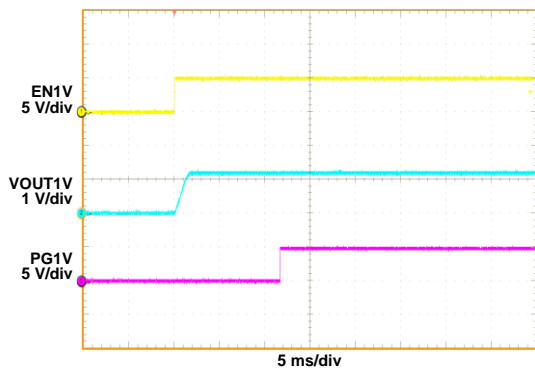

S6BP502AGraph016

VOUT1V: Turn Off Response


V_{BATTERY} = 12 V, I_{VOUT1V} = I_{VOUT5V} = 0 A, T_A = +25 °C,
EN3V = 0 V, EN5V = V_{BATTERY},
SYNC = 0 V (DD1V: Fixed PWM)

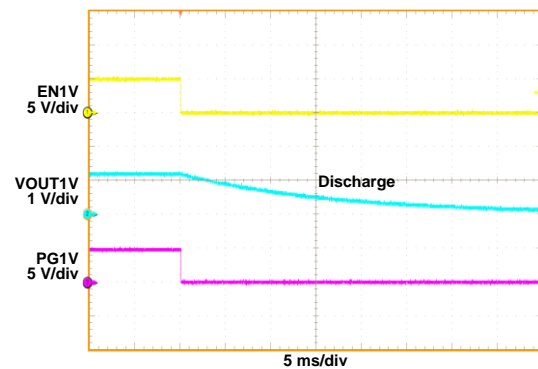

S6BP502AGraph017


VOUT3V: Turn On Response

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

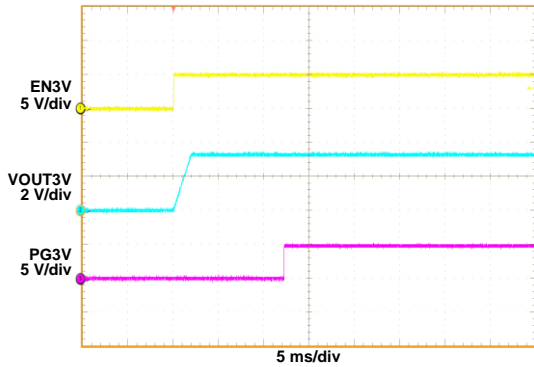


VOUT3V: Turn Off Response

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

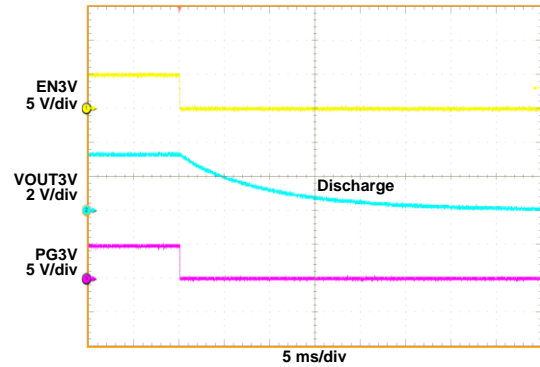


VOUT5V: Turn On Response

$I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

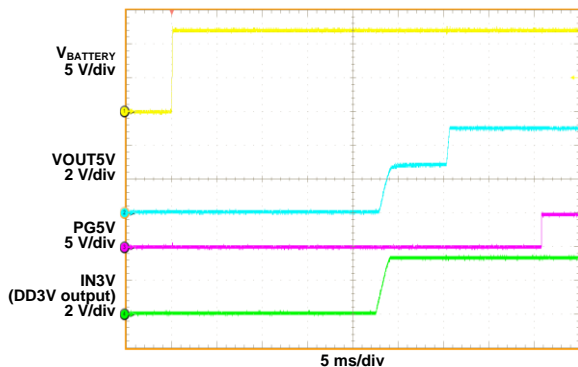


VOUT5V: Turn Off Response

$I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

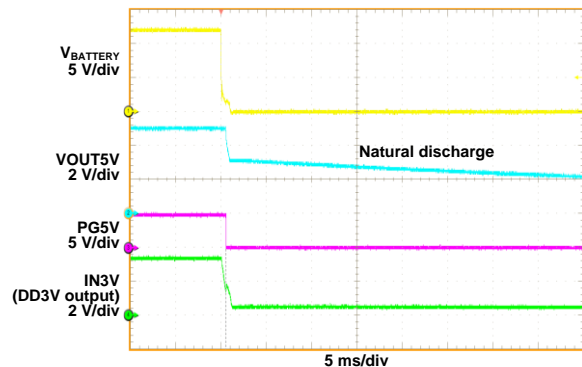


LX3V Output Spectrum vs Frequency

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = 1.9\text{ A}$, $I_{VOUT5V} = 0\text{ A}$,
 $EN1V = 0\text{ V}$, $EN3V = V_B$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM), RBW: 1 kHz, VBW: 100 kHz

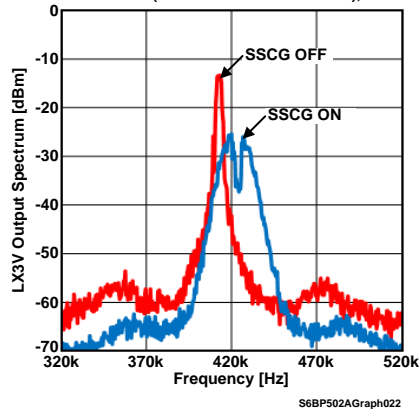


LX1V: Switching Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = 2\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = V_B$, $EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM)

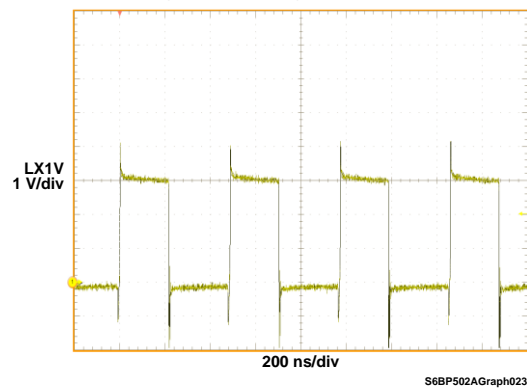


LX3V: Switching Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = 100\text{ mA}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = 0\text{ V}$, $EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

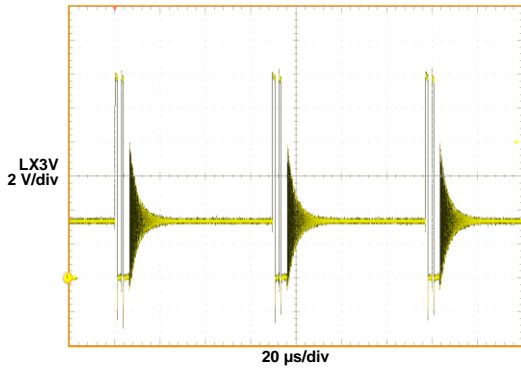


LX3V: Switching Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = 1.3\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = 0\text{ V}$, $EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

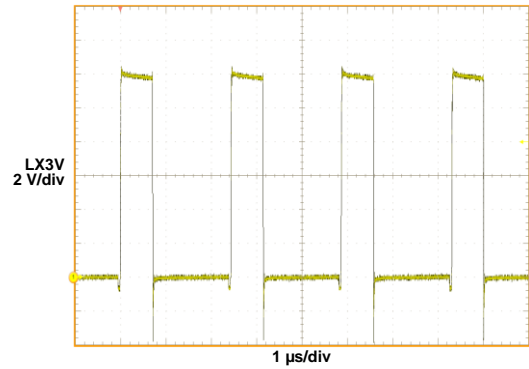


LX5V: Switching Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT5V} = 50\text{ mA}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

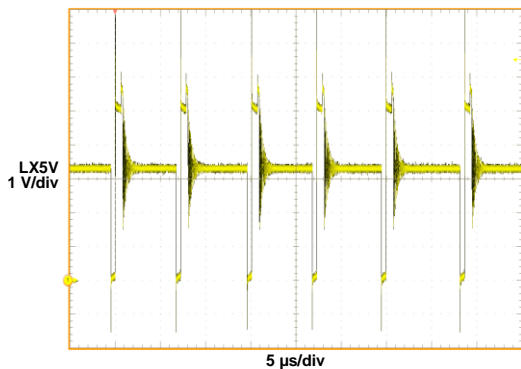


LX5V: Switching Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT5V} = 1.3\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

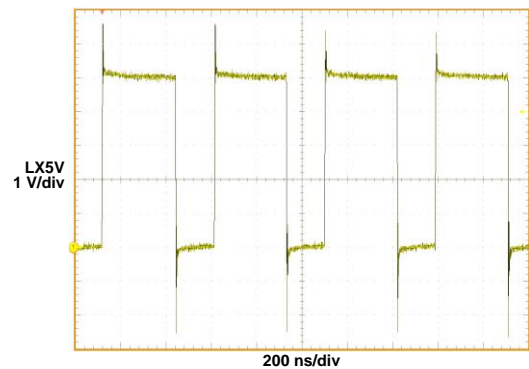


VOUT1V: Ripple Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = 2\text{ A}$, $I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM)

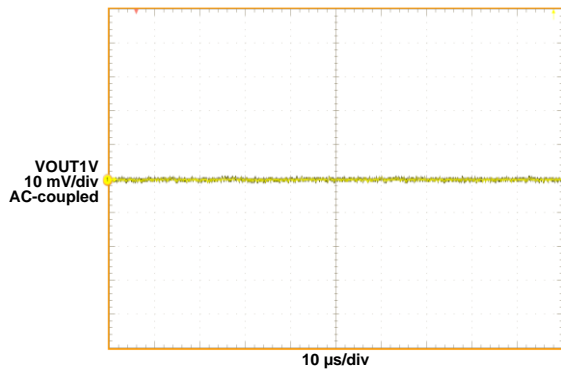


VOUT3V: Ripple Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = 0\text{ A}$, $I_{VOUT3V} = 1.9\text{ A}$, $I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

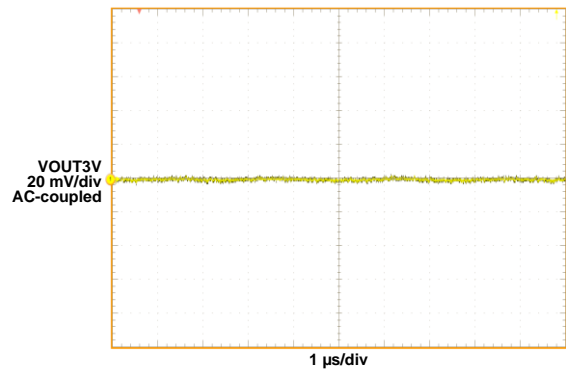


VOUT5V: Ripple Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = I_{VOUT3V} = 0\text{ A}$, $I_{VOUT5V} = 1.3\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

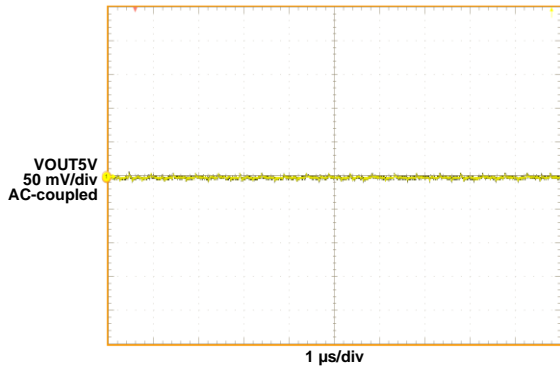


VOUT1V, VOUT3V, VOUT5V: Ripple Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM, DD3V & DD5V: Automatic PWM/PFM)

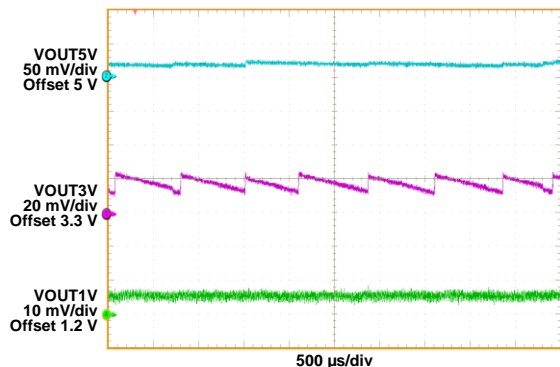


VOUT1V, VOUT3V, VOUT5V: Ripple Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = VB$ (DD1V & DD3V & DD5V: Fixed PWM)

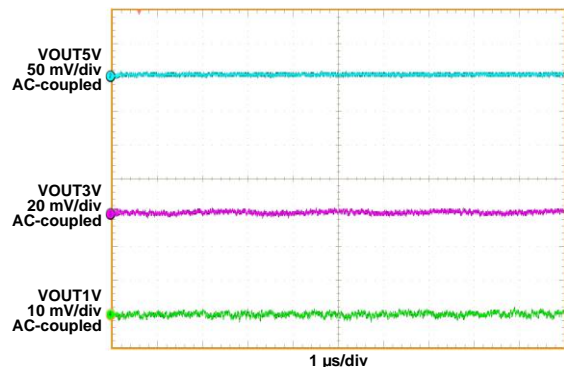


VOUT1V: Load Transient Response

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM)

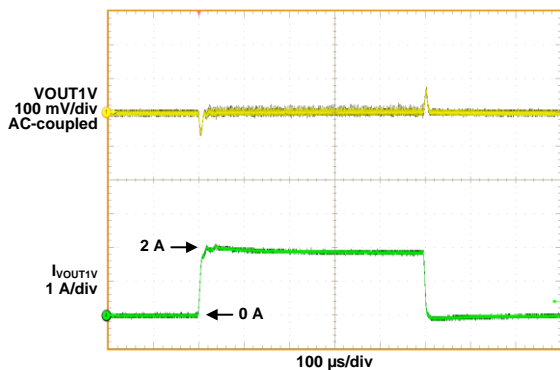


VOUT3V: Load Transient Response

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

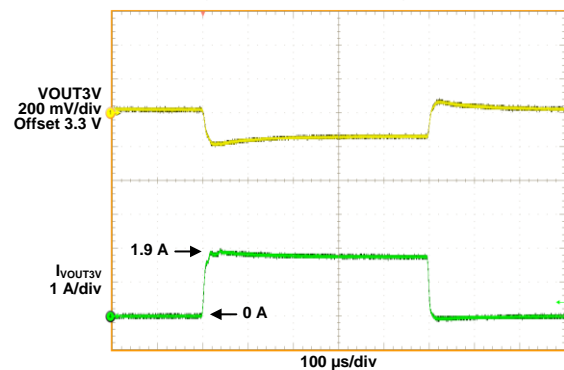


VOUT5V: Load Transient Response

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = I_{VOUT3V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

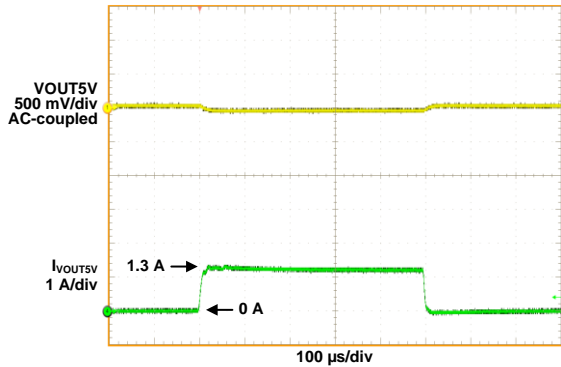


VOUT1V, VOUT3V, VOUT5V: Line Transient Response

$I_{VOUT1V} = 1\text{ A}$, $I_{VOUT3V} = 0.95\text{ A}$, $I_{VOUT5V} = 0.65\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM, DD3V & DD5V: Automatic PWM/PFM)

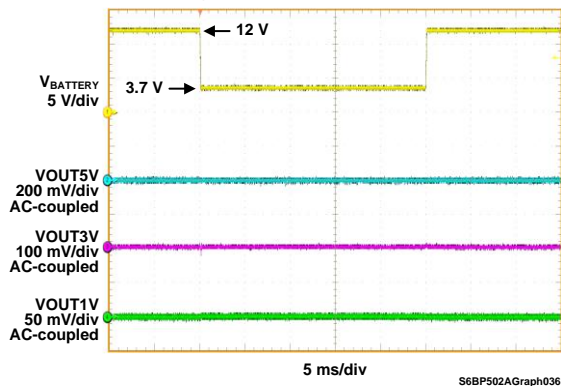


VOUT1V, VOUT3V, VOUT5V: Line Transient Response

$I_{VOUT1V} = 1\text{ A}$, $I_{VOUT3V} = 0.95\text{ A}$, $I_{VOUT5V} = 0.65\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM, DD3V & DD5V: Automatic PWM/PFM)

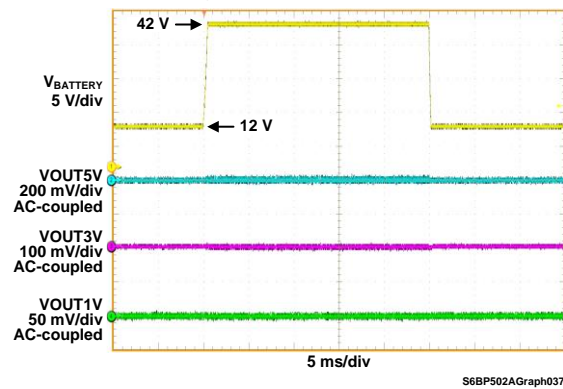


DD1V: Over Current Protection Waveform

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = VB$, $EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM)

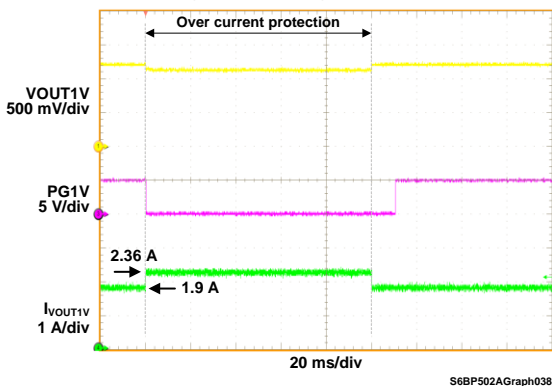


DD1V: Gain, Phase Characteristics

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT1V} = 2\text{ A}$, $I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = VB$, $EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD1V: Fixed PWM)

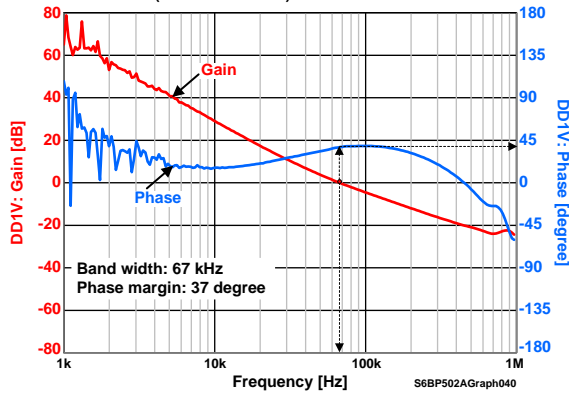


DD3V: Gain, Phase Characteristics

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT3V} = 1.9\text{ A}$, $I_{VOUT5V} = 0\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = 0\text{ V}$, $EN3V = VB$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD3V: Automatic PWM/PFM)

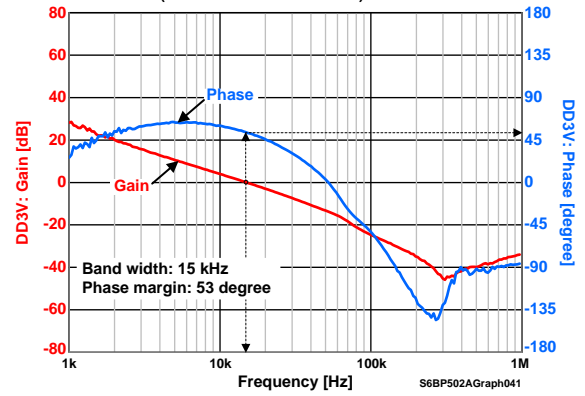

DD5V: Gain, Phase Characteristics

$V_{BATTERY} = 12\text{ V}$, $I_{VOUT5V} = 1.3\text{ A}$, $T_A = +25\text{ }^\circ\text{C}$,
 $EN1V = EN3V = 0\text{ V}$, $EN5V = V_{BATTERY}$,
 $SYNC = 0\text{ V}$ (DD5V: Automatic PWM/PFM)

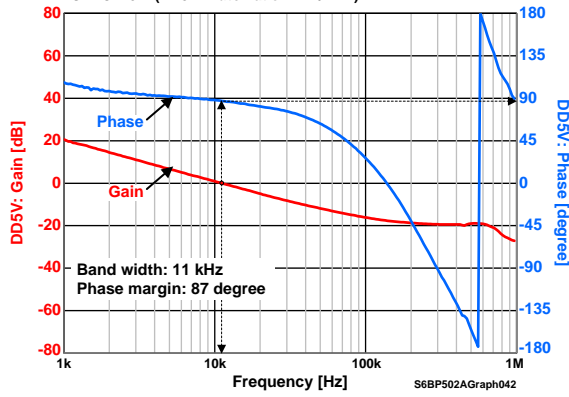

12. Usage Precaution

Printed circuit board ground lines should be set up with consideration for common impedance.

Take appropriate measures against static electricity.

- Containers for semiconductor materials should have anti-static protection or be made of conductive material.
- After mounting, printed circuit boards should be stored and shipped in conductive bags or containers.
- Work platforms, tools, and instruments should be properly grounded.
- Working personnel should be grounded with resistance of 250 kΩ to 1 MΩ in serial body and ground.

Do not apply negative voltages.

The use of negative voltages below -0.3 V may make the parasitic transistor activated to the LSI, and can cause malfunctions.

13. RoHS Compliance Information


This product has observed the standard of lead, cadmium, mercury, Hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE).

14. Ordering Information


| Part Number (MPN) | Package |
|-------------------|--|
| S6BP501A00SN2B000 | Plastic, Wettable QFN (0.50 mm pitch), 32-pin (VNG032) |
| S6BP502A00SN2B000 | |

MPN: Marketing Part Number

Figure 14-1 Ordering Part Number Definitions

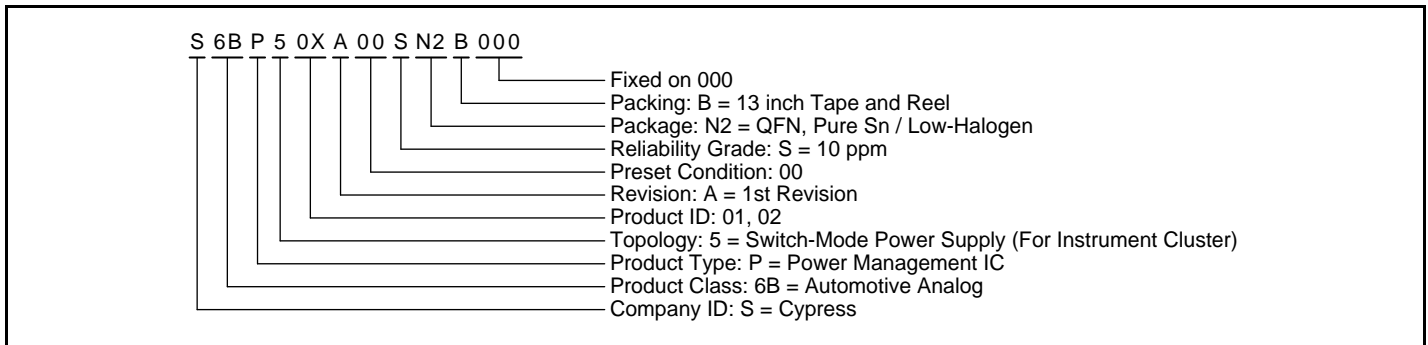

15. Package Dimensions

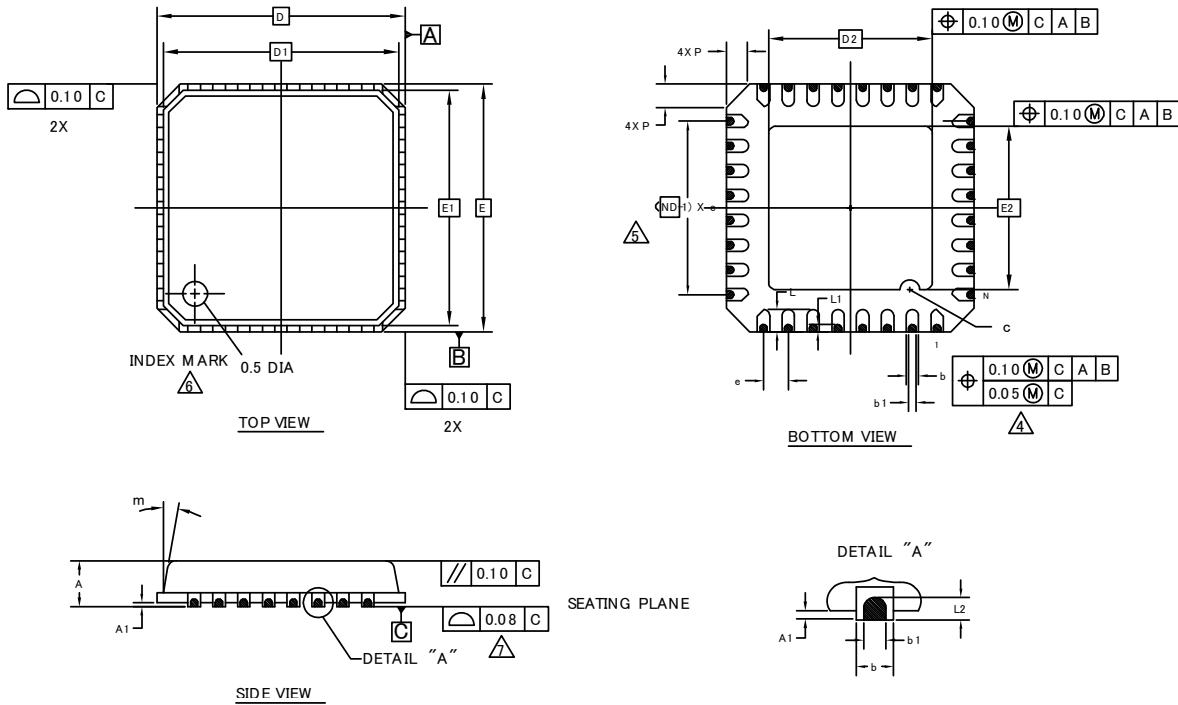

| SYMBOL | DIMENSIONS | | | NOTE |
|--------|------------|------|------|------------------|
| | MIN. | NOM. | MAX. | |
| A | — | — | 0.90 | PROFILE |
| A1 | 0.00 | — | 0.05 | |
| [D] | 5.00 BSC | | | |
| [E] | 5.00 BSC | | | |
| [D1] | 4.75 BSC | | | |
| [E1] | 4.75 BSC | | | |
| b | 0.18 | 0.25 | 0.30 | TERMINAL WIDTH |
| b1 | 0.10 | 0.15 | 0.20 | DIMPLE WIDTH |
| [D2] | 3.30 BSC | | | EXPOSED PAD SIZE |
| [E2] | 3.30 BSC | | | EXPOSED PAD SIZE |
| e | 0.50 BSC | | | TERMINAL PITCH |
| L | 0.35 | 0.45 | 0.55 | TERMINAL LENGTH |
| L1 | 0.05 | 0.15 | 0.25 | DIMPLE LENGTH |
| L2 | 0.09 REF | | | DIMPLE HEIGHT |
| c | R0.20 | | | PIN #1 ID |
| m | 0 | — | 12° | |
| P | — | — | 0.60 | |
| N | 32 | | | TERMINAL COUNT |

NOTES

- ALL DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONING AND TOLERANCING CONFORMS TO ASME Y14.5-1994.
- N IS THE TOTAL NUMBER OF TERMINALS.
- △ DIMENSION "b" APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30mm FROM TERMINAL TIP. IF THE TERMINAL HAS THE OPTIONAL RADIUS ON THE OTHER END OF THE TERMINAL THE DIMENSION "b" SHOULD NOT BE MEASURED IN THAT RADIUS AREA.
- △ND REFER TO THE NUMBER OF TERMINALS ON D OR E SIDE.
- △PIN #1 ID ON TOP WILL BE LOCATED WITHIN INDICATED ZONE.
- △UNILATERAL COPLANARITY ZONE APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.

002-13490 Rev. **

PACKAGE OUTLINE, 32 LEAD WQFN
5.0X5.0X0.9 MM VNG032 3.3X3.3 MM EPAD (SAWN) REV**

Document History

Document Title: S6BP501A, S6BP502A 3ch DC/DC Converter IC for Automotive Cluster
 Document Number: 002-03396

| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
|----------|---------|-----------------|-----------------|--|
| ** | 4921966 | HIXT | 09/16/2015 | New Spec. |
| *A | 4998578 | HIXT | 11/02/2015 | Added Errata. |
| *B | 5107300 | HIXT | 01/26/2016 | <p>Updated the description for the pin name, IN3V in the Table 3-1. Updated the following Electrical Characteristics.</p> <ul style="list-style-type: none"> I_{LEAK_1V}: Condition I_{LXPEAK_1V}: Min values t_{SS_3V}: Typ value R_{ONH_3V}: Typ value R_{ON_BSTSW}: Typ and Max values I_{R_BSTSW}: Condition and Max value I_{LOAD_SW3V}: Min values I_{LEAK_SW3V}: Condition t_{SS_SW3V}: Typ value I_{PWMPFM_5V}: Typ value I_{LEAK_5V}: Condition I_{LX_PEA5V}: Typ value V_{OVD_PG1V}: Typ value SSCG block (Modulation range): Typ value <p>Updated the description and the Table 8-2 of the SYNC in the Section 8.2. Added the remarks for the DD5V output in the Table 8-3. Updated the following parts in the Table 9-1..</p> <ul style="list-style-type: none"> C_{VDD}: value, part number and remarks R_{H_FB3V}: value and part number R_{L_FB3V}: value and part number R_S: value <p>Added "Development Support" Updated Errata.</p> |
| *C | 5198555 | HIXT | 05/16/2016 | <p>Added "AEC-Q100 compliant (Grade-2)" in Features. Updated Architecture Block Diagram. Deleted Errata item1, item2, item4, and item5 from Errata. Errata item3 in Errata is under confirmation with Rev.2 silicon.</p> |
| *D | 5325274 | HIXT | 09/09/2016 | <p>Added Block Diagram Added More Information Updated the values in Electrical Characteristics</p> <ul style="list-style-type: none"> DD3V block: Boost switch R_{ONH_3V}: Condition (DRVH3V pin current = 50 mA → 10 mA), Typ value (8.5Ω → 15Ω) R_{ON_BSTSW}: Typ value (3Ω → 8Ω), Max value (10Ω → 24Ω) I_{R_BSTSW}: Max value (3 μA → 2 μA) <p>Deleted "Development Support" Added Figure 14-1 Ordering Part Number Definitions Deleted Errata</p> |

| Revision | ECN | Orig. of Change | Submission Date | Description of Change |
|----------|---------|-----------------|-----------------|--|
| *E | 5522611 | HIXT | 11/18/2016 | <p>Updated the values in Electrical Characteristics</p> <p>Supply current: I_{SHDN}: Added Max value (2 μA) I_{VB}: Added Max value (25 mA)</p> <p>DD1V block: R_{ONH_1V}: Added Max value (260 mΩ) R_{ONL_1V}: Added Max value (200 mΩ) R_{DIS_1V}: Added Min value (280Ω), Added Max value (520Ω) t_{SS_1V}: Added Min value (0.5 ms), Added Max value (2 ms)</p> <p>DD3V block: t_{SS_3V}: Added Min value (0.5 ms), Added Max value (2 ms) R_{ONH_3V}: Added Max value (30 Ω) R_{ONL_3V}: Added Max value (3 Ω) R_{ONH_3V}: Added Max value (4 Ω) R_{ONL_3V}: Added Max value (2 Ω) R_{DIS_SW3V}: Added Min value (280Ω), Added Max value (520Ω) t_{SS_SW3V}: Added Min value (1 ms), Added Max value (4 ms)</p> <p>DD5V block: R_{ONH_5V}: Added Max value (260 mΩ) R_{ONL_5V}: Added Max value (200 mΩ) t_{SS_5V}: Added Min value (0.2 ms), Added Max value (1 ms)</p> <p>EN1V pin: I_{ON_EN1V}: Added Max value (100 μA) EN3V pin: I_{ON_EN3V}: Added Max value (100 μA) EN5V pin: I_{OFF_EN5V}: Added Max value (1 μA) SYNC Pin / SYNC block: I_{IN_SYNC}: Added Max value (100 μA) SSCG block: Modulation range: Added Min value (3 %), Added Max value (9%) F_{MOD}: Added comments in condition. Added Min value (3 kHz), Added Max value (5 kHz)</p> <p>Updated Figure 8-1 Turn On and Turn Off Sequence Added a comment "Start-up initialization is complete".</p> |
| *F | 5626998 | HIXT | 02/13/2017 | <p>Changed the values in Electrical Characteristics</p> <p>OSC block: Switching frequency F_{OSC1}: Changed Min value (2.0 MHz \rightarrow 1.9 MHz) Changed Max value (2.2 MHz \rightarrow 2.3 MHz) F_{OSC2}: Changed Min value (0.40 MHz \rightarrow 0.38 MHz) Changed Max value (0.44 MHz \rightarrow 0.46 MHz)</p> <p>Added the setting of C_{BST3V} Capacitor in Application Note</p> |
| *G | 5764719 | HIXT | 06/20/2017 | <p>Updated Block Diagram Corrected a typo (FET symbol of the load switch): "NMOS" \rightarrow "PMOS"</p> <p>Updated Architecture Block Diagram Corrected a typo (FET symbol of the load switch): "NMOS" \rightarrow "PMOS"</p> <p>Updated Absolute Maximum Ratings Corrected a typo (Symbol of "DRVL3V to PGND3V" at the difference voltage): "V_{DRVH3V_LX3V}" \rightarrow "V_{DRVL3V_PGND3V}"</p> <p>Updated the conditions in Electrical Characteristics DD1V block, V_{OVPF_1V}: Added "Monitoring V_{LX1V} falling" DD3V block, V_{OVPR_3V}: Changed "Monitoring V_{VOUT3V} rising" \rightarrow "Monitoring V_{CSN} rising" DD3V block, V_{OVPF_3V}: Added "Monitoring V_{IN3V} falling" DD3V block, R_{ONL_3V}: Corrected a typo ("PLX3V to DRVL3V") \rightarrow "(LX3V to DRVL3V)" DD5V block, V_{OVPF_5V}: Added "Monitoring V_{VOUT5V} falling" PG1V pin, I_{LEAK_PG1V}: Corrected a typo "$V_{PG5V} = 5.0$ V" \rightarrow "$V_{PG1V} = 5.0$ V" PG1V pin, V_{LOW_PG1V}: Corrected a typo "$I_{PG5V} = 3$ mA" \rightarrow "$I_{PG1V} = 3$ mA"</p> <p>Added Figure 3-1 I/O Pin Equivalent Circuit Diagram Added Reference Data Deleted the part number of the engineering part number from Ordering Information</p> |
| *H | 6283945 | ATTS | 08/17/2018 | No update due to sunset review |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

| | |
|-------------------------------|--|
| Arm® Cortex® Microcontrollers | cypress.com/arm |
| Automotive | cypress.com/automotive |
| Clocks & Buffers | cypress.com/clocks |
| Interface | cypress.com/interface |
| Internet of Things | cypress.com/iot |
| Memory | cypress.com/memory |
| Microcontrollers | cypress.com/mcu |
| PSoC | cypress.com/psoc |
| Power Management ICs | cypress.com/pmic |
| Touch Sensing | cypress.com/touch |
| USB Controllers | cypress.com/usb |
| Wireless Connectivity | cypress.com/wireless |

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6 MCU](#)

Cypress Developer Community

[Community](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

Arm and Cortex are registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

© Cypress Semiconductor Corporation, 2015-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.