


# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

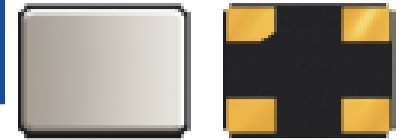

3.2 x 2.5 x 0.75mm

RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM8W SERIES

### FEATURES

- Optimized for energy saving wearables, and IoT applications
- Low 50  $\Omega$  ESR at 30.0000 to 54.0000MHz
- 0.75 mm max height ideally suited for height constrained designs
- Seam sealed for longterm reliability


### APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

### STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10.0000		54.0000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	$^{\circ}\text{C}$	See options
Storage Temperature	-55		+125	$^{\circ}\text{C}$	
Frequency Tolerance @ +25 $^{\circ}\text{C}$	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature ( ref. to +25 $^{\circ}\text{C}$ )	-10		+10	ppm	See options
Equivalent series resistance (R1)			150	$\Omega$	10.0000 - 11.9999MHz
			100		12.0000 - 29.9999MHz
			50		30.0000 - 54.0000MHz
Shunt capacitance (C0)		< 1.2	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	$\mu\text{W}$	
Aging (1 year)	-2		+2	ppm	@ 25 $^{\circ}\text{C} \pm 3^{\circ}\text{C}$
Insulation Resistance	500			M $\Omega$	@ 100Vdc $\pm$ 15V

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

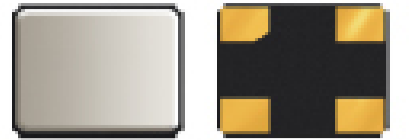

3.2 x 2.5 x 0.75mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM8W SERIES

### OPTIONS AND PART IDENTIFICATION (NOTE 1)

Note 1: Contact Abracon for part number requests with carrier frequency callouts up to 5&6 digit accuracy after the decimal.

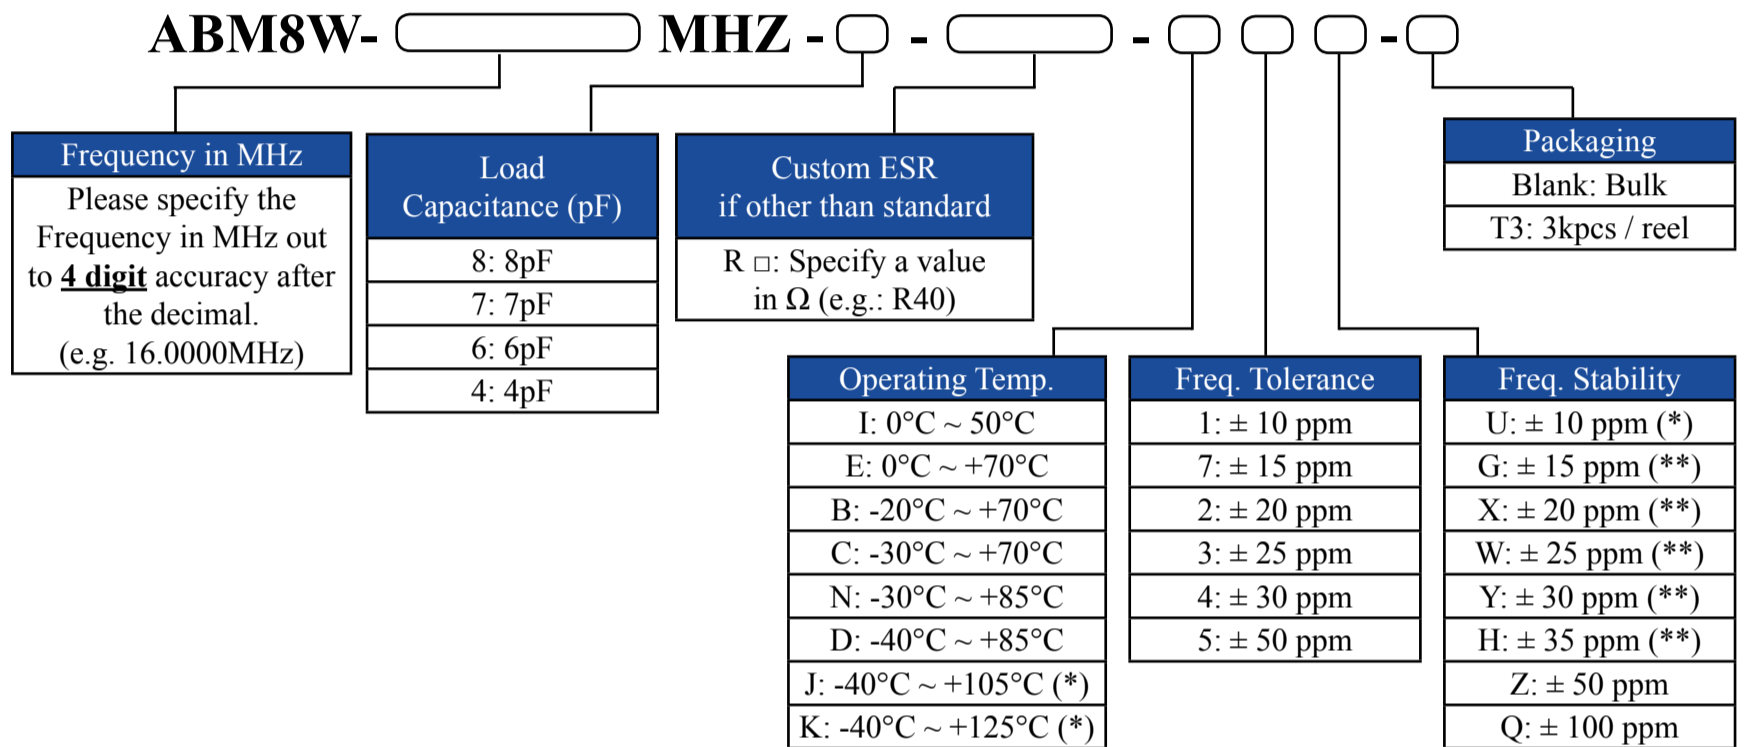

(\*) Only offered @ Freq. Stability options: Z & Q.


Contact ABRACON for tighter Frequency Stability.

(\*) Only offered @ Operating Temp. Range options: I, E, & B

(\*\*) Only offered @ Operating Temp. Range options: I, E, B, C, N, & D

Contact ABRACON for wider Operating Temp. Range.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

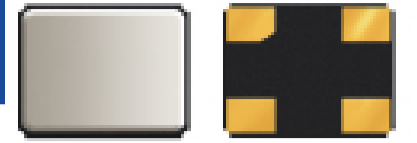



ABM8W SERIES

3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## TYPICAL ESR (EQUIVALENT SERIES RESISTANCE) Vs. TEMPERATURE CHARACTERISTICS

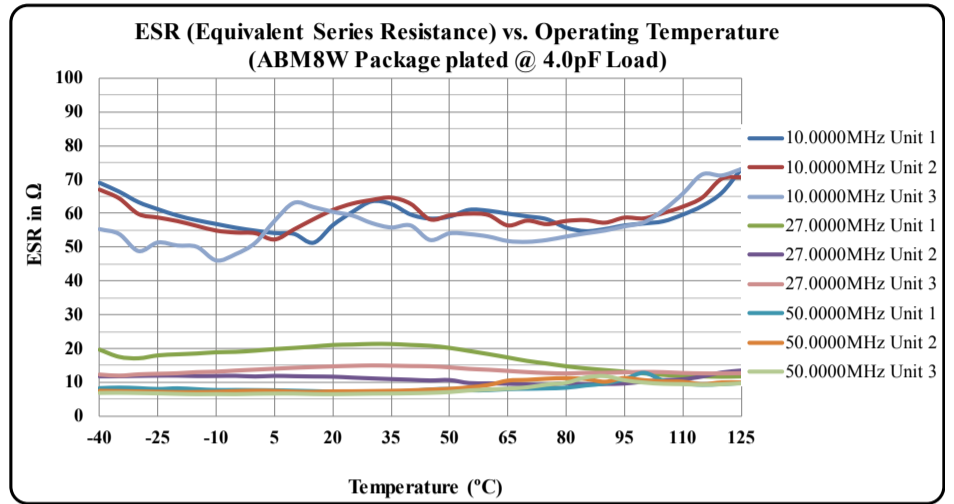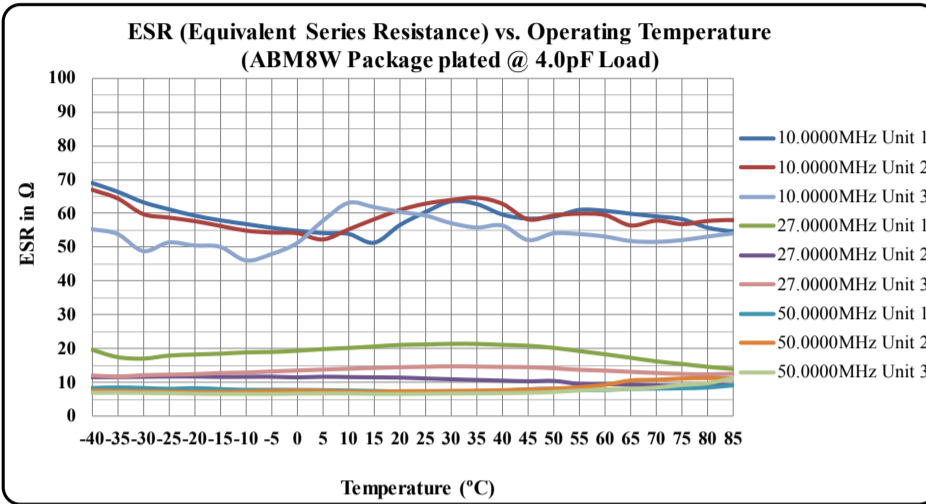

## TYPICAL FREQUENCY Vs. TEMPERATURE CHARACTERISTICS

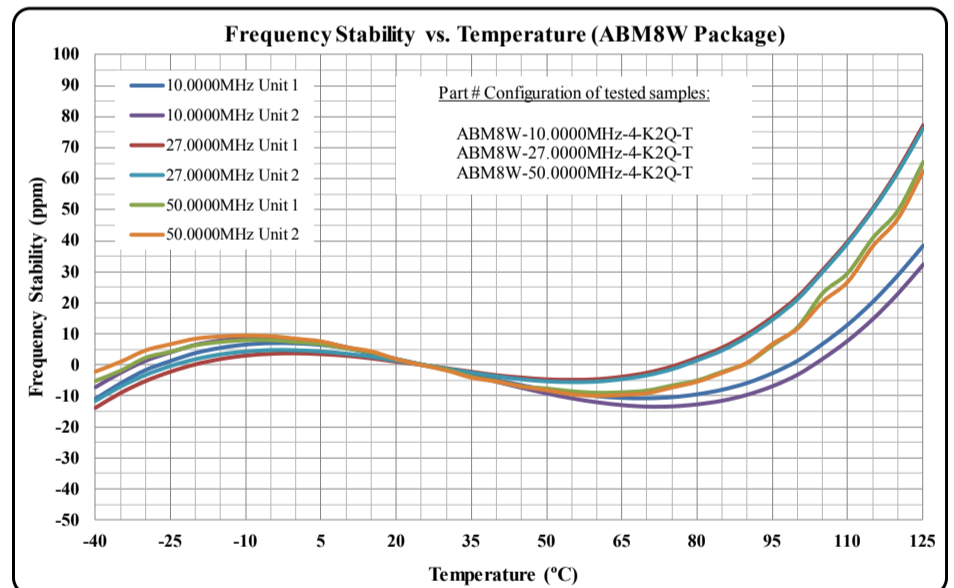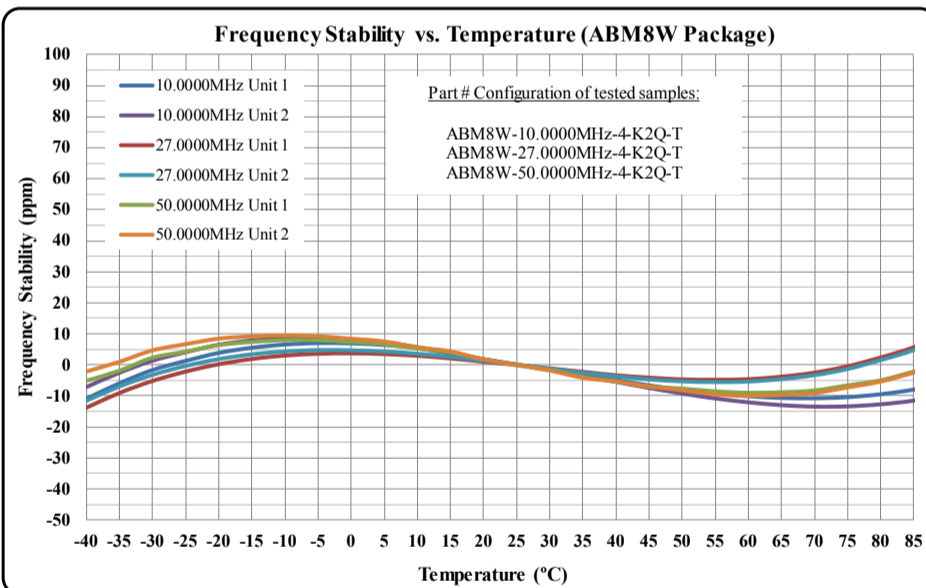

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

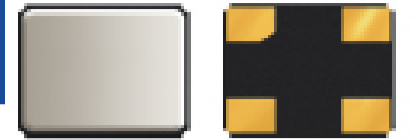

ABM8W SERIES


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## TYPICAL FREQUENCY TOLERANCE DISTRIBUTION (AT 25°C ± 3°C)

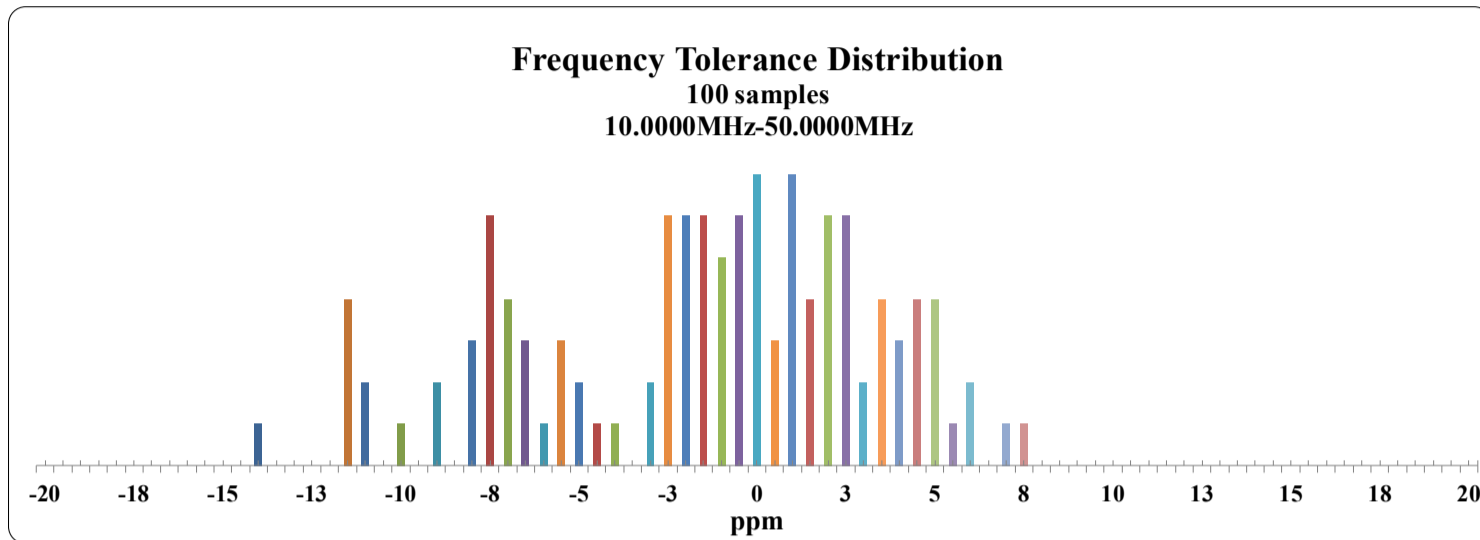

## TYPICAL ESR DISTRIBUTION (AT 25°C ± 3°C)


### ESR Distribution @ 10.0000MHz

100 samples  
MAX ESR = 77.7 Ω

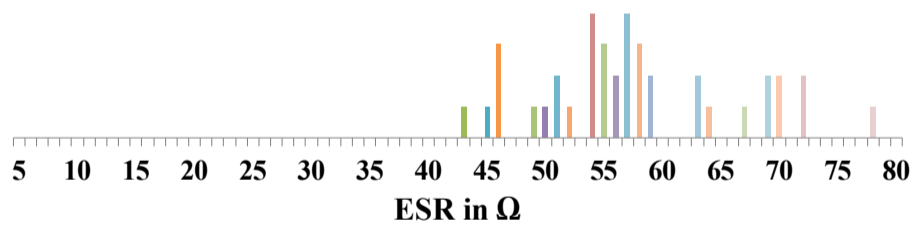


### ESR Distribution @ 27.0000MHz

100 samples  
MAX ESR = 21.6 Ω

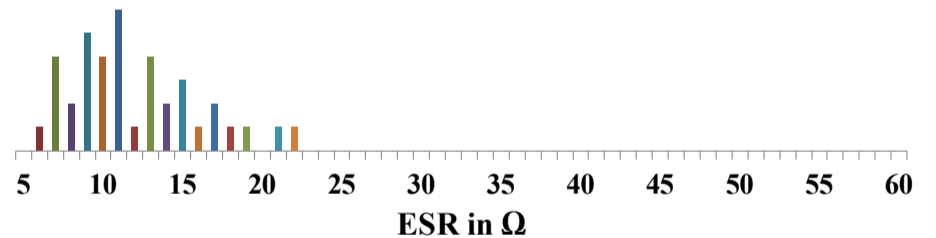


### ESR Distribution @ 50.0000MHz

100 samples  
MAX ESR = 10.23 Ω

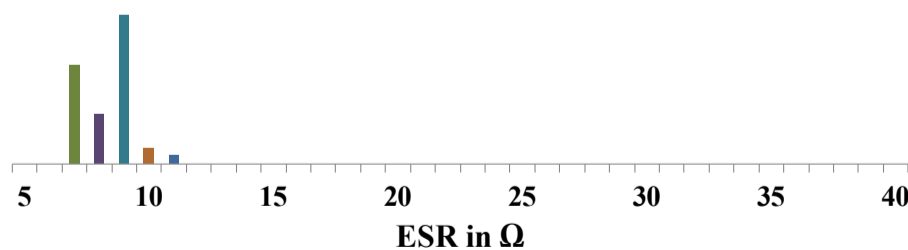

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

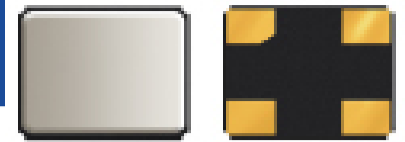

ABM8W SERIES


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant


MSL = N/A: NOT APPLICABLE

## SPICE MODELS (BASED ON TYPICAL VALUES AT 25°C ± 3°C)

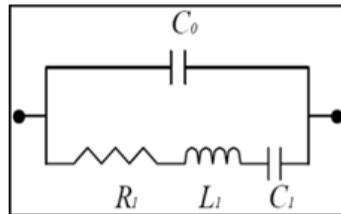

<b>Frequency: 10.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 10.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.88 pF	C0	=	0.86 pF
R1	=	53.82 Ω	R1	=	60.62 Ω
L1	=	162.02 mH	L1	=	164.96 mH
C1	=	1.56 fF	C1	=	1.54 fF
<b>Frequency: 27.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 27.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	1.16 pF	C0	=	1.16 pF
R1	=	11.83 Ω	R1	=	11.06 Ω
L1	=	9.16 mH	L1	=	9.10 mH
C1	=	3.80 fF	C1	=	3.82 fF
<b>Frequency: 50.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 50.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	1.16 pF	C0	=	1.15 pF
R1	=	7.61 Ω	R1	=	8.06 Ω
L1	=	2.45 mH	L1	=	2.49 mH
C1	=	4.14 fF	C1	=	4.07 fF

## MECHANICAL DIMENSIONS

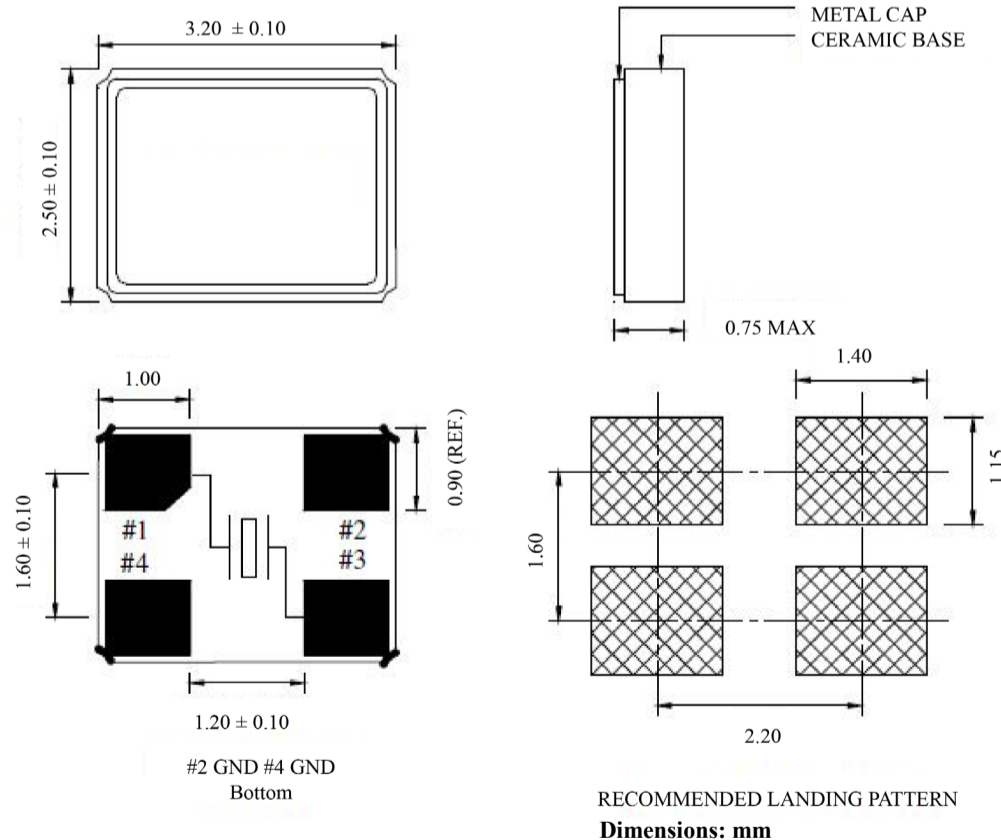

### Note:

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

