

EMC-Power Line Filters for 1-Phase Systems

FMBB Series, 2-stage all-purpose filters to Protection Class I, with high symmetrical and asymmetrical insertion loss and low leakage current, conform to EN 133200, UL 1283 and IEC 60950

Nominal current: 8 – 25 A @ 40 °C
 Rated voltage U_R (U_{max}): 125/250 VAC 50/60 Hz
 Attenuation: Excellent
 Leakage current: for Standard and Industrial applications
 Test voltages: L/N → E 2.7 kVDC, 2 sec
 L → N 1.7 kVDC, 2 sec *
 Climatic category: 25/100/21 acc. to IEC 60068-1
 50% saturation typ.: 2 to 3 x I @ 20 °C
 Inrush current: 1.5 x I min. per hour
 MTBF @ 40 °C / U_R (U_{max}): > 200'000 h acc. To MIL-HB-217 F
 * without resistor

Approvals:



The SCHURTER high current filter family FMBB was specially developed for the following industrial applications:

- Frequency Converters
- Stepper Motor Drives
- UPS-Systems
- Inverters

International approvals centers (i.e. UL) today demand high filter performance with regard to attenuation and loading characteristics. During the design, special considerations were made for applications that require high attenuation at the specified maximum load or where asymmetrical loading of the filter occur independently from line impedance at the installation site. The implemented filter range wholly conforms to the requirements of the international standards EN 133200, UL 1283, IEC 60950 and VDE 0565.

The filter series are ideally suited for applications with EN 55011, EN 55014 and EN 55022 requirements.

Order Numbers and Technical Data


Type FMBB	I_N (1) @ ϑ_a 40 °C [A]	U_R (U_{max}) [VAC]	L_N (2) -30%/+50% [mH]	Resistance L-L' ± 15% [mΩ]	Power dissipation total ± 15% [W]	Leakage current (3) @ 250 V / 50 Hz [mA]	C1 (X2) ± 20% [μF]	C2 (X2) ± 20% [μF]	C3 (X2) ± 20% [μF]	C4 (Y2) ± 20% [nF]	C5 (Y2) ± 20% [nF]	R1 [MΩ]	R2 [MΩ]	Circuit diagram	Case	Terminal blocks [mm ²]
5500.2068	8	250	2 x 7	25	3.25	< 0.25	0.1	0.15	0.47	2.2	-	1	-	S1	16-2	4
5500.2069	12	250	2 x 5	13.4	3.86	< 3.5	2.2	2.2	2.2	33	2.2	1	-	S2	24-2	4
5500.2070	16	250	2 x 3.5	10.4	5.32	< 3.5	2.2	2.2	2.2	33	2.2	1	1	S2	31-2	4
5500.2071	25	250	2 x 3.5	7.4	9.25	< 3.5	2.2	2.2	2.2	33	2.2	1	1	S2	31-6	6

(1) Current derating over 40°C : $I = I_N \times \sqrt{(100-\vartheta_a)/60}$


(2) Nominal inductance measured according to EN 138100, see introduction of this catalog, paragraph 3.4

(3) Measured according to IEC 60950 5.2.3 Annex D, see introduction of this catalog, paragraph 3.5


S1 Circuit diagram

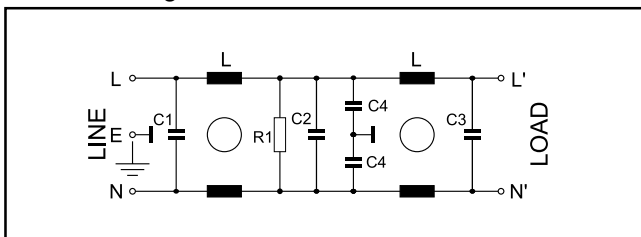

S2 Circuit diagram

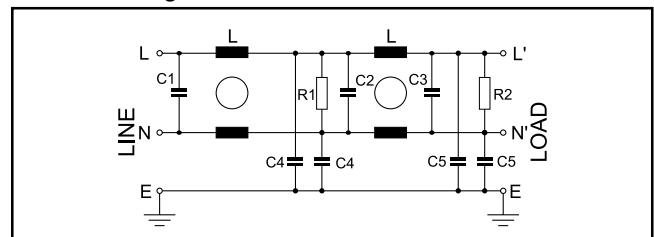

Insertion loss

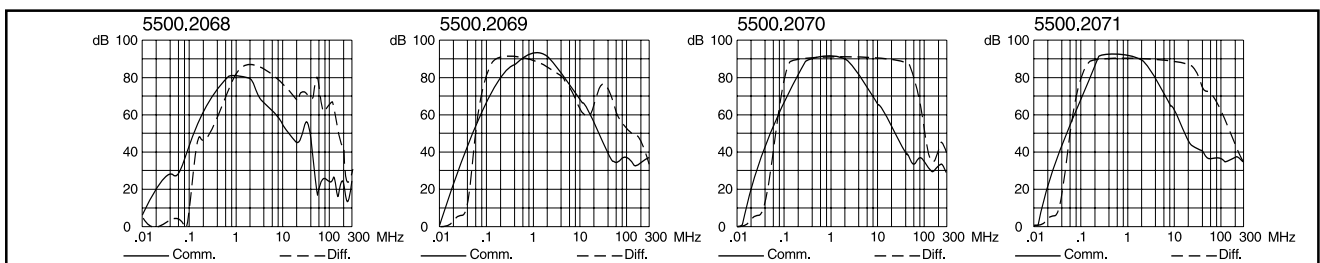

- Standard version include insulated safety screw terminals.
- Key features of the high current filter range include:
 - easy, space saving installation
 - high symmetrical and asymmetrical mode attenuation (from 10 kHz to 300 MHz)
- To maximize the filter performance in the application, the following EMC-rules should be considered:
 - physical separation of filter input and output lines
 - physical separation of the interference source itself
 - dedicated earth connection for the filter


Optional version:

- Wire lead connections instead of the screw terminals
- Contact Schurter for minimum order quantity


EMC-Power Line Filters for 1-Phase Systems

FMAB and FMBB Series, Cases


Case 16-2

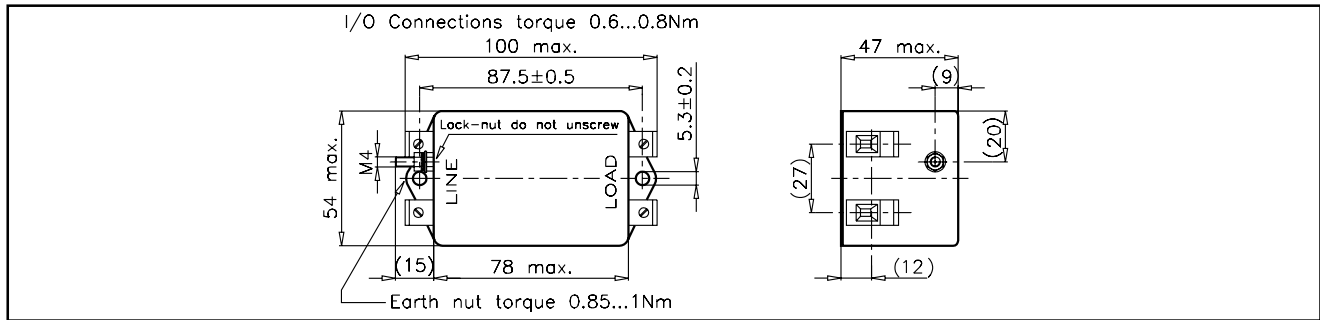


Case 24-2

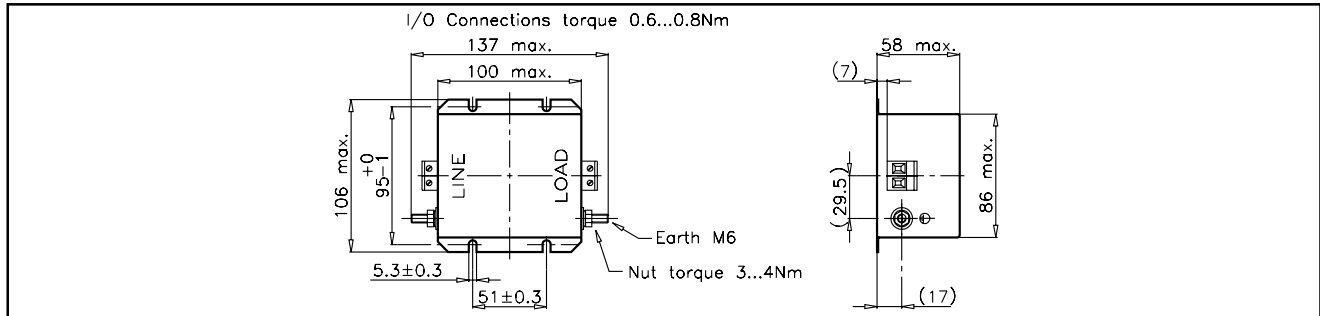

Case 24-6

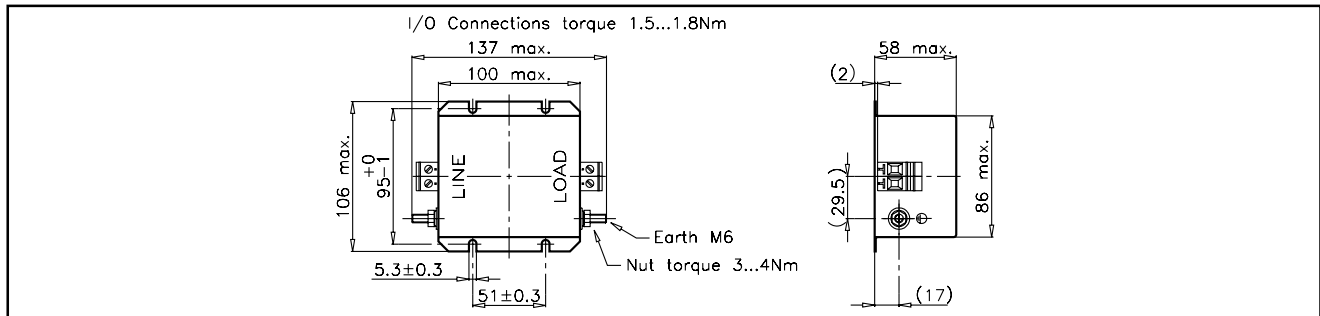

Case 31-2

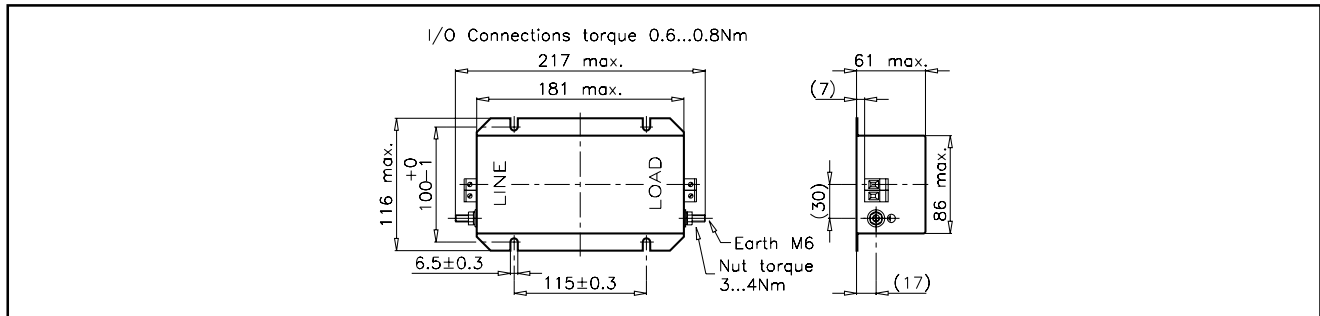

Case 31-6

