




Connectors System AC 164 Panel Mounting

AC 164 EST/ 5 white

plug, 5 pole, white, coding: 1 (mains), voltage rating: 240/400 V, current rating: 16 A, cross-section rating: 1.5 mm², wall thickness min.: 0.5 mm, wall thickness max.: 1.2 mm

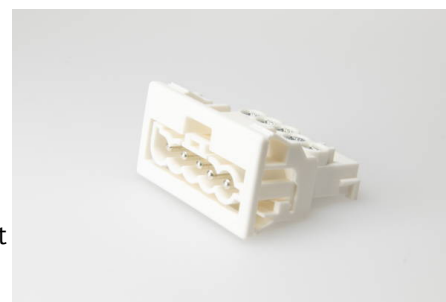

Order Info

reference number (ref. no.)	148755
Applications	Lighting, Installation, Electrical Appliances
PU	100
EAN	4028012123988

Type

type	plug
number of poles	5 pole
clamping units per pole	1
colour	white
coding	1 (mains)
cross-section rating	1.5 mm ²
PE function	yes
protection against incorrect plugging	yes
latch	yes

Technical Data

voltage rating	240/400 V
current rating	16 A
insulating material	PA 6.6
contact material	brass
core cross-section min.	0.5 mm ²
core cross-section max.	1.5 mm ²
impulse voltage rating	4.0 kV
flammability rating	V-2
max. Ambient Temperature Operation	70 °C
IP code	IP20
IP code when plugged	IP40
type of conductor solid	yes
type of conductor flexible	yes
type of conductor stranded	yes

stripping length	7.0 mm
Assembly Contact Screw	PZ 1 / \cup 0.5 Nm
wall thickness min.	0.5 mm
wall thickness max.	1.2 mm
Approbation EN61535	AC 164_EN61535_20190125_DEKRA_ENEC_71-107174_web.pdf
Approbation UL	160_163_AC164_AC166_20011003_20170727_UL_E220480_Sec.1-6