

KAZ & MIS Series

13/32" x 2" 600Vac KAZ Actuator and MIS non time-delay pin indicating supplemental fuses



KAZ Actuator



MIS Fuse 600Vac 1 to 12A

Description

KAZ is a non-fuse actuator (not a fuse) for use in parallel with a 50 amp or greater fuse to provide indication a fuse has opened by opening at 10 or more amps. The KAZ can also be applied in a 1-, 2- or 3-pole block with miniature signaling switches to provide remote status indication.

MIS fuses are non time-delay pin indicating supplemental fuses used to provide a visual indication of an open fuse condition.

Catalog symbol / color code

- KAZ - Black (600Vac max actuator - not a fuse)
- MIS - Black (600Vac max 1 to 12A)

Ratings

Fuse Amp Range	Interrupting Rating at Rated Voltage	Agency Information	
	600Vac	UL	CSA
MIS 1 to 12	200kA	-	-
KAZ* N/A	200kA	X	-

* KAZ is not a fuse.

KAZ Agency information

- CE
- UL Listed, Guide JDVS, File E58836

KAZ Catalog number (not a fuse)

KAZ


MIS Catalog numbers (amps)

MIS-1	MIS-3	MIS-5	MIS-10
MIS-2	MIS-4	MIS-8	MIS-12

MIS Electrical characteristics

Fuse Amps	% of Amp Rating	Opening Time
All	110%	4 Hours minimum
1-5A	150%	6 minutes max
6-12A	150%	12 minutes max

Dimensions - in (mm)



Features

KAZ (not a fuse)

- Connects in parallel with fuses having a rating of 50 amps or more
- Opens at 10A or more
- Use with Bussmann signal blocks to actuate a miniature switch that closes a signal circuit when the KAZ pin indicator ejects upon opening
- Gives a direct visual indication of an open fuse by the ejected, spring actuated pin
- UL Listed as "fuse accessory"
- Mounts in Bussman signal blocks 2778 (1-pole), 2837 (2-pole) and 2838 (3-pole)

MIS (non time-delay fuse)

- Gives a direct visual indication of an open fuse by ejected (spring actuated) pin
- Can be used in circuits of 600Vac or less
- 200kA Interrupting rating

Typical applications

KAZ

- Large shunt-trip fused switches
- Fuse-protected circuits rated 50 amps or more with shunt-trip devices

MIS

- 480V Control circuits
- PLC Circuits

Recommended fuse blocks /fuseclips

Catalog No.	Description	Data Sheet #
2778	1-Pole block (KAZ Only)	*
2837**	2-Pole block (KAZ Only)	*
2838**	3-Pole block (KAZ Only)	*
1A3400, 5956 & 5960 Series	PCB Fuseclips	2132

* See next page for details.

**Includes fuseclips to hold spare KAZ.

Fuse block with miniature signaling switches for KAZ only

Voltage

- 600V



Agency information

- UL Recognized, Guide QEUY2, File E61918

Dimensions ± 1/31" (0.8mm)

Cat. No.	Poles	Inches/(mm's)			Mounting Data		
		A	B	C	Hole	C'Bore	Screw
2778	1	1.75 (44.5)	—	2.5 (63.5)	1.73	0.328	#8
2837*	2	5.31 (134.9)	4.81 (122.2)	3 (76.2)	0.250	—	#12
2838*	3	6.63 (168.3)	6.125 (155.6)	3 (76.2)			

* Includes fuseclips to hold spare KAZ.

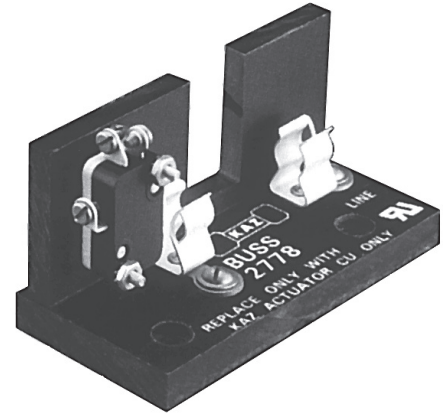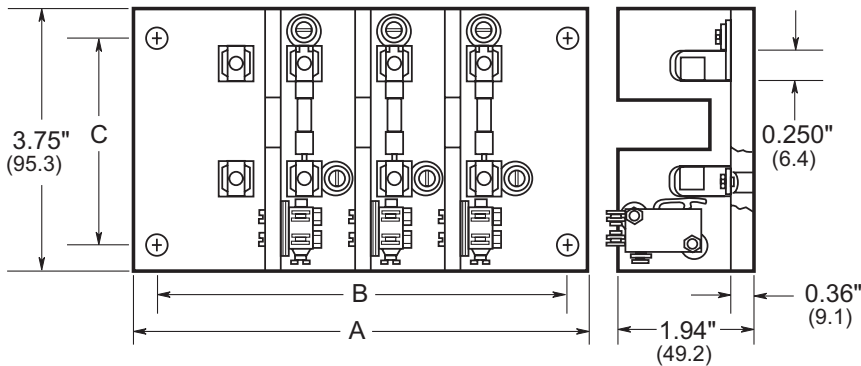

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton's Bussmann Business

114 Old State Road
Ellisville, MO 63021
United States
www.Bussmann.com

© 2014 Eaton
All Rights Reserved
Printed in USA
Publication No. 2021 BU-SB14290
April 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.