


MU075CxxxAQ_CLKS Series

General - Outdoor

DWG NO. : MSSD-5879 A0



Fe	atu	res



High efficiency: 91% Typ.

· IP67 design for indoor or outdoor installations

High surge immunity

· Support Time-shared dimming function

· Compliance to worldwide safety regulations for lighting

· Suitable for dry/damp locations



	Model	035	045	053	070	085	105	120	140	175	210	245	280	300	315	350	375	420	50
(ML	J075CXXXAQ_CLKS)	035	045	055	0/0	005	105	120	140	1/5	210	245	200	500	515	550	575	420	50
	Efficiency(120Vac)(Typ.) _{Note.1}	88%	88%	88%	87%	87%	87%	87%	86%	86%	86%	86%	85%	85%	85%	84%	84%	83%	83
	Efficiency(230Vac)(Typ.) _{Note.1}	91%	91%	91%	90%	90%	90%	90%	89%	89%	89%	89%	88%	88%	88%	87%	87%	86%	86
	Voltage Range (V) _{Note.2}				90~	~305Vac	, OR 127~	- 430Vdc	(Derating	may be r	need unde	er low inp	uts, Refe	r to 'Dera	ting Curve	e')			
	Voltage Rate (V) _{Note.2}									100Vac-2	277Vac								
	Frequency Range (Hz)									47~	63								
								0.99	9 (Typ.) w	ith 80%~′	100% loa	d,at 120V	ac						
Input	Power Factor(Typ.)							0.96	6 (Typ.) w	ith 80%~′	100% loa	d,at 230V	ac						
								;	>0.9 with	30%~100	% load,at	t 277Vac							
	THD(Typ.)							<15% w	ith 80%~	-100% lo	ad, at	100Vac~2	77Vac						
	(Typ.)							<20% v	rith 50%`	100% loa	ıd, at 1	100Vac~27	7Vac						
	AC Current(Typ.)							1.	0A at 100	VAC inpu	ut, 0.5A a	t 230VAC	;						
	Inrush Current(Max.)	50	A at 230\	ac input	25℃ Colo	d Start (t	ime wide=	500uS, n	neasured	at 50% Ip	eak,Not a	applicable	e for the ir	nrush cur	rent to No	ise Filter	for less th	nan 0.2n	ns)
	Leakage Current(Max.)								0.75	mA at 27	7Vac/60H	Ηz							
	Voltage range (V)	214	166	142	108	88	72	63	54	43	36	31	27	25	24	21	20	18	1
	Rated Current(mA)	350	450	530	700	850	1050	1200	1400	1750	2100	2450	2800	3000	3150	3500	3750	4200	50
	Rated Power (W)	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	7
	Voltage ADJ. Range (V)	107~214	83~166	71~142	54~108	44~88	36~72	32-63	27~54	21~43	18~36	15~31	13~27	13~25	12~24	11~21	10~20	9~18	7~
Output	Ripple&Noise Current(Typ.)	≤10%((PK-AV) /AV) with LED default mode and full load)																	
Output	Current Tolerance									±59	%								
	Line Regulation									±19	%								
	Load Regulation	±3%																	
	Current ADJ. Range									-									
	Turn on delay Time								<2s, at	120Vac;	<1s, at 2	77Vac							
		230	180	155	119	98	81	71	62	50	43	38	33	31	30	27	26	24	2
	Over Voltage(V)		Pr	otection t	vpe: Volta	age limitin	ig.output v	vill not ex	cceed the	upper lin	nit voltage	e, recove	rs autom	atically af	ter fault c	ondition is	s removed	d.	
	Over Current					-		Pr	otection ty	ne: Cons	tant curre	ant limitin	7						
Protection	Short Circuit					P	rotection			-			-	removed	1				
						г	TOLECTION	type. The	up mode	Tecovers	automat		1 511011 15	Terrioveu					
	Over temperature	Р	rotection	type : De	crease ou	tput curr	ent . Whe	n TC read	hes 105±	:10℃, th	e output	current de	ecrease to	o 50% rat	te value u	ntil the TO	C reaches	; 75±15ໍ	С
	Operating Temp.	-							40~+70℃	(Pofor to									
	Tc							-	+0~+70 C	90°C		j cuive)							
	-	-								20~95									
Environment	Operating Humidity Storage Temp., Humidity								-40		10-95%R	Ц							
	Temp. Coefficient									~+80℃, 03%/℃(
	Vibration						10 500	- EC 12m				acab alan		7 0200					
	Safety Standard					1	JL 8750,	Iz,5G 12n		-			-		1				
	Withstand Voltage					U	L 8730,		3.75KVac					19510.14	+				
Safety &	Isolation Resistance	-					I/P	-O/P, I/P-					-	н					
EMC	EMC Emission							015/FCC											
	EMC Immunity					F	N61000-4								7				
	MTBF							000 Hour		-									
	Lifetime							000 Hours	-										
Others	Dimension	-					JU,U				nm (Lx)		2220 (1761	.,,					
									111 X 01	.5 x 37 1		**^!!)							
	Weight	1								0.75	'''Y								


subject to change without notice


Page 1 of 5




MOONS' MU075CxxxAQ_CLKS Series General - Outdoor

DWG NO. : MSSD-5879 A0

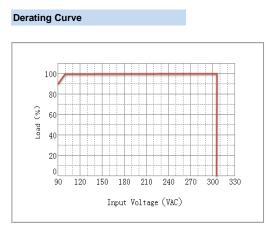


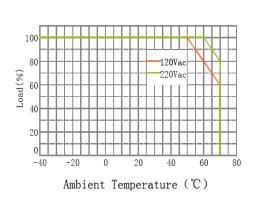




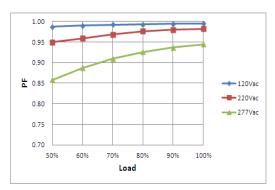


Power Factor VS. Load Curve

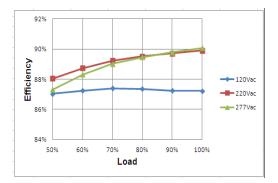

Life Time VS. Tcase (Ref.)

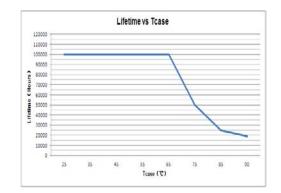

THD Curve

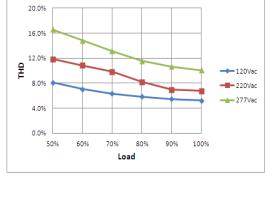

subject to change without notice

Page 2 of 5



MU075CxxxAQ_CLKS Series General - Outdoor

DWG NO. : MSSD-5879 A0

Instruction

1.Field Programmable Topology



The programmable driver can be programmed by using special PC software and the programmer module.

2.Dimming Interface Description

Pin description		•		CLKS DIMMING PROGRAMMING INTERFACE
Pin	Name	Value	Description	Vaux 12V / YE(黄色)
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply	1
2	Dim+/Program	0-10V	Dimming/Programming input	Dim+ Program ^{/ PU(} 紫色)
3	Dim-	0V	DC Ground	2

3.Dimming Software Function Instruction

Adjustable Output Current(AOC)



Users can set the rated current between 10%*Max Current and 100%*Max Current

PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current.User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty circle: 1%-99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high,-0.3V~0.8V is low.

Dim-

/ GR(灰色)

Adjustable Startup Time(AST)




Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current " that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Set driver's "Fade up Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Dimming Interface Selection(DIS) O 1-10V PWM O Smart Midnight ClockDIM Fixed ClockDIM No Dimming

PWM Logic(PWML)

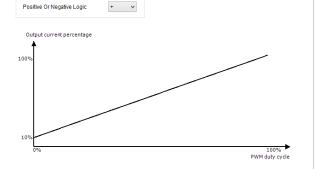


■ 1-10V

Fade Time(FT)

Fadeup Time

Fade Time(FT)

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0~10V signal from 2nd pin of the dimming interface. Default: input \leq 1V, output current 10%; input \geq 8.5V, output current 100%.

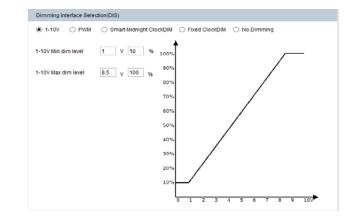

subject to change without notice

Page 3 of 5




General - Outdoor DWG NO. : MSSD-5879

A0


Instruction

Integrated Dynadimmer

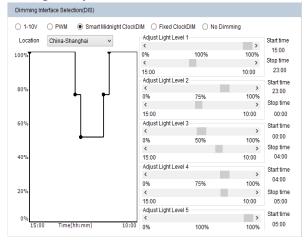

Integrated Dynadimmer allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Integrated Dynadimmer, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ONtime is defined as a period during which the driver operates continuously for \geq 4 hours to \leq 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00~10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons

Integrated Dynadimmer Time Based

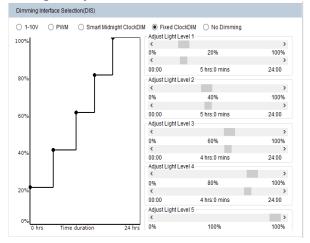

Allow users to separate 24hrs into 5 sections and corresponding output current.

No Dimming

Dimming Interface Selection(DIS)

○ 1-10V ○ PWM ○ Smart Midnight ClockDIM ○ Fixed ClockDIM ● No Dimming


The driver will be in constant output mode.

Set MODULE Working hrs(SMW)

Set Module Working hrs(SMW)

Set Module Working hrs 10 hrs

User can check how much time the driver works through this function

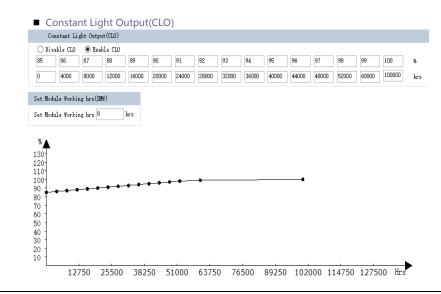

Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO. When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below: Driver target nominal output current = CLO percentage * AOC. For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be 0.98 x 500 = 600 mA The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100,000 hours).

subject to change without notice

Page 4 of 5

MOONS' MU075CxxxAQ_CLKS Series General - Outdoor

moving in better ways

