
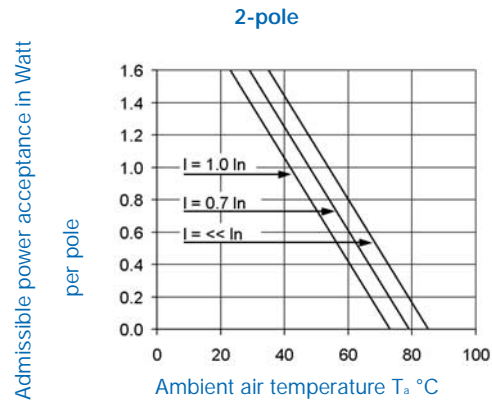


Derating curves for fuseholder

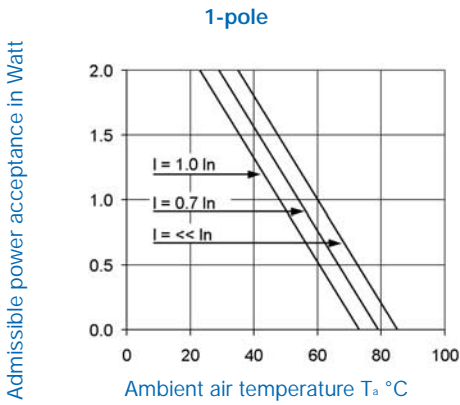

Order Numbers, type KEA: socket
Fuse drawer must be ordered separately

Fuseholder		Voltage selector		internal connections		Screw	Snap-in, panel thickness s		
1-pole	2-pole	without	3 pos.	4 pos.	with	without	1,5 mm	2,0 mm	2,5 mm
4301.0521	4301.0501	•			•				
4301.0522	4301.0502	•			•		•		
4301.0523	4301.0503	•			•			•	
4301.0524	4301.0504	•			•				•
4301.0021	4301.0001		• (max.)		•	•			
4301.0022	4301.0002		• (max.)		•		•		
4301.0023	4301.0003		• (max.)		•			•	
4301.0024	4301.0004		• (max.)		•				•
4301.2061	4301.2041		•	•		•			
4301.2062	4301.2042		•	•		•	•		
4301.2063	4301.2043		•	•		•		•	
4301.2064	4301.2044		•	•		•			•

Order Numbers, type KEA-Print: socket (internal connections)
Fuse drawer must be ordered separately

Fuseholder		Screw-on	Snap-in, panel-thickness s		
1-pole	2-pole		1,5 mm	2,0 mm	2,5 mm
4301.3211	4301.3201	•			
4301.3212	4301.3202		•		
4301.3213	4301.3203			•	
4301.3214	4301.3204				•

Order Numbers fuse drawer (Fingergrip and Extra-Safe) for types KEA, KFA, KM, KMF

Voltage markings	for types	Type		1-pole + spare fuse case	2-pole with shorting bar in the neutral side	
		1-pole	2-pole			
«XX» see table 1	KEA	Fingergrip	4301.1214.XX	4301.1014.XX	4301.2814.XX	4301.3536.XX
		Extra-Safe	4301.1224.XX	4301.1024.XX	4301.2824.XX	4301.3537.XX
without voltage selector	KEA	Fingergrip	4301.1405	4301.1401	4301.1409	4301.1413
	KEA-Print	Extra-Safe	4301.1407	4301.1403	4301.1411	4301.1415