Circuit Breaker for Equipment thermal, Drop-in type, Reset type, Solder terminals



#### **Approvals and Compliances**

#### **Description**

- Drop-in type
- Thermal circuit breaker
- 1-pole
- Reset type
- Solder, THT

#### **Unique Selling Proposition**

- Compact design
- Positively trip-free release
- Available with cover
- Different mounting possibilities

## **Applications**

- Power tools
- Household Equipment
- Power supplies and chargers
- Industrial appliances

## Weblinks

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

#### **Technical Data**

Rated Voltage AC	240 V; 50/60 Hz
Rated Voltage DC	48 V
Rated current range AC	0.05 - 12 A
Conditional short circuit ca-	IEC: Inc, PC1, AC 240 V: 2 kA
pacity	
Short circuit capacity Icn	at In < 6.5 A/240 VAC : 8 x In
	at In ≥ 6.5 A/240 VAC : 96 A
Degree of Protection	from front side IP 40 acc. to IEC 60529
Dielectric Strength	50Hz: > 1.5 kV
	Impulse 1.2/50 µs: > 2.5 kV
Insulation Resistance	$500\text{VDC} > 100\text{M}\Omega$
Endurance typical	2 x lr: 500 switching cycles
Endurance minimum	Reset type
	AC: 2 x Ir, cos φ 0.6:
	DC: $2 \times Ir$ , $L/R = 2 - 3 \text{ ms}$ :
	50 switching cycles

Overload	IEC: min. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Ambient temperature	-5°C to 60°C
Vibration Resistance	± 1.5 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Fc
	5 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Fc
Shock Resistance	100 G / 6ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal
Actuation Type	Reset type
Weight	ca. 10 g

#### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

#### **Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: T11

Approval Logo	Certificates	Certification Body	Description
DVE	VDE Approvals	VDE	VDE Certificate Number:
c <b>FU</b> °us	UL Approvals	UL	UL File Number:
(I)	CQC Approvals	CQC	CCC File Number:

## **Application standards**

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.


## Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
<b>5</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


# Dimension [mm]

T11-818

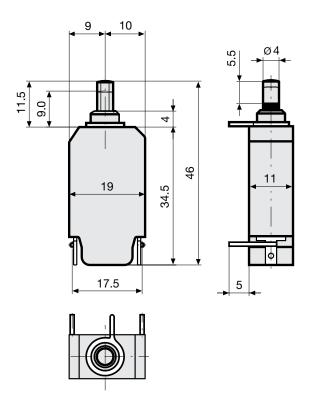


>7,5 A - 12 A on request


## **Drilling Diagrams**




## **Diagrams**

Rated current ≤7,5 A







#### Typical internal resistance

Typical internal resistance			
Rated Current [A]	Internal Resistance [ $\Omega$ ]		
0.05	380.000		
0.50	5.200		
1.00	1.350		
2.00	0.300		
3.00	0.130		
4.00	0.080		
5.00	0.040		
6.00	0.040		
7.00	0.020		
8.00	0.012		
9.00	0.012		
10.00	0.011		
11.00	0.0095		
12.00	0.0095		
13.00	0.0085		
14.00	0.0085		
15.00	0.0075		
16.00	0.0075		


#### Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient temperature [°C]	Correction factor
-5	0.87
0	0.90
+10	0.95
+23	1.00
+30	1.04
+40	1.10
+50	1.15
+60	1.20

Example: Rated current = 5 A; Environmental temperature = 40 °C; --> Correction factor = 1.1; Resulting current = 5.5 A --> Fount to next higher rated current: 6 A

#### **Time-Current-Curves**

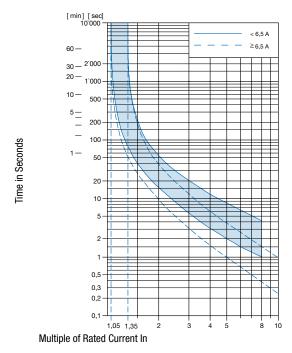

Reference Temperature +23°

## Config. Code

## T11 - 1 2 3 A B - 1.23

The characters are placeholders for the correspondingly keys of selections from the key tables.

# T11 - **1** 2 3 A B - 1.23 = Mounting

Mounting	Configuration key
Drop-in type	8
T11 - 1 <b>2</b> 3 A B - 1.23 = <b>Actuation Type</b>	
Actuation Type	Configuration key
Reset type	1
T11 - 1 2 <b>3</b> A B - 1.23 <b>= Terminal</b>	
Terminal	Configuration
	key
Solder pins PCB	8
T11 - 1 2 3 <b>A</b> B - 1.23 <b>= Shunt terminal</b>	
III - I Z 3 A B - I.Z3 = Siluit termina	
Shunt terminal	Configuration key
Shunt terminal	N
T11 - 1 2 3 A <b>B</b> - 1.23 <b>= Setting indication</b>	
Setting indication	Configuration key
Setting indication	R

T11 - 1 2 3 A B - 1.23 = Rated current

Rated current	Configuration key
0.05 A	0.05
0.1 A	0.1
0.15 A	0.15
0.2 A	0.2
0.3 A	0.3
0.4 A	0.4
0.5 A	0.5
0.6 A	0.6
0.7 A	0.7
0.8 A	0.8
0.9 A	0.9
1.0	1
1.1 A	1.1
1.2 A	1.2
1.3 A	1.3
1.4 A	1.4
1.5 A	1.5
1.6 A	1.6
1.7 A	1.7
1.8 A	1.8
1.9 A	1.9
2.0 A	2

Other rated currents on request

Rated current	Configuration key
2.1 A	2.1
2.3 A	2.3
2.5 A	2.5
2.8 A	2.8
3.0 A	3
3.3 A	3.3
3.5 A	3.5
4.0 A	4
4.5 A	4.5
5.0 A	5
5.5 A	5.5

Other rated currents on request

Rated current	Configuration key
6.0	6
6.5 A	6.5
7.0 A	7
7.5 A	7.5
8.0 A	8
8.5 A	8.5
9.0 A	9
9.5 A	9.5
10.0 A	10
11.0 A	11
12.0 A	12

Other rated currents on request

## **Variants**

Rated current	Construction variants		Config. Code	Order Number
	Shunt terminal	Setting indication		
3.0 A			T11-818-3	4400.0215
5.0 A			T11-818-5	4400.0378
7.5 A			T11-818-7.5	4400.0779
0.3 A	•		T11-818N-0.3	4400.0785
2.5 A			T11-818-2.5	4400.0831

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/ Stock-Check-SCHURTER

**Packaging Unit** 

100 Pcs

# **Accessories**

#### Description



T-Line Accessories Accessories to T-Line