

## 3M™ Workstation Monitor 724



The Workstation Monitor 724 continuously monitors the resistance of the operator and worksurface ground connections. The monitor uses a reliable resistance method that actually includes the operator's skin resistance to determine if the system is operating properly. If the operator's resistance exceeds pre-set levels of 10 megohm or 35 megohm, or the work surface connections exceed 3.7 megohm, audible and visible alarms are triggered. The unit will also warn of potentially dangerous low-resistance situations with a flashing yellow LED lamp. A switch allows the user to select either a 9V or 16V test voltage, and 10 megohm or 35 megohm resistance setting.

The monitor uses the light, compact dual conductor wrist strap (purchased separately). Dual conductors provide the resistance circuit that is monitored, as well as grounding redundancy. If one conductor fails, the other will still function to prevent sensitive components from being exposed to static.

The Workstation Monitor 724 monitors a visitor to the workstation or a second operator. In addition, the loudness of the alarm is adjustable. The Workstation Monitor comes with a dual conductor remote input jack; AC adapter; ground cord; monitor/table mat cord; two-wire connector; wire management clips; and user's guide.



3M™ Workstation Monitor 724 pictured with 3M™ Remote Input Jack 732, 3M™ Dual Conductor Wrist Band 4700 and the 3M™ Dual Conductor Cord 2360 (ground cord and band not included).

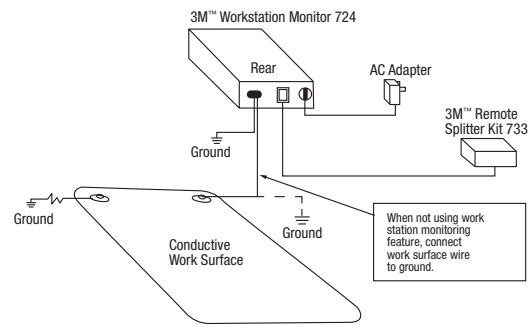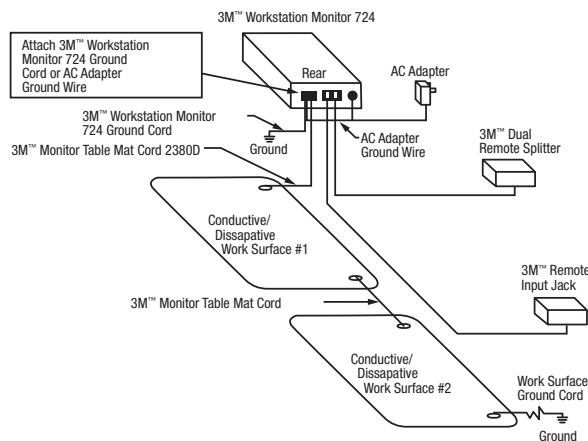

The worksurface ground resistance circuit of the 3M™ Workstation Monitor indicates a malfunction when the ground loop resistance exceeds 3.7 megohm. To determine if your mat is within this limit, perform the following procedure using an ohmmeter. Measure the resistance between the snap on the mat, where you intend to connect the 3M™ Monitor/Table Mat Replacement Cord 2380D, and the ground point for the mat. Be sure the mat is connected to ground.

Product Number	Description
----------------	-------------

724	Workstation Monitor complete with a quick connect/disconnect 3M™ Remote Jack 732 and mounting hardware
-----	--------------------------------------------------------------------------------------------------------

### 724 Monitor Properties

Item	Typical Properties
------	--------------------

Dimensions	6.5 H x 3.125 W x 1.375 L in. (16.5 x 7.9 x 3.5 cm)
------------	-----------------------------------------------------

Input Power Supply	25 VDC @ 50mA minimum
--------------------	-----------------------

AC Adapter	120VAC 60Hz 8W
------------	----------------

Test Voltage	9 VDC or 16 VDC (Switch selectable)
--------------	-------------------------------------

Test Current	Less than 3 microamps
--------------	-----------------------

Upper Resistance Limits	Wrist Strap: 10 or 35 megohm Switch selectable Worksurface: 3.7 megohm
-------------------------	------------------------------------------------------------------------------

Lower Resistance	Wrist Strap: 1.5 megohm Worksurface: none
------------------	----------------------------------------------

Accuracy	± 15%
----------	-------

### Environmental Operating Conditions

Temperature	Max. 110°F (43°C) Min. 50°F (10°C)
-------------	---------------------------------------

Humidity	Max. 75% R.H.
----------	---------------

Accessories	Remote Splitter Kit 733 Stand-By Jack 3057 Power Supply 724 for EU/UK with power plug (order separately)
-------------	----------------------------------------------------------------------------------------------------------------

## 3M™ Dual Conductor Remote Input Jacks 732

The Dual Conductor Remote Input Jack 732 may be purchased as a replacement part for the 3M™ Workstation Monitor 724. It provides two phone jacks – one for the primary worker and one for use by visitors to the work area. The 3M™ Remote Splitter Kit 733 may be purchased for use in conjunction with the Workstation Monitor 724. It offers the versatility of grounding and monitoring two workers at independent workstations that are in close proximity. The units feature a quick “connect/disconnect” system.



3M™ Remote Input Jack 732



3M™ Remote Splitter Kit 733

3M is a trademark of 3M Company. All other trademarks are owned by their respective companies.

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



### Electronics Materials Solutions Division Static Control Products

926 JR Industrial Drive  
Sanford, NC 27332-9733  
Toll-Free: 866-722-3736  
International: 919-718-0000  
Email: 3mstaticinfo@mmm.com  
www.3Mstatic.com

RoHS  
2011/65/EU



Please recycle. Printed in USA.  
© 3M 2014. All rights reserved.  
78-9102-1488-7 JHA

Product Number	Description
732	Replacement Remote Input Jack for the Workstation Monitor 724, 6 ft. (1.8 m) long cord Size, in. (cm): 3.188 H x 1 W x 1.5 in. D (8.1 x 2.5 x 3.8 cm)
733	Remote Splitter Kit, 6 ft. (1.8 m) long cord Size, in. (cm) .188 H x 1 W x 1.5 in. D (8.1 x 2.5 x 3.8 cm)

RoHS 2011/65/EU Compliant means that the product or part does not contain any of the substances in excess of the maximum concentration values (“MCVs”) in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M's knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for one year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**