

Chip Varistors

Countermeasure for surge voltage and static electricity

AVR series

Type: **AVR-M**
 AVRL

Issue date: September 2013

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

Varistors(SMD)


Countermeasure for Surge Voltage and Static Electricity

AVR Series AVR-M, AVRL Types


Varistors are voltage dependent nonlinear resistive elements with a resistance that decreases rapidly when the voltage is over the constant value.

Varistor is equivalent with Zener diode of two series connection. Therefore, do not have polarity.

CURRENT vs. VOLTAGE CHARACTERISTICS

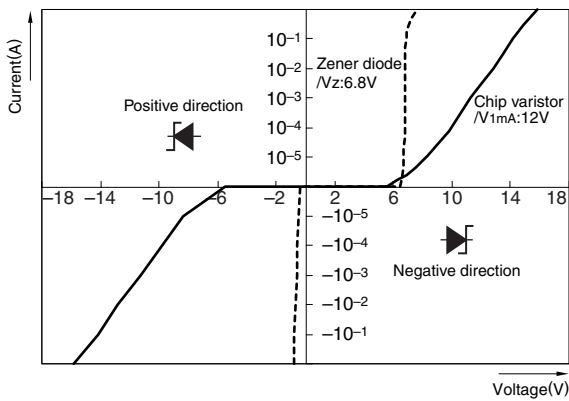


EQUIVALENT CIRCUIT




THE EFFECT OF THE VARISTOR WITHOUT VARISTOR

A malfunction and failure of electronic equipment

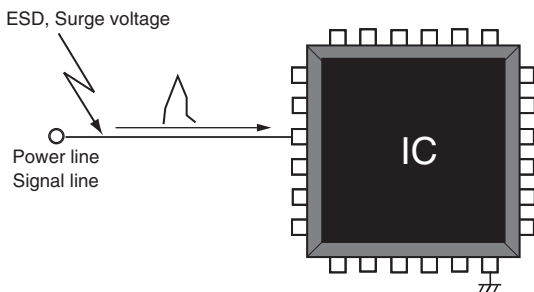

WITH VARISTOR

Suppress abnormal voltage by inserting varistor in a circuit

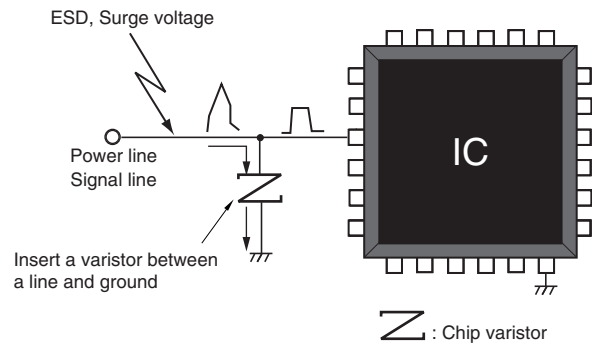

FEATURES

- No polarity, due to symmetrical current-voltage characteristics. Equivalent to anode common type Zener diode.
- Excellent electrostatic absorption capability. Response is as good or better than Zener diode. Keeps symmetrical current-voltage characteristics even after electrostatic absorption.
- Adopted the inner electrodes lamination structure. Wide range of varistor voltages are available in series (6.8 to 39V). Low capacitance items are available in series (1.1pF to). World's smallest 0402-, 0603-, 1005-, 1608-, 2012-chip types are available in series.
- Excellent mount reliability. Good for Pb-free soldering. Adopted (Ni/Sn) electroplating. Achieved good solderability and solder heat resistance.
- Can replace a Zener diode + capacitor combination. Reduced footprint and total mounting cost.

APPLICATIONS


- Electrostatic absorption
- Pulse noise absorption

TEMPERATURE RANGES


| | | |
|-----------|---------------------|---------------------|
| Type | AVR-M1005/1608/2012 | AVR-M0402/0603/AVRL |
| Operating | -40 to +125°C | -40 to +85°C |
| Storage | -40 to +125°C | -40 to +85°C |

APPLICATION EXAMPLES

| Consumer product | Application |
|----------------------|-----------------------------------|
| Mobile phone | Data terminal |
| Digital video camera | LCD panel |
| Digital camera | Touch panel |
| PDA | Button and switch unit |
| Note PC | Battery terminal |
| DVD-ROM, CD-ROM | Audio-Video input-output terminal |
| CD/MD/MP3 player | Microphone/receiver unit |
| Game machine | Controller unit |
| | CAN-BUS |
| | ECU |
| In-car equipment | Connector |
| | Air conditioner panel |
| | Car audio |
| | Car navigation |

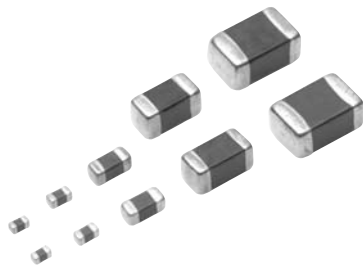


INTERNAL STRUCTURE

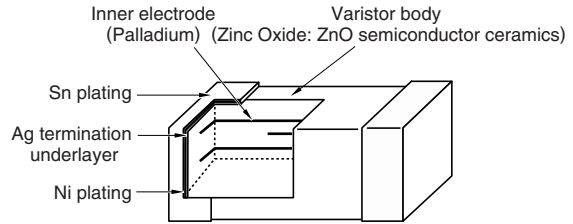


CIRCUITS SYMBOL



OPERATIONAL VOLTAGE RANGES

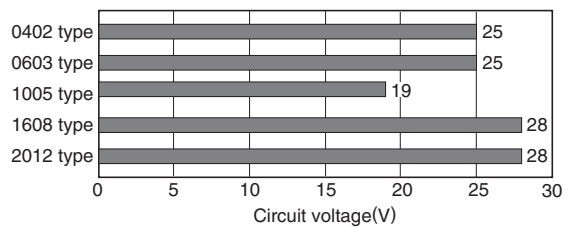

RECOMMENDED REFLOW SOLDERING CONDITIONS

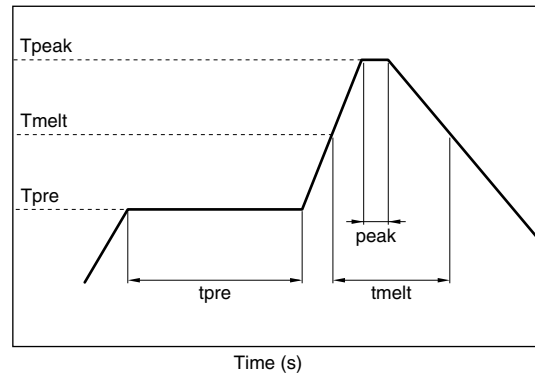

| Item | Specification | Specification | |
|-------|----------------------------------------------------------|---------------------|----------------------|
| | | For eutectic solder | For lead-free solder |
| Tpre | Preheating temperature | 160 to 180°C | 150 to 180°C |
| Tmelt | Solder melting temperature | 200°C | 230°C |
| Tpeak | Peak temperature | 240°C max. | 260°C max. |
| tpre | Preheating time | 100s max. | 120s max. |
| tmelt | Time to reach higher than the solder melting temperature | 30s max. | 40s max. |
| | Number of possible reflow cycles | 2 max. | 2 max. |

• All specifications are subject to change without notice.

AVR-M TYPE**PRODUCT IDENTIFICATION**

| | | | | | | |
|-------|------|-----|-----|-----|-----|-----|
| AVR-M | 1005 | C | 270 | M | T | AAB |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) |

| | | | | | | | |
|------|------|-----|-----|-----|-----|-----|-----|
| AVRM | 1005 | C | 6R8 | N | T | 101 | N |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) |

(1) Series name

(2) Dimensions L×W

| | |
|------|-----------|
| 0402 | 0.4×0.2mm |
| 0603 | 0.6×0.3mm |
| 1005 | 1.0×0.5mm |
| 1608 | 1.6×0.8mm |
| 2012 | 2.0×1.2mm |

(3) Structure code

(4) Varistor voltage

| | |
|-----|----------------------|
| 270 | 27×10 ⁰ V |
|-----|----------------------|

(5) Varistor voltage tolerance

| | |
|---|------|
| K | ±10% |
| M | ±20% |
| N | ±30% |



(6) Packaging style

| | |
|---|--------|
| T | Taping |
|---|--------|

(7) Capacitance and TDK internal code


(5) Capacitance tolerance

| | |
|---|------|
| N | ±30% |
|---|------|

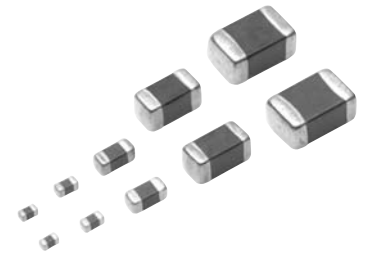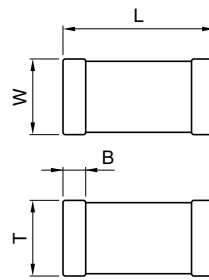SHAPES AND DIMENSIONS**0402/0603/1005/1608/2012 TYPES**

Dimensions in mm

| Type | L | W | T | B min. | Weight (mg)typ. |
|------|----------|----------|----------|--------|-----------------|
| 0402 | 0.4±0.02 | 0.2±0.02 | 0.2±0.02 | 0.07 | 0.1 |
| 0603 | 0.6±0.03 | 0.3±0.03 | 0.3±0.03 | 0.1 | 0.2 |
| 1005 | 1.0±0.05 | 0.5±0.05 | 0.5±0.05 | 0.1 | 1.2 |
| 1608 | 1.6±0.1 | 0.8±0.1 | 0.8±0.1 | 0.2 | 5 |
| 2012 | 2.0±0.2 | 1.25±0.2 | 1.0±0.2 | 0.2 | 15 |

RECOMMENDED PC BOARD PATTERN

Dimensions in mm

| Type | a | b | c |
|------|--------------|--------------|--------------|
| 0402 | 0.2 | 0.15 to 0.2 | 0.18 to 0.2 |
| 0603 | 0.25 to 0.35 | 0.2 to 0.3 | 0.25 to 0.35 |
| 1005 | 0.3 to 0.5 | 0.35 to 0.45 | 0.4 to 0.6 |
| 1608 | 0.6 to 0.8 | 0.6 to 0.8 | 0.6 to 0.8 |
| 2012 | 0.9 to 1.2 | 0.7 to 0.9 | 0.9 to 1.2 |


ELECTRICAL CHARACTERISTICS

| Part No. | Varistor voltage (Breakdown voltage) V _{1mA} (V)[DC1mA] | | Maximum continuous voltage (Rated voltage) V _{dc} (V) max. | Clamping voltage V _{cl} (V) [8/20μs] | Maximum energy E(Joule) [10/1000μs] max. | Maximum peak current I _p (A) [8/20μs] max. | Capacitance C(pF) [1kHz, 1V _{rms}] typ. | Packaging quantities (Taping) (pieces/reel) |
|--------------------|------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------|
| 0402 type | | | | | | | | |
| AVRM0402C6R8NT101N | 6.8 | (4.76 to 8.84) | 3.5 | 15[1A] | 0.01 | 4 | 100 (70 to 130) | 20,000 |
| AVRM0402C120MT330N | 12 | (9.6 to 14.4) | 5.5 | 20[1A] | 0.005 | 1 | 33 (23.1 to 43.9) | |
| 0603 type | | | | | | | | |
| AVRM0603C6R8NT331N | 6.8 | (4.76 to 8.84) | 3.5 | 14[1A] | 0.02 | 16 | 330 (231 to 429) | 15,000 |
| AVRM0603C6R8NT101N | 6.8 | (4.76 to 8.84) | 3.5 | 14[1A] | 0.01 | 10 | 100 (70 to 130) | |
| AVRM0603C080MT101N | 8 | (6.4 to 9.6) | 5.5 | 17[1A] | 0.01 | 4 | 100 (70 to 130) | |
| AVRM0603C120MT101N | 12.8 | (10 to 15.6) | 5.5 | 20[1A] | 0.01 | 5 | 100 (70 to 130) | |
| AVR-M0603C120MTAAB | 12 | (9.6 to 14.4) | 7.5 | 23[1A] | 0.01 | 1 | 33 | |
| AVRM0603C120MT150N | 12.8 | (10 to 15.6) | 5.5 | 35[1A] | 0.003 | 1 | 15 (10.5 to 19.5) | |
| AVRM0603C200MT150N | 20 | (16.0 to 24.0) | 12 | 40[1A] | 0.01 | 1 | 15 (10.5 to 19.5) [1MHz] | |
| 1005 type | | | | | | | | |
| AVRM1005C6R8NT331N | 6.8 | (4.76 to 8.84) | 3.5 | 15[1A] | 0.008 | 24 | 330 (231 to 429) | 10,000 |
| AVRM1005C6R8NT101N | 6.8 | (4.76 to 8.84) | 3.5 | 14[1A] | 0.02 | 10 | 100 (70 to 130) | |
| AVR-M1005C080MTAAB | 8 | (6.4 to 9.6) | 5.5 | 14[1A] | 0.04 | 25 | 650 | |
| AVR-M1005C080MTADB | 8 | (6.4 to 9.6) | 5.5 | 14[1A] | 0.04 | 25 | 480 | |
| AVR-M1005C080MTABB | 8 | (6.4 to 9.6) | 5.5 | 15[1A] | 0.02 | 3 | 100 | |
| AVR-M1005C080MTACB | 8 | (6.4 to 9.6) | 5.5 | 19[1A] | 0.01 | 1 | 33 | |
| AVR-M1005C120MTACC | 12 | (9.6 to 14.4) | 7.5 | 21[1A] | 0.01 | 24 | 460 [1MHz] | |
| AVR-M1005C120MTAAB | 12 | (9.6 to 14.4) | 7.5 | 20[1A] | 0.05 | 10 | 130 | |
| AVR-M1005C180MTAAB | 18 | (14.4 to 21.6) | 11 | 30[1A] | 0.06 | 16 | 120 [1MHz] | |
| AVRM1005C270KT101N | 27 | (24 to 30) | 19 | 44[1A] | 0.06 | 4 | 100 (70 to 130) | |
| AVR-M1005C270MTAAB | 27 | (21.6 to 32.4) | 15 | 47[1A] | 0.06 | 4 | 40 | |
| AVR-M1005C270MTABB | 27 | (21.6 to 32.4) | 15 | 49[1A] | 0.05 | 1 | 15 | |
| 1608 type | | | | | | | | |
| AVR-M1608C080MTAAB | 8 | (6.4 to 9.6) | 5.5 | 15[2A] | 0.09 | 30 | 650 | 4,000 |
| AVR-M1608C120MT6AB | 12 | (9.6 to 14.4) | 7.5 | 20[2A] | 0.09 | 50 | 1050 | |
| AVR-M1608C120MT2AB | 12 | (9.6 to 14.4) | 7.5 | 20[2A] | 0.06 | 15 | 400 | |
| AVR-M1608C180MT6AB | 18 | (14.4 to 21.6) | 11 | 30[2A] | 0.1 | 30 | 600 | |
| AVR-M1608C220KT6AB | 22 | (19.8 to 24.2) | 16 | 34[2A] | 0.1 | 30 | 560 | |
| AVR-M1608C220KT2AB | 22 | (19.8 to 24.2) | 16 | 37[2A] | 0.03 | 10 | 210 | |
| AVR-M1608C270KT6AB | 27 | (24 to 30) | 19 | 42[2A] | 0.1 | 48 | 430 | |
| AVR-M1608C270KT2AB | 27 | (24 to 30) | 19 | 42[2A] | 0.1 | 20 | 160 | |
| AVR-M1608C270KTACB | 27 | (24 to 30) | 19 | 54[2A] | 0.05 | 10 | 60 | |
| AVRM1608C270KT800M | 27 | (24 to 30) | 19 | 53[2A] | 0.02 | 28 | 80 (64 to 96) | |
| AVR-M1608C270MTAAB | 27 | (21.6 to 32.4) | 17 | 52[2A] | 0.05 | 2 | 30 | |
| AVR-M1608C270MTABB | 27 | (21.6 to 32.4) | 17 | 52[2A] | 0.05 | 2 | 15 | |
| AVRM1608C390KT271N | 39 | (35 to 43) | 28 | 69[2A] | 0.1 | 78 | 270 (189 to 351) | |
| 2012 type | | | | | | | | |
| AVR-M2012C120MT6AB | 12 | (9.6 to 14.4) | 7.5 | 20[5A] | 0.2 | 60 | 1000 | 2,000 |
| AVR-M2012C220KT6AB | 22 | (19.8 to 24.2) | 16 | 38[5A] | 0.3 | 100 | 800 | |
| AVR-M2012C390KT6AB | 39 | (35 to 43) | 28 | 62[5A] | 0.3 | 100 | 430 | |


TERMINOLOGY

| Item | Unit | Terminology |
|-----------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Varistor voltage (Breakdown voltage) | V _{1mA} (V) | Voltage measured across the varistor when DC1mA is applied. |
| Maximum continuous voltage (Rated voltage) | V _{dc} (V) | Maximum DC voltage that can be applied continuously. Varistor leakage current: 50μA max. (Within the range of maximum allowable circuit voltage) |
| Clamping voltage | V _{cl} (V) | Voltage appearing across the varistor when a pulse current (8/20μs*) of specified peak value is applied. |
| Maximum energy | E (Joule) | Maximum energy that can be absorbed without deteriorating varistor characteristics when an impulse (10/1000μs*) is applied once. |
| Maximum peak current | I _p (A) | Maximum current that can be withstood without deteriorating varistor characteristics when an impulse current (8/20μs*) is applied once. |
| Capacitance | C (pF) | Capacitance measured at 1kHz (or 1MHz) of oscillator frequency and 1V _{rms} of oscillator voltage. |

*1 8/20μs test waveform

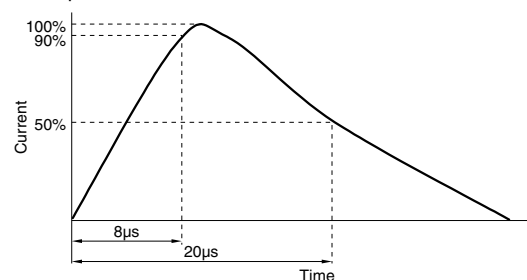

*2 10/1000μs test waveform

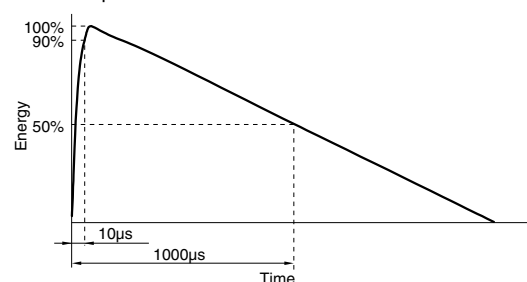

• All specifications are subject to change without notice.

AVRL TYPE

PRODUCT IDENTIFICATION

| | | | | | | |
|------|-----|-----|-----|-----|-----|-----|
| AVRL | 10 | 1A | 3R3 | F | T | A |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

| | |
|----|-----------|
| 04 | 0.4×0.2mm |
| 06 | 0.6×0.3mm |
| 10 | 1.0×0.5mm |
| 16 | 1.6×0.8mm |

(3) Maximum continuous voltage

| | |
|----|-------|
| 1A | 10Vdc |
| 1C | 16Vdc |
| 1E | 25Vdc |

(4) Capacitance

| | |
|-----|-------|
| 1R1 | 1.1pF |
| 2R2 | 2.2pF |
| 3R3 | 3.3pF |
| 6R8 | 6.8pF |

(5) Capacitance tolerance



| | |
|---|--------|
| N | ±0.3pF |
| D | ±0.5pF |
| F | ±1pF |
| G | ±2pF |

(6) Packaging style

| | |
|---|--------|
| T | Taping |
|---|--------|

(7) Varistor voltage and TDK internal code


SHAPES AND DIMENSIONS

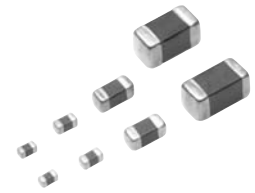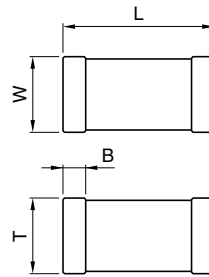

Dimensions in mm

| Type | L | W | T | B min. | Weight (mg)typ. |
|------|----------|----------|----------|--------|-----------------|
| 0402 | 0.4±0.02 | 0.2±0.02 | 0.2±0.02 | 0.07 | 0.1 |
| 0603 | 0.6±0.03 | 0.3±0.03 | 0.3±0.03 | 0.1 | 0.2 |
| 1005 | 1.0±0.05 | 0.5±0.05 | 0.5±0.05 | 0.1 | 1.2 |
| 1608 | 1.6±0.1 | 0.8±0.1 | 0.8±0.1 | 0.2 | 5 |

RECOMMENDED PC BOARD PATTERN



Dimensions in mm

| Type | a | b | c |
|------|--------------|--------------|--------------|
| 0402 | 0.2 | 0.15 to 0.2 | 0.18 to 0.2 |
| 0603 | 0.25 to 0.35 | 0.2 to 0.3 | 0.25 to 0.35 |
| 1005 | 0.3 to 0.5 | 0.35 to 0.45 | 0.4 to 0.6 |
| 1608 | 0.6 to 0.8 | 0.6 to 0.8 | 0.6 to 0.8 |

ELECTRICAL CHARACTERISTICS


| Part No. | Capacitance C(pF) [1MHz, 1Vrms] | Maximum continuous voltage (Rated voltage) Vdc(V) max. | Insulation resistance Rdc(MΩ) [3Vrms] min. | Varistor voltage V _{1mA} (V)[DC1mA] typ. | Packaging quantities (Taping) (pieces/reel) |
|------------------|---------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------|
| 0402 type | | | | | |
| AVRL041E1R1NTA | 1.1[0.8 to 1.4] | 25 | 10 | 39 | 20,000 |
| 0603 type | | | | | |
| AVRL061E1R1NTA | 1.1[0.8 to 1.4] | 25 | 10 | 39 | 15,000 |
| 1005 type | | | | | |
| AVRL101A1R1NTA | 1.1[0.8 to 1.4] | 10 | 10 | 90 | 10,000 |
| AVRL101A1R1NTB | 1.1[0.8 to 1.4] | 10 | 10 | 39 | |
| AVRL101C2R2DTA | 2.2[1.7 to 2.7] | 16 | 10 | 90 | |
| AVRL101A3R3FTA | 3.3[2.3 to 4.3] | 10 | 10 | 27 | |
| AVRL101A6R8GTA | 6.8[4.8 to 8.8] | 10 | 10 | 27 | |
| 1608 type | | | | | |
| AVRL161A1R1NTA | 1.1[0.8 to 1.4] | 10 | 10 | 90 | 4,000 |
| AVRL161A1R1NTB | 1.1[0.8 to 1.4] | 10 | 10 | 39 | |
| AVRL161A3R3FTA | 3.3[2.3 to 4.3] | 10 | 10 | 27 | |
| AVRL161A6R8GTA | 6.8[4.8 to 8.8] | 10 | 10 | 27 | |

TERMINOLOGY


| Item | Unit | Terminology |
|--------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Capacitance | C (pF) | Capacitance measured at 1MHz of oscillator frequency and 1Vrms of oscillator voltage. |
| Maximum continuous voltage (Rated voltage) | Vdc (V) | Maximum DC voltage that can be applied continuously. Varistor leakage current: 50μA max. (Within the range of maximum allowable circuit voltage) |
| Insulation resistance | Rdc (MΩ) | Insulation resistance appearing across the varistor when specified voltage is applied. |
| Varistor voltage (Breakdown voltage) | V _{1mA} (V) | Voltage measured across the varistor when DC1mA is applied. |

• All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS CURRENT vs. VOLTAGE CHARACTERISTICS

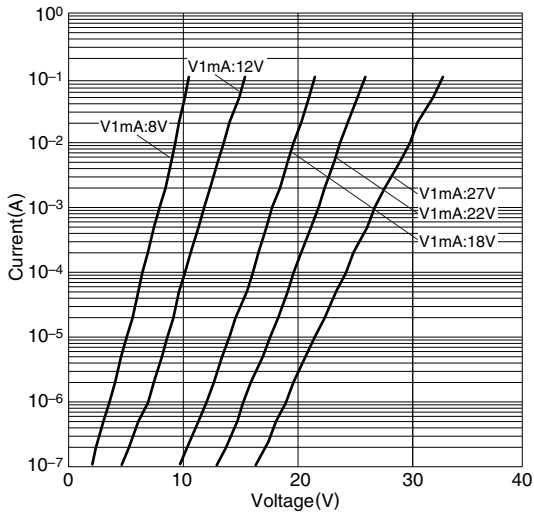


IMPEDANCE vs. FREQUENCY CHARACTERISTICS

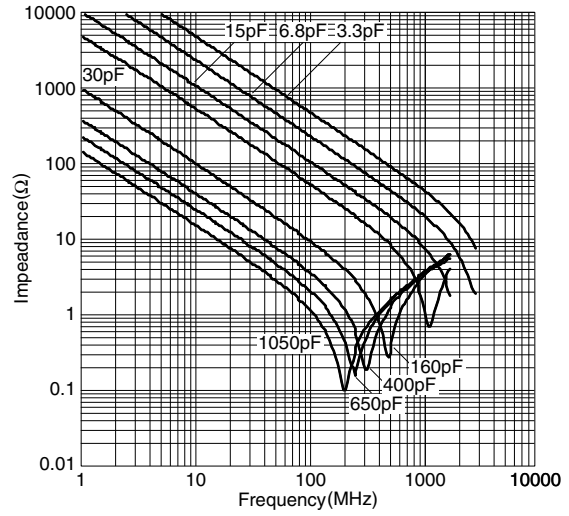

TRANSMISSION CHARACTERISTICS

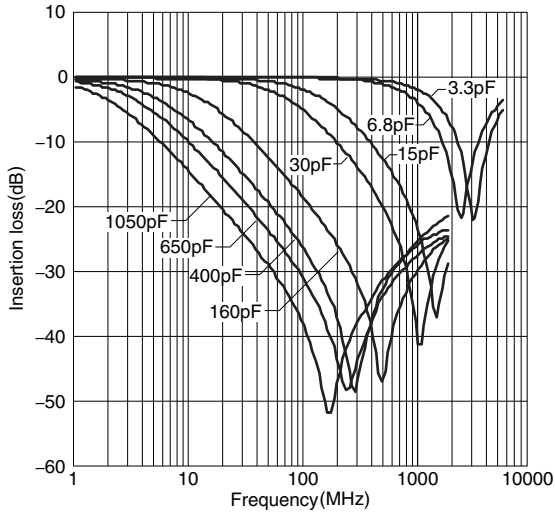

CAPACITANCE vs. FREQUENCY CHARACTERISTICS

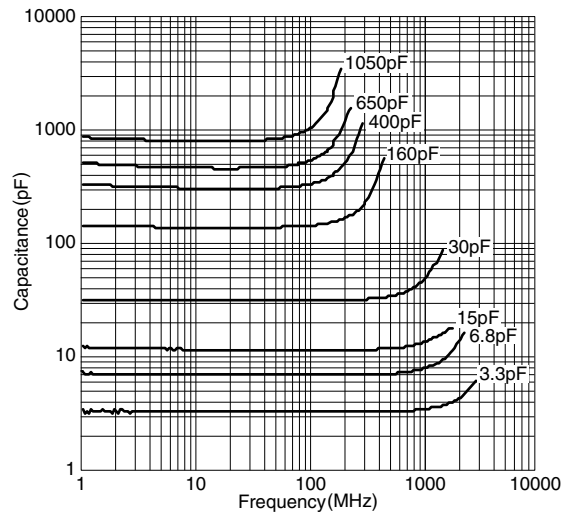


• All specifications are subject to change without notice.

ELECTROSTATIC DISCHARGE TESTS


TEST CONDITIONS

150pF, 330Ω contact discharge
Charged voltage /8kV, 0.1s interval


MEASURING CIRCUIT

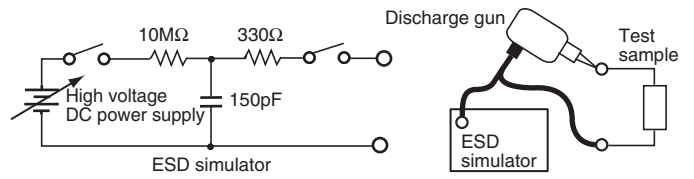


AVR-M0603 TYPE

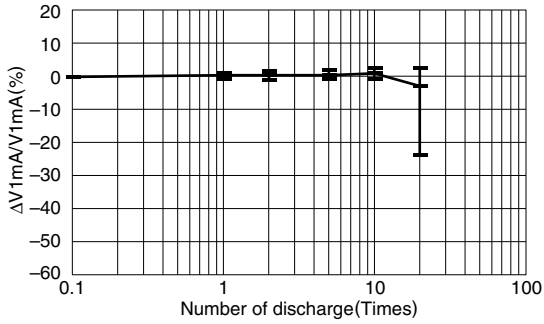


AVR-M1005 TYPE

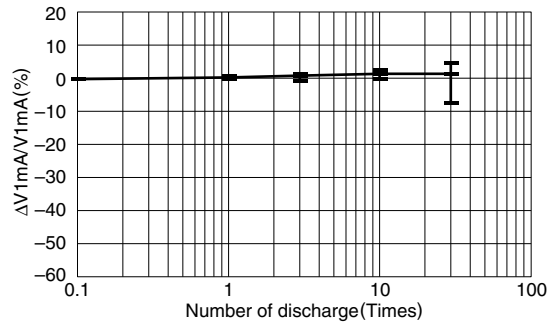

AVR-M1608 TYPE

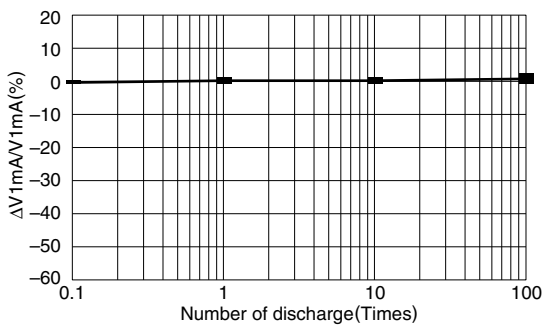


AVRL101A3R3F

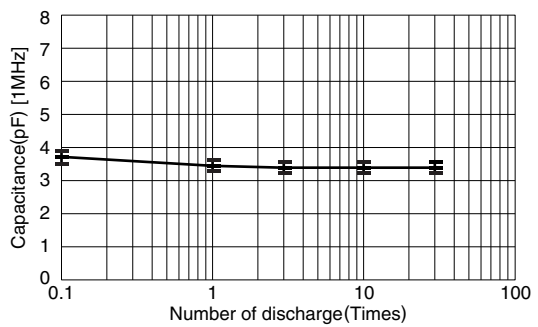

• All specifications are subject to change without notice.

ELECTROSTATIC ABSORPTION CHARACTERISTICS


DISCHARGE CURRENT WAVEFORM

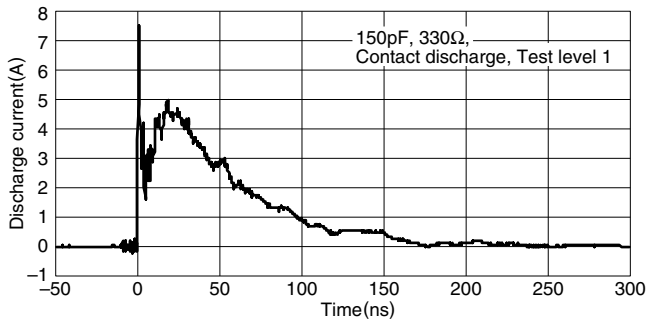


WAVEFORM PARAMETERS [IEC61000-4-2]

| Test level | ESD Charge voltage (kV) | First peak current of discharge (A) | Rise time (ns) |
|------------|-------------------------|-------------------------------------|----------------|
| 1 | 2 | 7.5 | 0.7 to 1.0 |
| 2 | 4 | 15 | 0.7 to 1.0 |
| 3 | 6 | 22.5 | 0.7 to 1.0 |
| 4 | 8 | 30 | 0.7 to 1.0 |



DISCHARGE VOLTAGE WAVEFORM

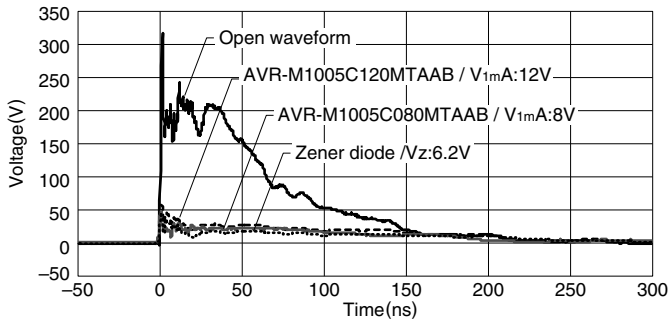

MEASURING CIRCUIT

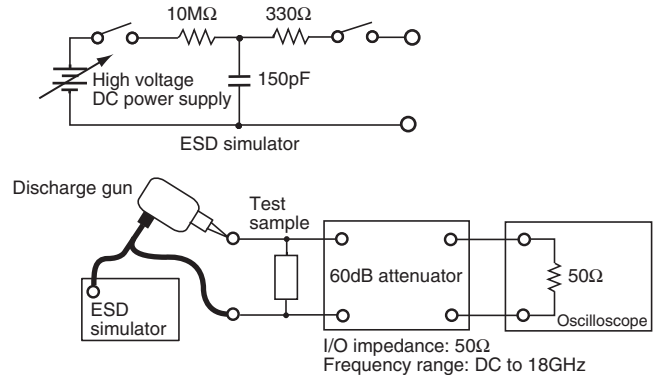

ESD ABSORPTION CHARACTERISTICS COMPARISON OF VARIOUS ELEMENTS

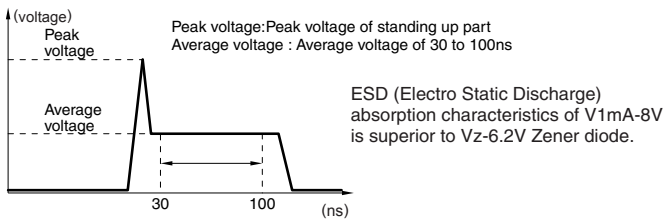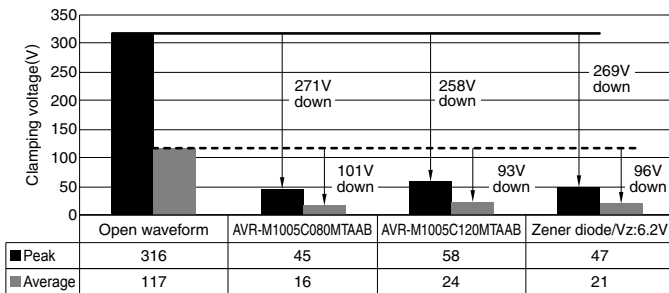


MERITS OF REPLACEMENT FROM ZENER DIODE

(1) Reduction in the number of parts


REDUCTION EXAMPLES

Zener diode+capacitor

Chip varistor

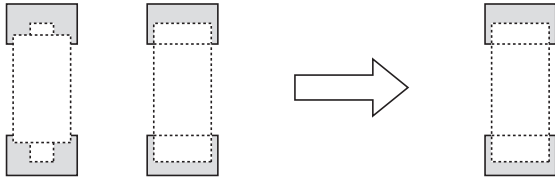


EXAMPLE OF REPLACEMENT AT AUDIO TERMINAL

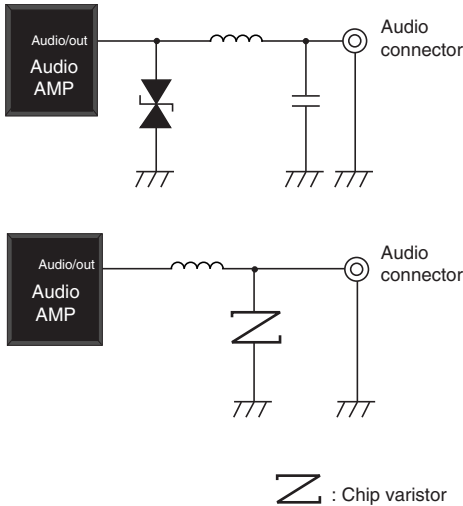

(2) Improved electrostatic absorption capability


COMPARE DATA OF CHIP VARISTOR AND ZENER DIODE ABOUT IC PROTECTION

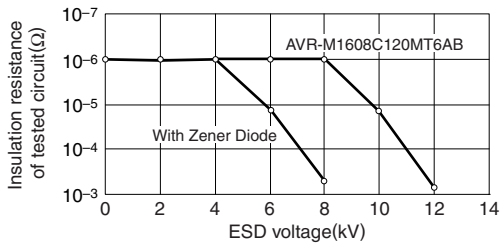


CMOS: D74HC04C
 ESD generator : Noise Laboratory Co.,Ltd., ESS -630A
 200pF-0Ω method model equipment
 Contact type discharge
 ESD applied point: Vcc-ground

APPLICATION EXAMPLES

SMART PHONE

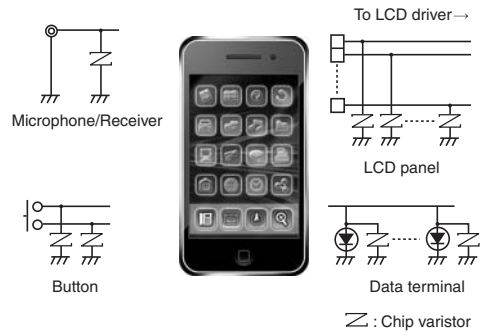


AUDIO/VIDEO

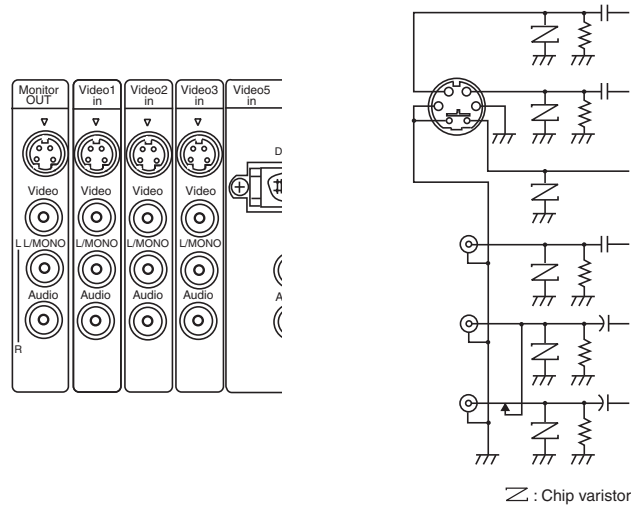


APPLICATION EXAMPLES


USB 2.0

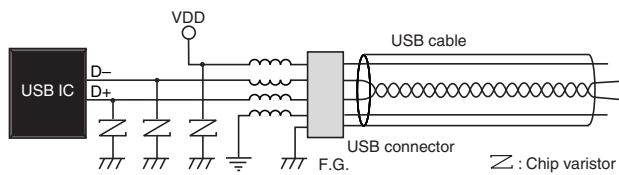

MEASURING CIRCUIT

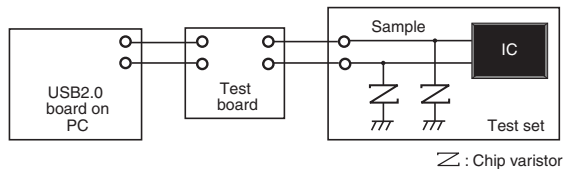


WITHOUT VARISTOR

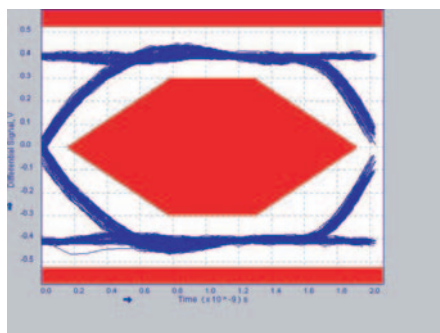


WITH VARISTOR

AVRL101A3R3FTA (3.3pF)

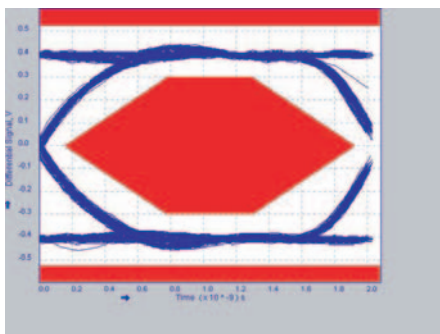

AVRL101A6R8GTA (6.8pF)

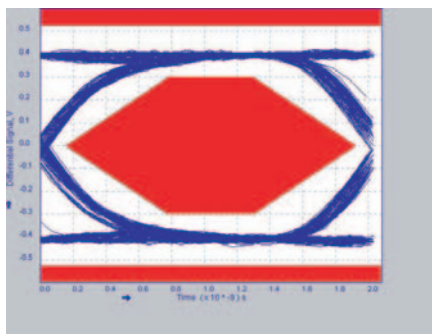

• All specifications are subject to change without notice.