


## HE6H



Standoff feet with wire protector

12 mm

4.2 mm

7 mm




4-6 mm<sup>2</sup> 20-10 AWG

400 V 600 V

16 A 40 A

0.8 Nm 7.0 lb-in

## HE10H



Standoff feet with wire protector

15 mm

4.3/5.7 mm

8.5 mm




6-10 mm<sup>2</sup> 18-8 AWG

400 V 600 V

25 A 50 A

1.2 Nm 10.6 lb-in

## HE16H




Standoff feet with wire protector

15 mm

4.3/5.7 mm

8.5 mm




10-16 mm<sup>2</sup> 18-6 AWG

400 V 600 V

35-63 A 63 A


2.0 Nm 17.7 lb-in

Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
HE6HWPR/02	100	HE10HWPR/02	40	HE16HWPR/02	40
HE6HWPR/03	100	HE10HWPR/03	40	HE16HWPR/03	40
HE6HWPR/04	100	HE10HWPR/04	40	HE16HWPR/04	40
HE6HWPR/05	100	HE10HWPR/05	40	HE16HWPR/05	40
HE6HWPR/06	50	HE10HWPR/06	20	HE16HWPR/06	20
HE6HWPR/07	50	HE10HWPR/07	20	HE16HWPR/07	20
HE6HWPR/08	50	HE10HWPR/08	20	HE16HWPR/08	20
HE6HWPR/09	50	HE10HWPR/09	10	HE16HWPR/09	10
HE6HWPR/10	25	HE10HWPR/10	10	HE16HWPR/10	10
HE6HWPR/11	25	HE10HWPR/11	10	HE16HWPR/11	10
HE6HWPR/12	25	HE10HWPR/12	10	HE16HWPR/12	10




Dimensions mm

A = 12.0 I = 9  
 B = M3.5 J = 9.6  
 C = 7.7 K = 13.9  
 D = 4.3 L = 140 (12 pole)  
 E = Ø4.2 M = 21.8  
 F = Ø6.3 N = 22.6  
 G = 12.0 O = 15  
 H = Ø4.1



Dimensions mm

A = 15.0 I = 10.7  
 B = M4 J = 11.3  
 C = 9.3 K = 17.5  
 D = 5.7 L = 175 (12 pole)  
 E = Ø4.3/5.7 M = 27.8  
 F = Ø8.2 N = 25.1  
 G = 15.0 O = 16  
 H = Ø5.0



Dimensions mm

A = 15.0 I = 10.7  
 B = M5 J = 11.3  
 C = 9.3 K = 17.5  
 D = 5.7 L = 175 (12 pole)  
 E = Ø4.3/5.7 M = 27.8  
 F = Ø8.2 N = 25.1  
 G = 15.0 O = 16  
 H = Ø5.6

## PLUGGABLE EUROSTRIPS Panel Mount


For wire-to-wire connections in HVAC, appliance, equipment, power and other distribution applications. Pluggable Eurostrips® speed and simplify replacement of subassemblies, etc. They reduce downtime and misconnections.

Two-piece pluggable terminal strips feature tubular screw clamps, with recessed metal parts for finger protection. A spring loaded contact prevents inadvertant unplugging.

The headers and plugs are available with flat base or standoff feet and can be panel mounted or free float. Offered in easy to cut 12 pole strips, they can also be orderd precut with the required number of poles.

- Tubular Screw Clamp
- Panel Mount or Free Float
- Housing Material: Polyamide 6.6
- Color: Opaque White

### FLAT BASE

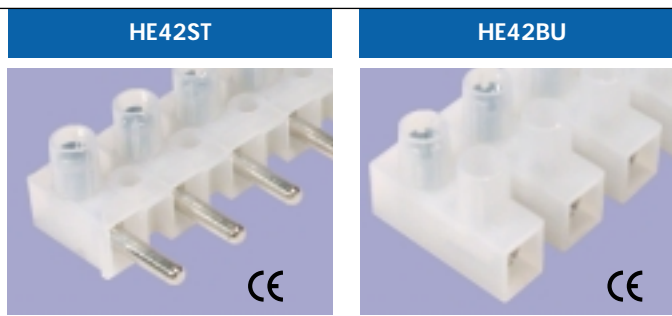


Flat Base

Flat Base


Pole Spacing	10 mm		10 mm	
Mounting Hole Diameter	3.5 mm		3.5 mm	
Stripping Length	3.6 mm		3.6 mm	
Approvals				
Wire Range	2.5-4mm <sup>2</sup>	24-10AWG	2.5-4mm <sup>2</sup>	24-10AWG
Voltage Rating	400V	300V	400V	300V
Current Rating	10A	20A	10A	20A
Torque	0.8Nm	7.2lb	0.8Nm	7.2lb

No. of Poles	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
2	HE42ST/02	100	HE42BU/02	100
3	HE42ST/03	100	HE42BU/03	100
4	HE42ST/04	100	HE42BU/04	100
5	HE42ST/05	100	HE42BU/05	100
6	HE42ST/06	50	HE42BU/06	50
7	HE42ST/07	50	HE42BU/07	50
8	HE42ST/08	50	HE42BU/08	50
9	HE42ST/09	50	HE42BU/09	50
10	HE42ST/10	50	HE42BU/10	50
11	HE42ST/11	50	HE42BU/11	50
12	HE42ST/12	50	HE42BU/12	50

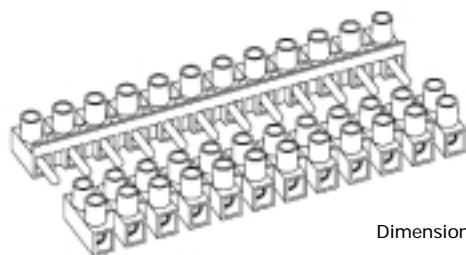

Dimensions mm

A = 10.0	J = 15.2
B = M3	K = 7.9
C = 6.4	L = 117
D = 3.6	M = 14.9
E = Ø3.5	N = 34.4
F = Ø5.7	O = 9.2
G = 10.0	P = 20
H = Ø3.5	Q = 14.4
I = 3.2	R = 7

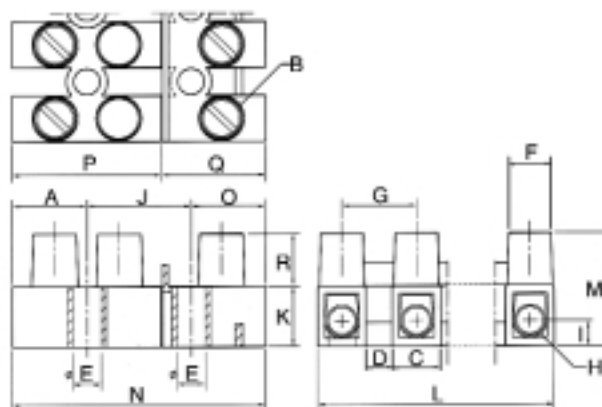

## STANDOFF FEET




Standoff feet



Standoff feet

Pole Spacing	10 mm		10 mm	
Mounting Hole Diameter	3.5 mm		3.5 mm	
Stripping Length	3.6 mm		3.6 mm	
Approvals				
Wire Range	2.5-4mm <sup>2</sup>	24-10AWG	2.5-4mm <sup>2</sup>	24-10AWG
Voltage Rating	400V	600V	400V	600V
Current Rating	10A	20A	10A	20A
Torque	0.8Nm	7.2lb	0.8Nm	7.2lb
<b>No. of Poles</b>	<b>Cat. No.</b>	<b>Std. Pk.</b>	<b>Cat. No.</b>	<b>Std. Pk.</b>
2	HE42SST/02	100	HE42SBU/02	100
3	HE42SST/03	100	HE42SBU/03	100
4	HE42SST/04	100	HE42SBU/04	100
5	HE42SST/05	100	HE42SBU/05	100
6	HE42SST/06	50	HE42SBU/06	50
7	HE42SST/07	50	HE42SBU/07	50
8	HE42SST/08	50	HE42SBU/08	50
9	HE42SST/09	50	HE42SBU/09	50
10	HE42SST/10	50	HE42SBU/10	50
11	HE42SST/11	50	HE42SBU/11	50
12	HE42SST/12	50	HE42SBU/12	50

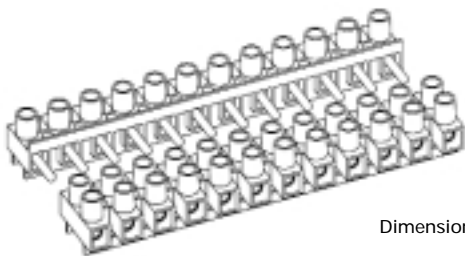

Dimensions mm

A = 10.0	J = 15.2
B = M3	K = 11.5
C = 6.4	L = 117
D = 3.6	M = 18.5
E = Ø3.5	N = 34.4
F = Ø5.7	O = 9.2
G = 10.0	P = 20
H = Ø3.5	Q = 14.4
I = 6.8	R = 7

