




FCI CONFIDENTIAL

FCI PART NO.	POWER TYPE	LENGTH "X"
10089743-Z0050YYLF	24V	500+25/-0
10089743-Z0100YYLF	24V	1000±15
10089743-Z0200YYLF	24V	2000±20
10089743-Z0300YYLF	24V	3000±25
10089743-Z0500YYLF	24V	5000±25

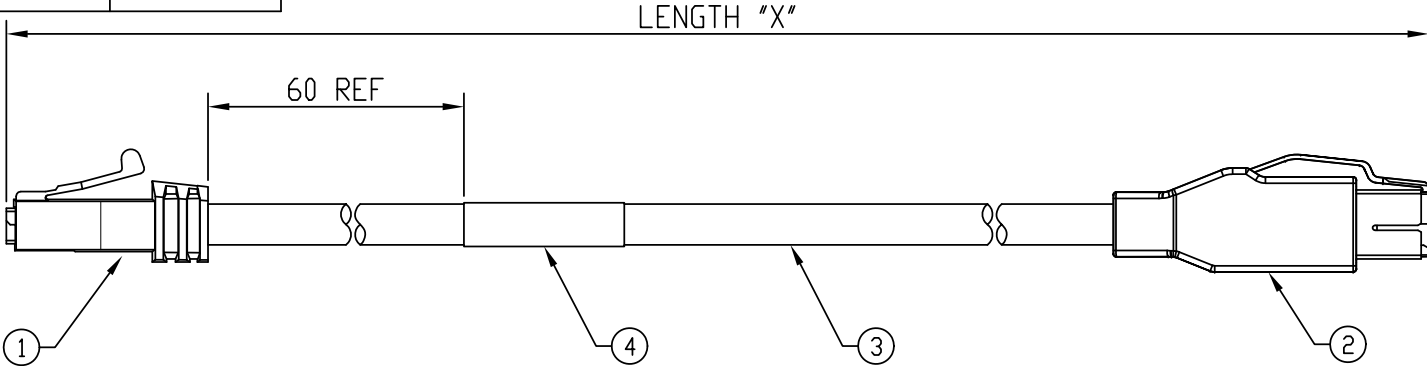

PIN ASSIGNMENT				
P1	SIGNAL NAME	WIRE COLOR	WIRE AWG	P2
8	VBUS (+5V)	RED	20	1
6	DATA -	WHITE	28	2
4	DATA +	GREEN	28	3
2	GND	BLACK	20	4
7	24V RETURN	BLUE	20	5
5	+24V	BROWN	20	6
3	+24V	ORANGE	20	7
1	24V RETURN	YELLOW	20	8
SHELL	FRAME GND	BRAID		SHELL

Mark with 10075076001 REV. proj_revision in area indicated by X....	rev	ecn no	dr	date
	A	N08-0120	ST	6/18/2008
	B	N08-0258	ST	11/28/2008
	C	ECN-CLX-N13469-1	ST	11/16/2012

Material	Spec ref	spec_ref	projection	MM
Mat code	surface	tolerance	ISO 406	← →
Heattreat	ISO 1302	ISO 1101	ISO 1101	
Plating/Finish	Dr	Sunny Tsai	6/17/2008	size
	Eng	Sunny Tsai	6/17/2008	A3
	Chr	Jackson Wang	6/17/2008	Scale
	Appr	Jackson Wang	6/17/2008	-
		Product family		CABLE ASS'Y
		Model Name		ECN
		Model Revision		REL Level

TOLERANCES UNLESS OTHERWISE SPECIFIED				
LINEAR				
ANGULAR	0°	±2°		

FCI	title	CABLE: USB+POWER(24V) TO 2X4 LATCH-N-LOK (ROHS)	dwg no	10089743	Rev.	C
Pro/E file	catalog no		CUSTOMER DWG	sheet 1 of 2		

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

