


1



2

3

4

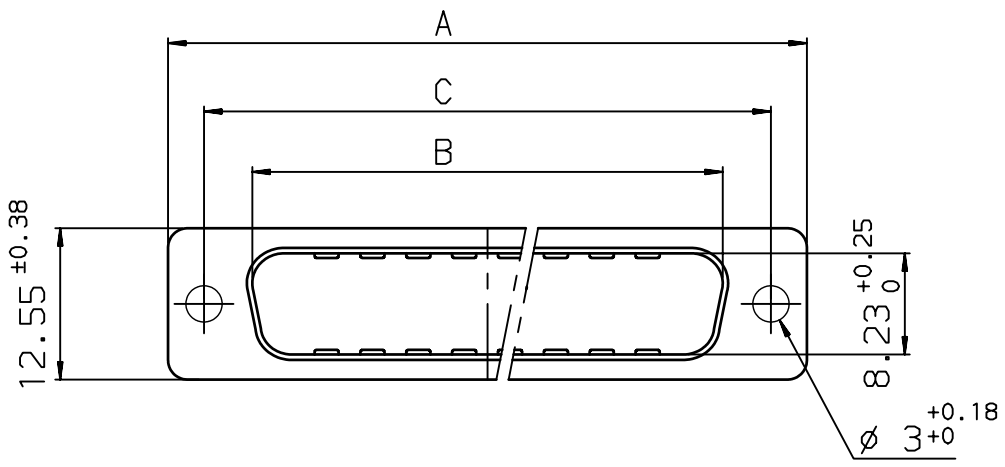

NOTE
Sealed caps IP 65 .

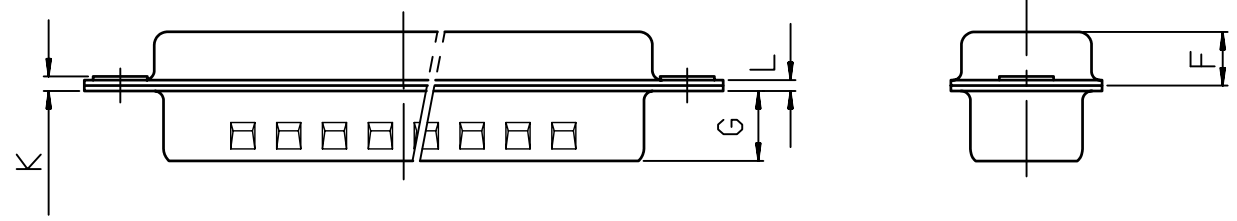

Copyright FCI. FCI

Shell size	Number of contacts	A ^{+0.76} ₀	B ^{+0.25} ₀	C ^{±0.12}	F ^{+0.13} _{-0.03}	G	K	L ^{+0.22} ₀	Part number
E	09	30.43	16.79	24.99	4.36	5.90 ^{+0.15} ₀	.00 ^{+0.30} ₀	0.80	8655-3138
A	15	38.76	25.12	33.32	4.36	5.90 ^{+0.15} ₀	.00 ^{+0.30} ₀	0.80	8655-3139
B	25	52.65	38.84	47.04	4.36	5.70 ^{+0.25} ₀	.00 ^{+0.30} ₀	0.80	8655-3140
C	37	68.94	55.30	63.50	4.36	5.70 ^{+0.25} ₀	.27 ^{+0.30} ₀	1.00	8655-3141

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection ⊕	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 3
0.XX' ±2'		0.XX	±0.1	ECN	LS09-0006
Dr BOUTTIER 1994/05/27		Chr LEGARE 1994/05/27		Appr LEGARE 1994/05/27	
D L506-0097 LGO 2006/07/28		E L509-0006 PCR 2009/01/08		Product family D-SUB Spec ref -	
FCj			title PINS METAL CAPS D SUB ACCESSORIES		Rev. E
catalog no			dwg no C01-8655-0651		sheet 1 of 1

PLATING
Yellow Chromate Cadmium 12μ over flash Nickel

REV F - 2006-04-17

1

2

3

4