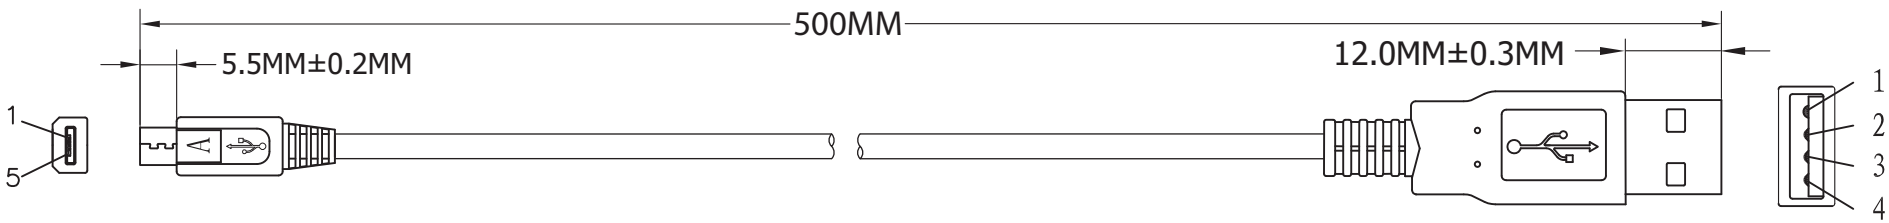

P1



P2

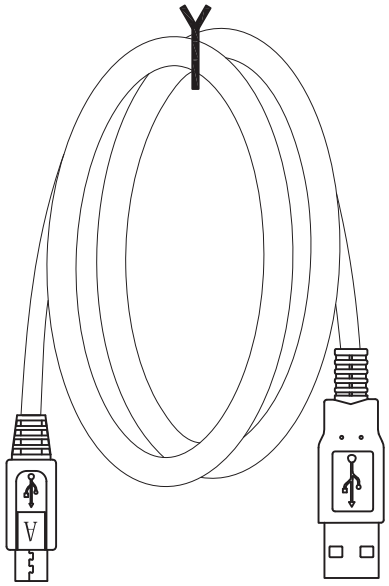

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4+5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

Material:

- Cable: USB2.0 UL 27725 [28AWG(7/0.1 2 T.C+AL)x1P+ 28AWG(7/0.12TC)x2C]+AEB(48B TC)
  - Jacket: Black
  - OD: 3.5MM
- Connector: Micro USB 5P A/M Solder Type
  - Shell: Nickel
  - Pin: G/F
  - Insulator Color: White
- Outer Jacket: Black PVC-50P

Electrical:

- 100% Open short & mis wire test
  Contact Resistance: 3Ω Max.
  Insulation Resistance: 20MΩ Min.
- Hi-Pot test: 300V DC

RoHS Complaint

Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.
AK67321-0.5-R

Title
USB2.0 Micro Connection Cable, 0.5 Meter
USB A Micro Male <=> USB A Male

Drawing No.

rev00

Replace

Sheet