

Isolierkörpermaterial
PPS, UL94V-0

Kontaktmaterial
Phosphorbronze

Kontaktfläche
Ni, Au

Kontaktwiderstand
100mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
Schaltend
25mA
In Ruhe
100mA

Betriebstemperatur
-25°C - +70°C

Betriebsspannung
24V DC

Prüfspannung
500V AC

Schiebekraft
800g max

Verpackung
Stangenverpackung

Insulator material
PPS, UL94V-0

Contact material
Phosphor bronze

Plating
Ni, Au

Contact resistance
100mΩ max

Insulation resistance
1000MΩ min

Current rating
Switching
25mA
Non-switching
100mA

Operating temperature
-25°C - +70°C



Operating voltage
24V DC

Test voltage
500V AC

Operating force
800g max

Packing
Tube packing

| Dimensions | |
|-----------------|------|
| No. of contacts | A |
| 2 | 6.7 |
| 3 | 9.2 |
| 4 | 11.7 |
| 5 | 14.2 |
| 6 | 16.7 |
| 7 | 19.2 |
| 8 | 21.7 |
| 10 | 26.7 |

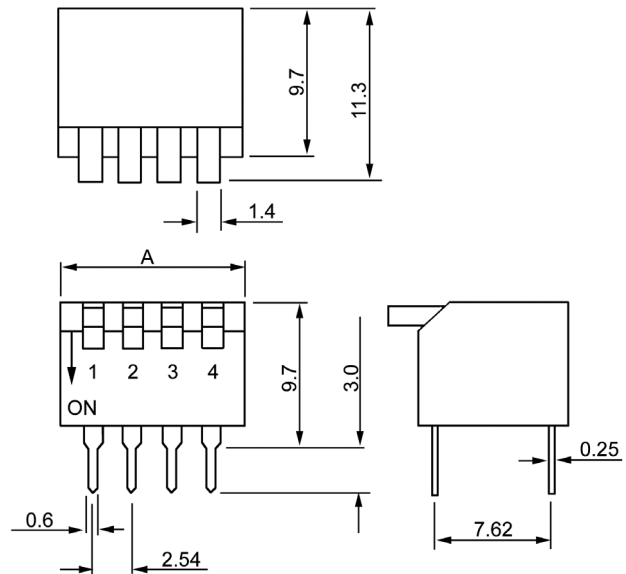

Bestellcode / Ordercode

Polzahl

02 / 03 / 04* / 05 / 06* /
07 / 08* / 10*

No. of contacts

02 / 03 / 04* / 05 / 06* /
07 / 08* / 10*

AD - EPG 1 xx A

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option

* Standard
* Standard