



WIRING DIAGRAM

Pole	A ±0,20(mm)
01	2,31
02	3,58
03	4,85
04	6,12
05	7,39
06	8,66
08	11,20
10	13,74
12	16,28

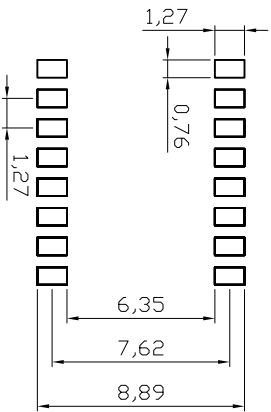

SMD SOLDERING PAD

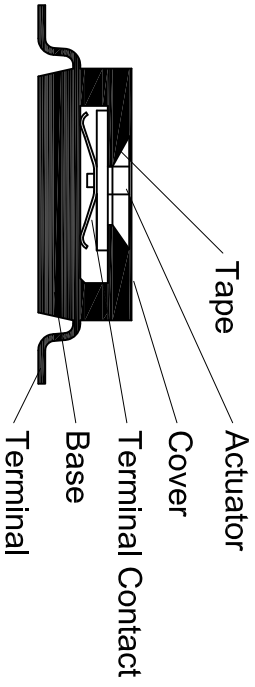

Scale 2:1

Part Name	Material	Finish
Base	PPS UL94-V0	Black
Cover	PPS UL94-V0	Black
Actuator	PA46 UL94-V0	White
Movable Contact	Copper Alloy	Gold Plated
Terminal Contact	Copper Alloy	Gold Plated
Terminal	Copper Alloy	Gold Plated
Tape	Polyimide Film	Amber

Scale	1:1
TOLERANCE	
0,1~1,0	±0,05
1,0~5,0	±0,10
5,0~10	±0,20
10~20	±0,30
DIM	TOL
X. °	±1°
Angle	TOL

Id.	Modification	Date	Name
①	Drawn	01.08.2006	Helwig
②	Change of production plant	25.02.2009	Rate

Date	Name
25.02.2009	Rate
25.02.2009	Helwig

RoHS compliant



Customer-No.
ASSMANN WSW-No.
A-DSHP-XX

Drawing-No.
ASS 0996 CO

rev02

Replace

1 OF 2

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

1

2

3

4

5

6

7

