

Product discontinuation notification

PDN13-16 KSA

C&K components

C&K components SAS – 2 Rue Berthollet B.P. 359 F-39105 Dole Cedex - FRANCE
Telephone :+33 (0)3 84 72 94 03 - Facsimile: +33 (0)3 84 79 20 39 – www.ck-components.com

Document subject to change without prior notice
Diffusion: no restriction

PDN13-16 KSA Rev.A –04/10/2013

Page 1/5

Document revision

Revision	Date	Description	Author
A	04-Oct -2013	Creation	Eric GRANGE

Summary

1. Purpose.....	4
2. Discontinuation details.....	4
2.1 P/N affected	4
2.2 Reason for discontinuation.....	4
3. Replacement.....	4
4. Application	4
4.1 Time frame	4
4.2 Sales conditions	5
5. Acknowledgement.....	5

1. Purpose

The purpose of this notification is to announce the end of availability of the KSB and KSFR products and derivatives.

2. Discontinuation details

2.1 P/N affected

- Ksb0m110 Lft / Y33A11025FP LFT
- Ksb0m410 Lft / Y33A41025FP LFT
- Ksb0m430 Lft / Y33A43025FP LFT

- Ksfr0m411 Lft / Y33A411R5FP LFT

2.2 Reason for discontinuation

Production volumes level are not justifying the specific tool maintenance.

3. Replacement

The following replacement is proposed

- Ksb0m110 Lft replaced by KSF0M211 LFT
- Ksb0m410 Lft replaced by KSF0M411 LFT
- Ksb0m430 Lft replaced by KSF0M431 LFT

- Ksfr0m411 Lft : no replacement

The replacement impact is described below. For any further information, please refer to drawings and specification shared in appendix.

- Dimensional: height 2.6mm instead of 2.1 mm
- Electrical and environmental features: no impact
- Mechanical features: refer to the following table

C&K P/N	Force (N)	Return force min (N)	Travel (mm)	Life min (K cycles)
KSF0M211 LFT / KSB0M011 LFT	1.00-2.00/1.20-2.00	0.40/0.40	0.20-0.30/0.17-0.27	100/100
KSF0M411 LFT / KSB0M411 LFT	2.25/3.75/2.25-3.75	0.40/0.40	0.20-0.30/0.2-0.3	100/100
KSF0M431 LFT / KSB0M431 LFT	2.25-3.75/2.25-3.75	0.40/0.40	0.20-0.30/0.2-0.3	100/100

For any technical question concerning replacement, including sample request, please ask to you sales representative.

4. Application

4.1 Time frame

PDN notification: October 4th 2013*

Customer acknowledgement: November 4th 2013

Last time buy: April 4th 2014

Discontinuation effective May 4th 2014

4.2 *Sales conditions*

In case of replacement, please check new sales conditions with your C&K sales representative


5. Acknowledgement

We kindly asking you to acknowledge this information no later than July 26th 2013

Annex : Technical documentation related to replacement:





(refer to following pages)

ECR-2806	Mise a jour codes	20/08/2008	CD
A	Remplacement PCF, suppression marquage 1 et 2, suppression de la note, modif tolerance sur cote 85 et 96 ± 0.2 -0.3 et 3.5 ± 0.15 -0.3, ajout dim critique sur cote 2.6, ajout schema contact sur CU	22/02/2010	GP



PIED DE LAVAGE


Recommended shape for actuator

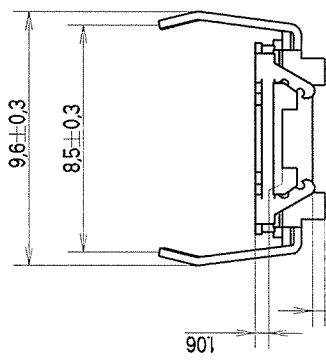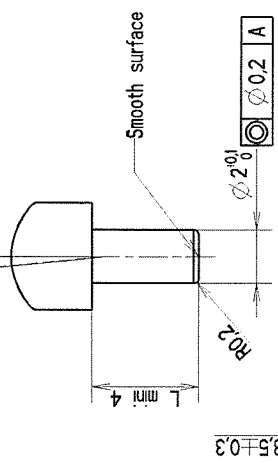

SCALE 5

PRODUCT NUMBER	DESIGNATION
Y33 A41 IRS FP LFT	KSF R 411 LFT

SYSTEM CONFIDENTIAL

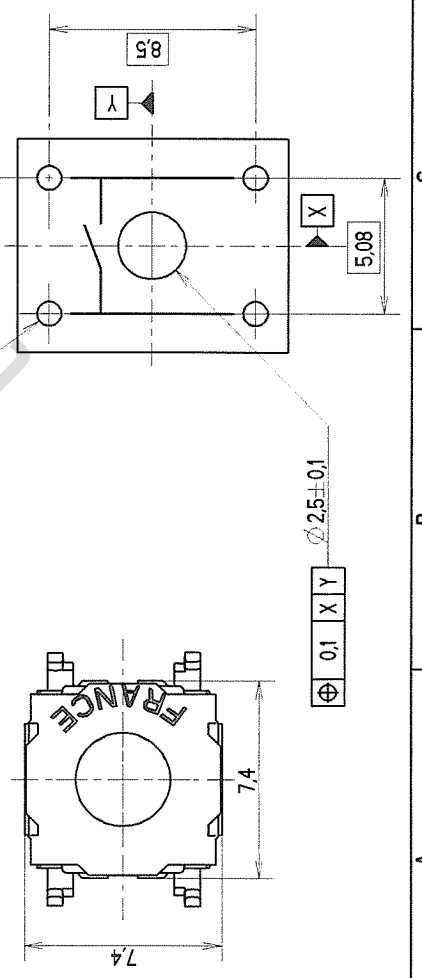

Recommended PCB (component side)



CREATE BY	MILLEREAU.S	DATE	05-10-2005	LINEAR TOLERANCE	± 0.1	ANGULAR TOLERANCE	± 1°	CRITICAL DIMENSIONS	1
CHECKED BY	PAILLE.V	DATE		PRO/E	0	LANGUAGE		SFC DIMENSIONS	
APPROVED BY	KUBAT.L	DATE	27/03/2010	REPLACE					
G&K C&K Components		KSF R LFT		PART DESCRIPTION					
BP 359 - 39105 Dole - FRANCE		A3 1 / 1		SIZE		SHEET		PART NUMBER	
		33 M07 003 FP		REV		A		E	

A



B

C


1

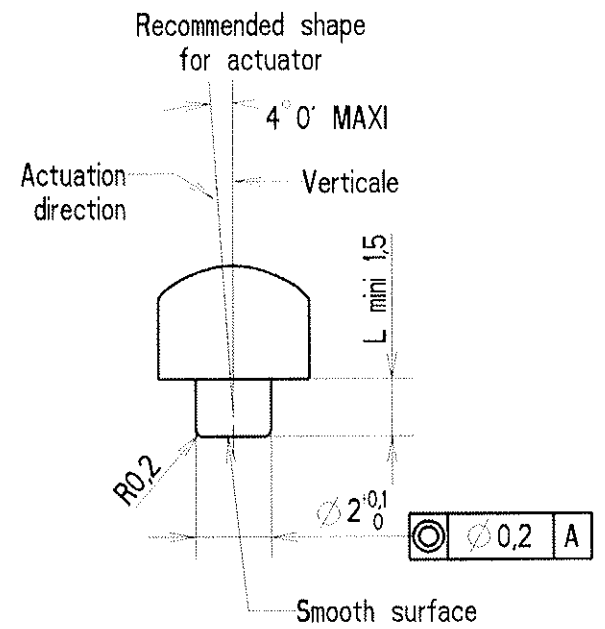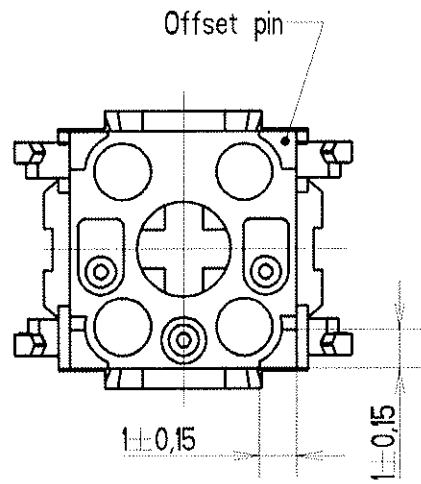


2

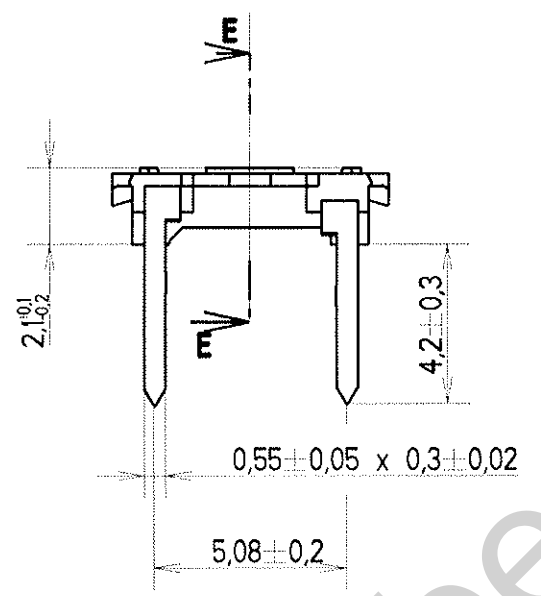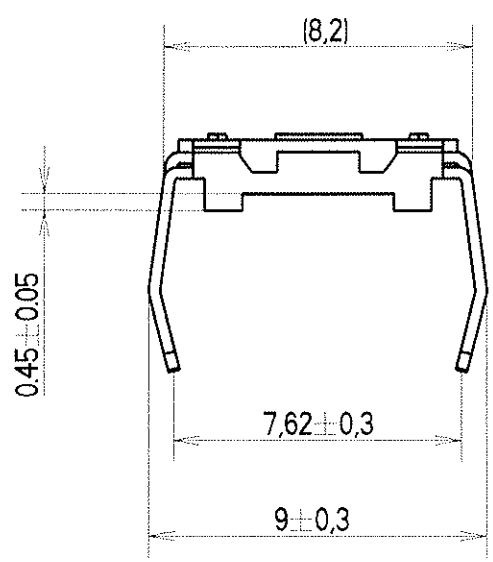

3

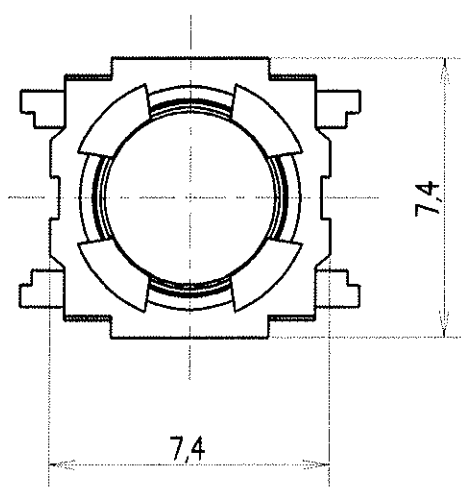

Recommended PCB (component side)

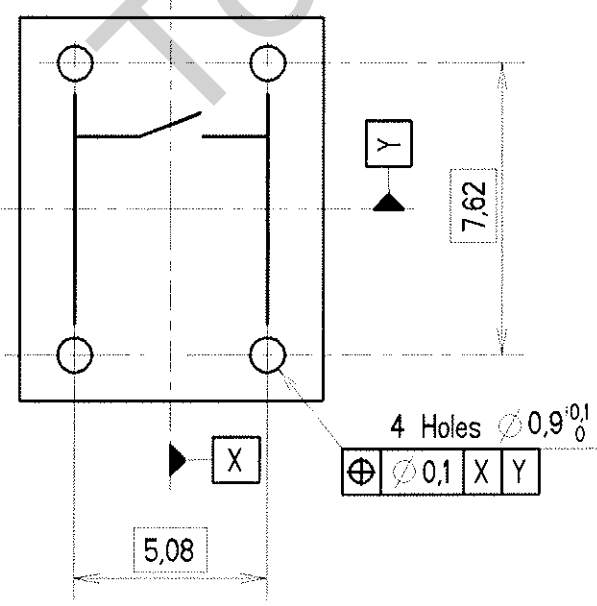

CE PLAN EST LA PROPRIETE DE C&A COMPONENTS SAS ET NE PEUT ETRE REPRODUIT OU COMMUNIQUE SANS SON AUTORISATION

A

B

C



PRODUCT SPECIFICATION

KSB LFT

Ref. / PS-KSB-176


Page 1 / 6

ISSUE 1 – Rev. A: JUNE 2008

Approvals:

Laurent Kubat
Engineering Manager

Date

 18/06/08

Jean Profeta
Product Quality Manager

Daniel Pequegnot
Laboratory Manager

Eric Grange
Product Manager

J rome Brochot
Quality Director

Note

This specification, attached documents and attached drawings cannot be communicated to anybody without written agreement of C&K.



PRODUCT SPECIFICATION

June 2008

KSB LFT

Issue 1-rev.A

Ref. / PS-KSB-176

Page 2 / 6

Revision record :

Revision	Date	Comments
Issue 1	March 7 th , 2007	Creation
Issue 1 – rev. A	June 3 rd , 2008	Update : <ul style="list-style-type: none">• Logo C&K (according to ECR 1399)• Operating life: Weibull data suppressed. (according to ECR 1461)• UL data suppressed (according to ECR 2324)

To be obsolete

SUMMARY

- 1. Description / Main Features**
- 2. Construction**
- 3. Electrical data**
- 4. Mechanical data**
- 5. Physical data**
- 6. Operating environment**
- 7. Additional data : storage and handling environment**
- 8. Additional data : process environment**
- 9. Applicable norms**

To be obsoleted

KSB LFT

Ref. / PS-KSB-176

1 - Description



The KSB LFT (Lead Free Tin) is a miniature tact switch with single pole, single throw and normally open contact of the KSA family designed for automatic or manual insertion.

Main Features

- Without actuator
- Without top sealing
- Terminal plating: LFT (lead free tin)
- ROHS Compliance
- Compatible with lead free process (wave or hand soldering only).
- Insertion:
 - M: manual
 - A : automatic
 - V : vertical
- Available with cambered terminals to ensure self-retention on the printed circuit board in manual insertion (M version), or with straight terminals for use in automatic insertion machines (A version).
- Marking :
 - On the packaging box :
 - Manufacturer's symbol
 - Component designation
 - EIA date code

2 - Construction

Function	Momentary action
Contact type	SPST, Normally Open
Terminals	Through hole

3 - Electrical data

	Contact plating : Ag or Au
Maximum power	<ul style="list-style-type: none"> ▪ KSB Ag : 1.0 VA ▪ KSB Au : 0.2 VA
Min/max voltage	20 mVdc – 32 Vdc
Min/max current	<ul style="list-style-type: none"> ▪ KSB Ag : 1.0 mA – 50 mA ▪ KSB Au : 1.0 mA – 10 mA
Dielectric strength	≥ 250 Vrms
Contact resistance	≤ 100 mΩ
Insulation resistance	Initial measurement : ≥ 1 GΩ After damp heat : ≥ 10 MΩ
Bounce time	≤ 1 ms

4 - Mechanical data (note: ▼ critical product characteristics)

Mechanical data of the product before soldering process. Variations of these characteristics can be observed after soldering process.

Switching force (Fa) ▼	See table page 6
Tactile feeling (Δ%) ▼	See table page 6
Return force (Frr) ▼	See table page 6
Electrical travel (Te)	See table page 6
Simultaneity	≤ 0.05 mm

5 - Physical data

Dimensions & layout	According to drawing (drawing N° on the table page 6)
Mass	0.25 g ± 0.1

6 - Operating environment

Operating temperatures	- 40°C / + 85°C
Relative humidity	90 to 96 % According to NF EN 60068-2-30
Operating life	100 Kcycles min for all versions. Some versions existing with extended life time.
Vibrations	10-500 Hz / 10 g / 3 axis No discontinuity > 1μs According to NF EN 60068-2-6
Mechanical shocks	½ sinusoidal / 50 g / 11 ms 3 shocks in each direction of the 3 axis No discontinuity > 1μs According to NF EN 60068-2-27
Overload	40 N max

KSB LFT

Issue 1-rev.A

Ref. / PS-KSB-176




Page 5 / 6

Flowing mixed gas corrosion test - only for gold versions -	Gas composition :
	- H ₂ S : 0.01 ± 0.005 ppm
	- NO ₂ : 0.2 ± 0.02 ppm
	- Cl ₂ : 0.01 ± 0.005 ppm
	- SO ₂ : 0.2 ± 0.02 ppm
	Temperature: 25°C / HR: 75% / Duration: 10 days.
	According to NF EN 60068-2-60 method 4
7 - Additional data : storage and handling environment	
Packaging conditions	Delivered in packaging tubes of 65 pieces for automatic insertion, or in boxes of 500 pieces for manual insertion.
Transport conditions	According to specification NF H00-060
Storage temperatures	- 40°C (10 days) / + 85°C (4 days)
8 - Additional data : process environment	
Soldering process	Single or double wave soldering process According to lead free process (C&K Procedure : PS-LF-002)
Washing process	Not compatible
IP	IP 40
Shear test (switch/PCB)	10 N
9 - Applicable norms	
Testing procedure (C&K spec)	Proc-essai 16 <i>Except requirements included in this spec.</i>
Legal norm (EHS)	C&K procedure




TO BE OBSOLETE

Designation	Product N°	Drawing N°	Switching force Fa (N)	Tactile feeling (N)	Return force Frr (N)	Electrical travel Te (mm)	Contact plating
KSB 0M LFT	KSB 0M 110 LFT	CU 33 M02 005 FP	1.20 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.40	0.22 ± 0.05	Silver
	KSB 0M 130 LFT						Gold
	KSB 0M 410 LFT						Silver
	KSB 0M 430 LFT						Gold
KSB 0A LFT	KSB 0A 130 LFT	CU 33 M02 103 FP	1.20 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.40	0.22 ± 0.05	Gold
	KSB 0A 410 LFT						Silver
KSB 0V LFT	KSB 0V 110 LFT	CU 33 M02 203 FP	1.20 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.40	0.22 ± 0.05	Silver
	KSB 0V 410 LFT						Silver

ECR-2606	Amulation codes 33 A91 155 FP et 33 A93 155 FP	22/08/2008	CD
ECR-4952	Remplacement PCF , ajout schema contact sur CU , suppression des marquages 1 et 2 , suppression de la note , ajout code Y33 A91 155 FP	19/02/2010	GP

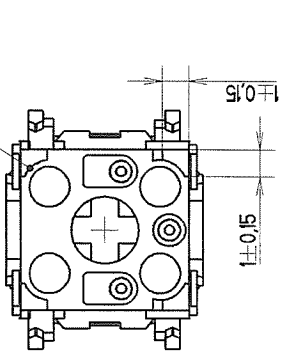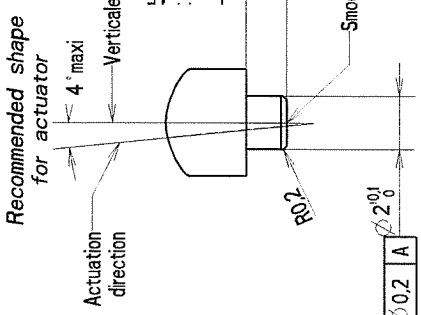



SECTION A-A

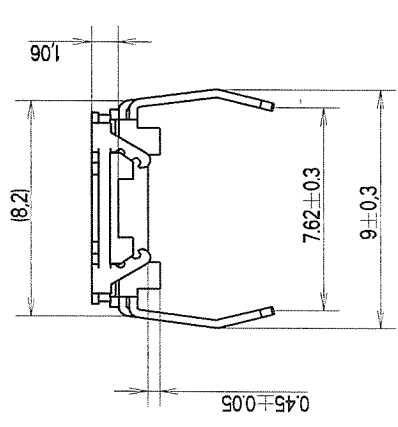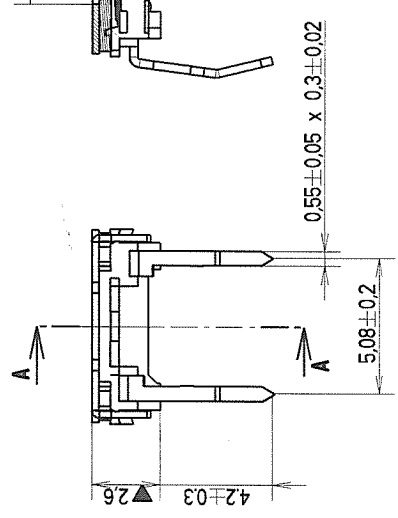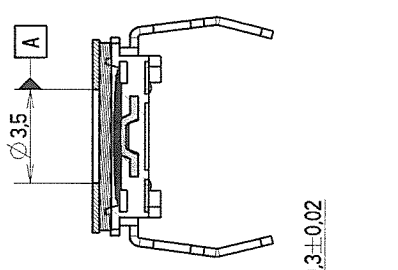

CODE PRODUIT	DESIGNATION
Y33 A21 155 FP LFT	KSF OM 211 LFT
Y33 A31 155 FP LFT	KSF OM 311 LFT
Y33 A33 155 FP LFT	KSF OM 331 LFT
Y33 A41 155 FP LFT	KSF OM 411 LFT
Y33 A43 155 FP LFT	KSF OM 431 LFT
Y33 A51 155 FP LFT	KSF OM 511 LFT
Y33 A53 155 FP LFT	KSF OM 531 LFT
Y33 A91 155 FP LFT	KSF OM 911 LFT

SYSTEM CONFIDENTIAL

Recommended PCB (component side)

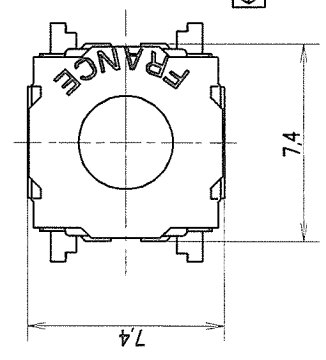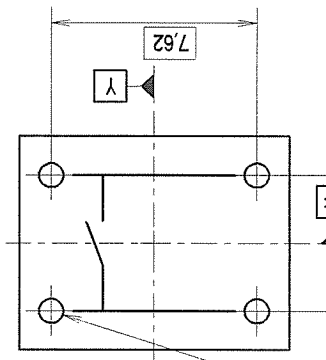

CREATE BY	CERISE L	DATE	05-10-2005	LINEAR TOLERANCE	± 0.1	ANGULAR TOLERANCE	± 1°	CRITICAL DIMENSIONS	1
CHECKED BY	ESTEBAN B	DATE		SFC DIMENSIONS		PROJE	0	LANGAGE	
APPROVED BY	KUBAT L	DATE	03/10/2010	REPLACE					
C&K Components		BP 359 - 39105 Dole - FRANCE -		PART DESCRIPTION		KSF OM LFT			
SIZE		A3 1 / 1		SCALE		5,000			
SHEET		1 / 1		PART NUMBER		33 M05 005 FP			
REV		A		REV		A			



PRODUCT SPECIFICATION

August 2010

KSF LFT

rev. B

Ref. / PS-KSF-174

Page 1 / 4

Approvals:

Laurent Kubat Engineering Manager	Date
---	------

Revision record:

Revision	Date	Comments
-	Sept. 17 th , 2006	Creation
Rev. A	Nov. 13 th , 2007	Update: <ul style="list-style-type: none">• KSF1M911LFT & KSF1M931LFT versions suppressed. (according to ECR N°1560)
Rev. B	August 17 th , 2010	Update : <ul style="list-style-type: none">• Table page 4 (according to ECR 2606)• UL data suppressed (according to ECR 2324)

Summary:

1. Description / Main Features
2. Construction
3. Electrical data
4. Mechanical data
5. Physical data
6. Operating environment
7. Additional data : storage and handling environment
8. Additional data : process environment
9. Applicable norms

Note: This specification, attached documents and attached drawings cannot be communicated to anybody without written agreement of C&K.

KSF LFT

rev. B

Ref. / PS-KSF-174

Page 2 / 4

1 - Description



The KSF LFT (Lead Free Tin) is a miniature tact switch with single pole, single throw and normally open contact of the KSA family designed for automatic or manual insertion.

Main Features

- Without actuator
- With top sealing
- Good tactile feedback
- Terminal plating: LFT (lead free tin)
- ROHS Compliance
- Compatible with lead free process (wave or hand soldering only).
- Insertion:
 - M: manual
 - A : automatic
- Available with cambered terminals to ensure self-retention on the printed circuit board in manual insertion (M version), or with straight terminals for use in automatic insertion machines (A version).
- Optional : ground terminal
- Marking :
 - On the packaging box :
 - Manufacturer's symbol
 - Component designation
 - EIA date code

2 - Construction

Function	Momentary action
Contact type	SPST, Normally Open
Terminals	Through hole

3 - Electrical data

	Contact plating : Ag or Au
Maximum power	<ul style="list-style-type: none"> ▪ KSF Ag : 1.0 VA ▪ KSF Au : 0.2 VA
Min/max voltage	20 mVdc – 32 Vdc
Min/max current	<ul style="list-style-type: none"> ▪ KSF Ag : 1.0 mA – 50 mA ▪ KSF Au : 1.0 mA – 10 mA
Dielectric strength	≥ 250 Vrms
Contact resistance	≤ 100 mΩ
Insulation resistance	Initial measurement : ≥ 1 GΩ After damp heat : ≥ 10 MΩ
Bounce time	≤ 1 ms

4 - Mechanical data (note: ▼ critical product characteristics)

Mechanical data of the product before soldering process. Variations of these characteristics can be observed after soldering process.

Switching force (Fa) ▼	See table page 4
Tactile feeling (Δ) ▼	See table page 4
Return force (Frr) ▼	See table page 4
Electrical travel (Te)	See table page 4
Simultaneity	≤ 0.05 mm

5 - Physical data

Dimensions & layout	According to drawing (drawing N° on the table page 4)
Mass	0.25 g ± 0.1

6 - Operating environment

Operating temperatures	- 40°C / + 85°C
Relative humidity	90 to 96 % According to NF EN 60068-2-30
Operating life	100 Kcycles min for all versions. <i>Some versions existing with extended life time.</i>
Vibrations	10-500 Hz / 10 g / 3 axis No discontinuity > 1μs According to NF EN 60068-2-6
Mechanical shocks	½ sinusoidal / 50 g / 11 ms 3 shocks in each direction of the 3 axis No discontinuity > 1μs According to NF EN 60068-2-27
Overload	40 N max

KSF LFT**rev. B****Ref. / PS-KSF-174****Page 3 / 4**

Flowing mixed gas corrosion test <i>- only for gold versions -</i>	Gas composition :
	- H ₂ S : 0.01 ± 0.005 ppm
	- NO ₂ : 0.2 ± 0.02 ppm
	- Cl ₂ : 0.01 ± 0.005 ppm
	- SO ₂ : 0.2 ± 0.02 ppm
	Temperature: 25°C / HR: 75% / Duration: 10 days.
	According to NF EN 60068-2-60 method 4
7 - Additional data : storage and handling environment	
Packaging conditions	Delivered in packaging tubes of 65 pieces for automatic insertion, or in boxes of 500 pieces for manual insertion.
Transport conditions	According to specification NF H00-060
Storage temperatures	- 40°C (10 days) / + 85°C (4 days)
8 - Additional data : process environment	
Soldering process	Single or double wave soldering process According to lead free process (C&K Procedure : PS-LF-002)
Washing process	Not compatible
IP	IP 60
Shear test (switch/PCB)	10 N
9 - Applicable norms	
Testing procedure (C&K spec)	Proc-essai 16 <i>Except requirements included in this spec.</i>
Legal norm (EHS)	C&K procedure

Designation	Product N°	Drawing N°	Switching force Fa (N)	Tactile feeling (N)	Return force Frr (N)	Electrical travel Te (mm)	Contact plating		
KSF OM LFT	KSF OM 211 LFT	Y 33 A21 155 FP LFT	CU 33 M05 005 FP	1.00 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.4	0.25 ± 0.10	Silver	
	KSF OM 311 LFT	Y 33 A31 155 FP LFT		1.40 N ≤ Fa ≤ 2.40 N	≥ 0.35	≥ 0.4	0.25 ± 0.10	Silver	
	KSF OM 331 LFT	Y 33 A33 155 FP LFT		1.40 N ≤ Fa ≤ 2.40 N	≥ 0.35	≥ 0.4	0.25 ± 0.10	Gold	
	KSF OM 411 LFT	Y 33 A41 155 FP LFT		2.25 N ≤ Fa ≤ 3.75 N	≥ 0.8	≥ 1.0	0.25 ± 0.10	Silver	
	KSF OM 431 LFT	Y 33 A43 155 FP LFT		2.25 N ≤ Fa ≤ 3.75 N	≥ 0.8	≥ 1.0	0.25 ± 0.10	Gold	
	KSF OM 511 LFT	Y 33 A51 155 FP LFT		4.20 N ≤ Fa ≤ 6.25 N	≥ 1.5	≥ 1.8	0.25 ± 0.10	Silver	
	KSF OM 531 LFT	Y 33 A53 155 FP LFT		4.20 N ≤ Fa ≤ 6.25 N	≥ 1.5	≥ 1.8	0.25 ± 0.10	Gold	
	KSF OM 911 LFT	Y 33 A91 155 FP LFT		2.30 N ≤ Fa ≤ 3.90 N	≥ 1	≥ 0.8	0.25 ± 0.10	Silver	
	KSF 1M LFT	Y 33 A21 156 FP LFT		CU 33 M05 006 FP	1.00 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.4	0.25 ± 0.10	Silver
	KSF 0A LFT	KSF 0A 211 LFT		Y 33 A21 151 FP LFT	CU 33 M05 111 FP	1.00 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.4	0.25 ± 0.10
KSF 0A 431 LFT		Y 33 A43 151 FP LFT	2.45 N ≤ Fa ≤ 4.10 N	≥ 0.8		≥ 1.0	0.25 ± 0.10	Gold	
KSF 0A 511 LFT		Y 33 A51 151 FP LFT	4.20 N ≤ Fa ≤ 6.25 N	≥ 1.5		≥ 1.8	0.25 ± 0.10	Silver	
KSF CCM LFT 2 short 90° connexions	KSF 211 CCM LFT	Y 33 A21 157 FP LFT	CU 33 M05 113 FP	1.00 N ≤ Fa ≤ 2.00 N	≥ 0.35	≥ 0.4	0.25 ± 0.10	Silver	
	KSF 411 CCM LFT	Y 33 A41 157 FP LFT		2.25 N ≤ Fa ≤ 3.75 N	≥ 0.8	≥ 1.0	0.25 ± 0.10	Silver	
	KSF 711 CCM LFT	Y 33 A71 157 FP LFT		2.30 N ≤ Fa ≤ 3.90 N	1.4 ± 0.6	≥ 1.1	0.25 ± 0.10	Silver	
KSFR LFT	KSFR 411 LFT	Y 33 A41 1R5 FP LFT	CU 33 M07 003 FP	2.25 N ≤ Fa ≤ 3.75 N	≥ 0.80	≥ 1.0	0.25 ± 0.10	Silver	