


# General Purpose Plastic Rectifier

**COMCHIP**   
www.comchiptech.com

## 1N4001 thru 1N4007


Reverse Voltage: 50 to 1000V

Forward Current: 1.0A

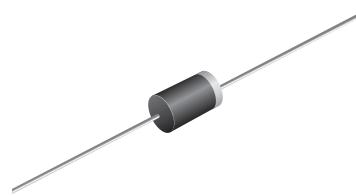

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low reverse leakage
- High forward surge capability
- High temperature soldering guaranteed: 350°C/10 Seconds, 0.375" (9.5mm) lead length
- Guardring for overvoltage protection

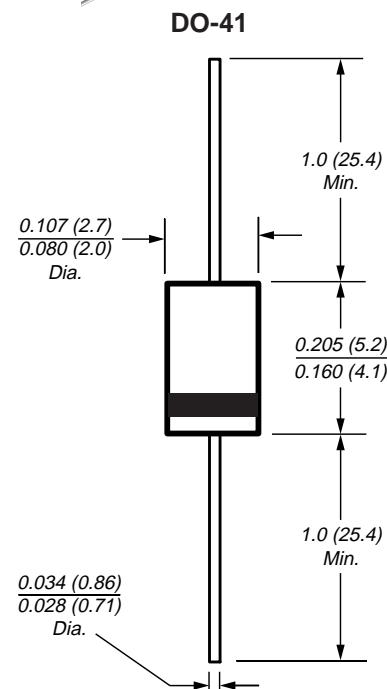

Dimensions in inches and (millimeters)

### Mechanical Data

- Case: JEDEC DO-41 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012 oz., 0.3 g
- Weight: 0.34 g

**Maximum Ratings & Thermal Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symb.	1N 4001	1N 4002	1N 4003	1N 4004	1N 4005	1N 4006	1N 4007	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
* Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
* Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
* Maximum average forward rectified current 0.375" (9.5mm) lead length at T <sub>A</sub> = 75°C	I <sub>F(AV)</sub>					1.0			A
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T <sub>A</sub> = 75°C	I <sub>FSM</sub>				30				A
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length T <sub>L</sub> = 75°C	I <sub>R(AV)</sub>			30					µA
Typical thermal resistance <sup>(1)</sup>	R <sub>θJA</sub> R <sub>θJL</sub>			50		25			°C/W
* Maximum DC blocking voltage temperature	T <sub>A</sub>			+150					V
* Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>			-50 to +175					°C

**Electrical Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.1	V
* Maximum DC reverse current at rated DC blocking voltage	T <sub>A</sub> = 25°C T <sub>A</sub> = 125°C	I <sub>R</sub> 5.0 50	µA
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	15	pF

Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted \*JEDEC registered values

# Schottky Barrier Rectifier

**COMCHIP**  
www.comchiptech.com

Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

