


15492.2

ZPRC 6-12-24V AC/DC

ZPRC 6-12-24V AC/DC

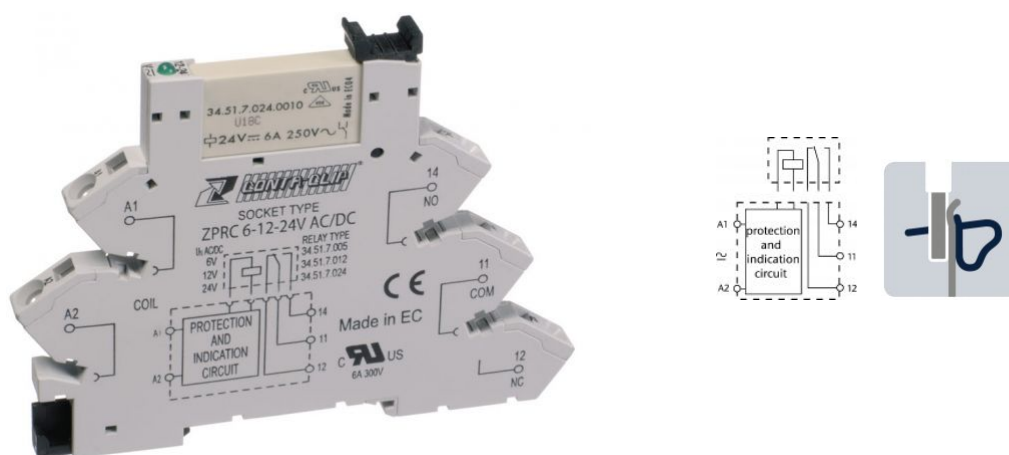

Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 6, 12 or 24 VAC/DC

## Business data

Product description	Relay socket base with tension-spring connection
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	30.2
Weight per piece (including packaging)	32.27
Unit of weight	G
Customs number	85369010
Country of origin	EEC

**15492.2**

**ZPRC 6-12-24V AC/DC**

**ZPRC 6-12-24V AC/DC**

## Technical Data

---

### Dimensions

---

Length	93 mm
Width	6.2 mm
Height TS 35 / 7.5 with BA	79.9 mm

### Ratings

---

Rated voltage Un	6-12-24 VAC/DC
Overvoltage category	III
Contamination degree	3

### Connection data

---

Connection principle	Tension-spring connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Stripping length	10 mm

**15492.2**

**ZPRC 6-12-24V AC/DC**

**ZPRC 6-12-24V AC/DC**

## Technical Data

---

### Output data

---

Switching voltage / switching voltage max.	250 / 400 VAC
--	---------------

Contact configuration	1 CO contact
-----------------------	--------------

### Materials

---

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	70 °C
---------------------------	-------

### Further technical data

---

Protection	IP20
------------	------

Status display	✓
----------------	---

**15492.2**

**ZPRC 6-12-24V AC/DC**

**ZPRC 6-12-24V AC/DC**

## Approvals

---

## Standards and regulations

---

CE compliant

✓

15492.2

ZPRC 6-12-24V AC/DC

ZPRC 6-12-24V AC/DC

## Media

---

