


15494.2

ZPRC 6-12-24V DC

ZPRC 6-12-24V DC

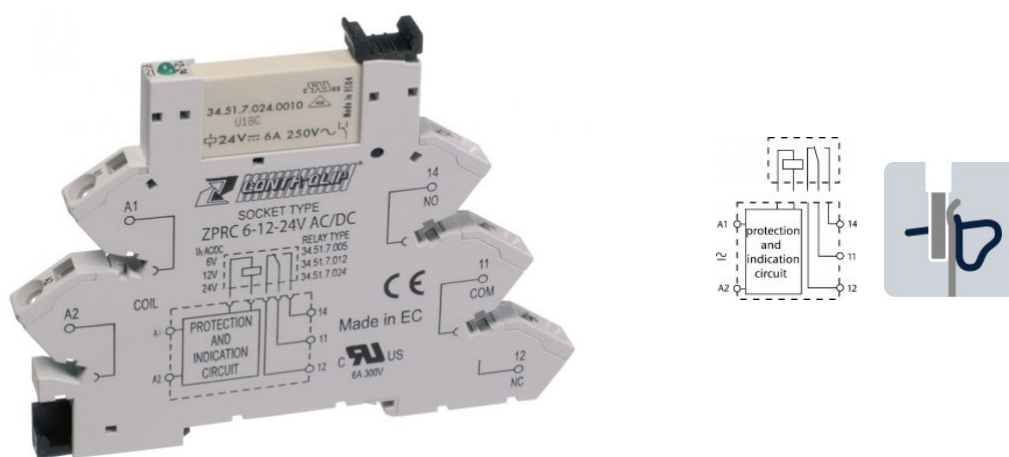

Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 6, 12 or 24 VDC

Business data

| | |
|--------------------------------------------|--------------------------------------------------|
| Product description | Relay socket base with tension-spring connection |
| Packaging unit | 10 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 29.9 |
| Weight per piece (including packaging) | 31.85 |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | EEC |

15494.2

ZPRC 6-12-24V DC

ZPRC 6-12-24V DC

Technical Data

Dimensions

| | |
|----------------------------|---------|
| Length | 93 mm |
| Width | 6.2 mm |
| Height TS 35 / 7.5 with BA | 79.9 mm |

Ratings

| | |
|----------------------|-------------|
| Rated voltage Un | 6-12-24 VDC |
| Overvoltage category | III |
| Contamination degree | 3 |

Connection data

| | |
|----------------------------------------------|---------------------------|
| Connection principle | Tension-spring connection |
| Wire cross-section single core (rigid), min. | 0.2 mm ² |
| Wire cross-section single-core (rigid), max. | 2.5 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Stripping length | 10 mm |

15494.2

ZPRC 6-12-24V DC

ZPRC 6-12-24V DC

Technical Data

Output data

| | |
|--------------------------------------------|---------------|
| Switching voltage / switching voltage max. | 250 / 400 VAC |
|--------------------------------------------|---------------|

| | |
|-----------------------|--------------|
| Contact configuration | 1 CO contact |
|-----------------------|--------------|

Materials

| | |
|---------------------------|--------|
| Working temperature, min. | -40 °C |
|---------------------------|--------|

| | |
|---------------------------|-------|
| Working temperature, max. | 70 °C |
|---------------------------|-------|

Further technical data

| | |
|------------|------|
| Protection | IP20 |
|------------|------|

| | |
|----------------|---|
| Status display | ✓ |
|----------------|---|

| | |
|------------------|---|
| Free-wheel diode | ✓ |
|------------------|---|

Datasheet



15494.2

ZPRC 6-12-24V DC

ZPRC 6-12-24V DC

Approvals

Standards and regulations

CE compliant

✓

15494.2

ZPRC 6-12-24V DC

ZPRC 6-12-24V DC

Media

