


15920.2

PRC 2 6-12-24V AC/DC

PRC 2 6-12-24V AC/DC

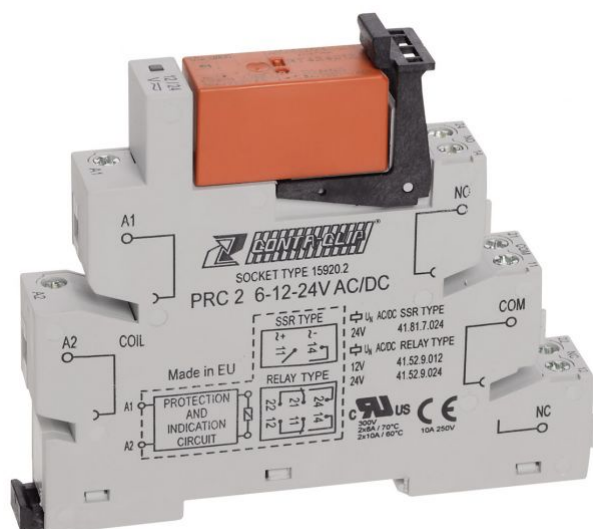

Plug-Relay-Compact (PRC) socket base PRC with screw connection, Mounting type: Mounting rail TS 35, 2 CO contact, Input voltage: 6.12 or 24 VAC/DC

Business data

Product description	Relay socket base with screw connection
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	60.9
Weight per piece (including packaging)	66.32
Unit of weight	G
Customs number	85369010
Country of origin	EEC

15920.2

PRC 2 6-12-24V AC/DC

PRC 2 6-12-24V AC/DC

Technical Data

Dimensions

Length	92 mm
Width	14 mm
Height TS 35 / 7.5 with BA	82 mm

Ratings

Rated voltage Un	6-12-24 VAC/DC
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Stripping length	10 mm
Torque	0.5 Nm

15920.2

PRC 2 6-12-24V AC/DC

PRC 2 6-12-24V AC/DC

Technical Data

Output data

Switching voltage / switching voltage max.	230 / 400 VAC
--	---------------

Contact configuration	2 CO contacts
-----------------------	---------------

Materials

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	70 °C
---------------------------	-------

Further technical data

Status display	✓
----------------	---

Pinning	5 mm
---------	------

15920.2

PRC 2 6-12-24V AC/DC

PRC 2 6-12-24V AC/DC

Approvals

Standards and regulations

CE compliant

✓

15920.2

PRC 2 6-12-24V AC/DC

PRC 2 6-12-24V AC/DC

Media

