


15930.8

AQI/PRC/8 YE

AQI/PRC/8 YE

---

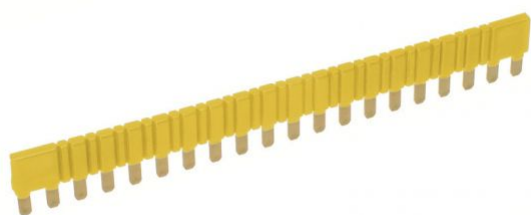

External cross-connector insulated for Plug-Relay-Compact (PRC 2), 8-pole, can be shortened, Voltage: 250 V, Current: 10 A

## Business data

---

Product description	Insulated external cross-connector
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	4.7
Weight per piece (including packaging)	6.5
Unit of weight	G
Customs number	85389099
Country of origin	EEC

**15930.8**

**AQI/PRC/8 YE**

**AQI/PRC/8 YE**

## Technical Data

---

### Ratings

---

Max. voltage	250 V
--------------	-------

Rated current	10 A
---------------	------

### Connection data

---

No. of poles	8
--------------	---

### Materials

---

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------