

MODEL: CEP-2224 | **DESCRIPTION:** PIEZO BUZZER INDICATOR**FEATURES**

- through-hole pins
- 12 Vdc rating
- 3.4 kHz rated frequency
- low profile

**SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated voltage			12		Vdc
operating voltage		3		20	Vdc
current consumption	at rated voltage			15	mA
rated frequency		2,900	3,400	3,900	Hz
sound pressure level	at 30 cm, rated voltage	78			dB
dimensions	Ø24.0 x 9.0				mm
weight				1.2	g
material	ABS PA-777D (black)				
terminal	pin type (Sn plating)				
operating temperature		-30		85	°C
storage temperature		-40		95	°C
RoHS	yes				

Notes: 1. All specifications measured at 5~35°C, humidity at 45~85%, under 86~106kPa pressure, unless otherwise noted.


SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering ²	for maximum 2 seconds	330		380	°C

Notes: 2. Not recommended for wave soldering

MECHANICAL DRAWING


units: mm
tolerance: ± 0.5 mm

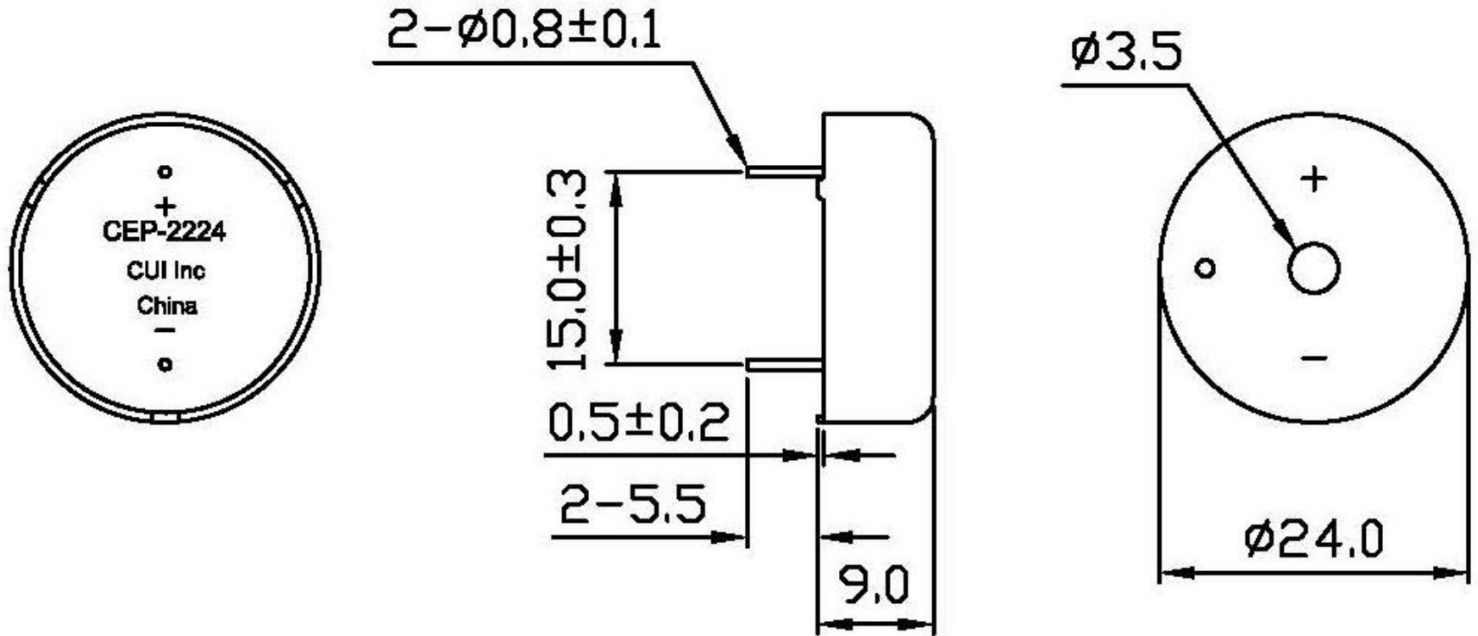

PERFORMANCE CURVES


P: Voltage vs. Sound Pressure Level
I: Voltage vs. Current Consumption

at 30cm

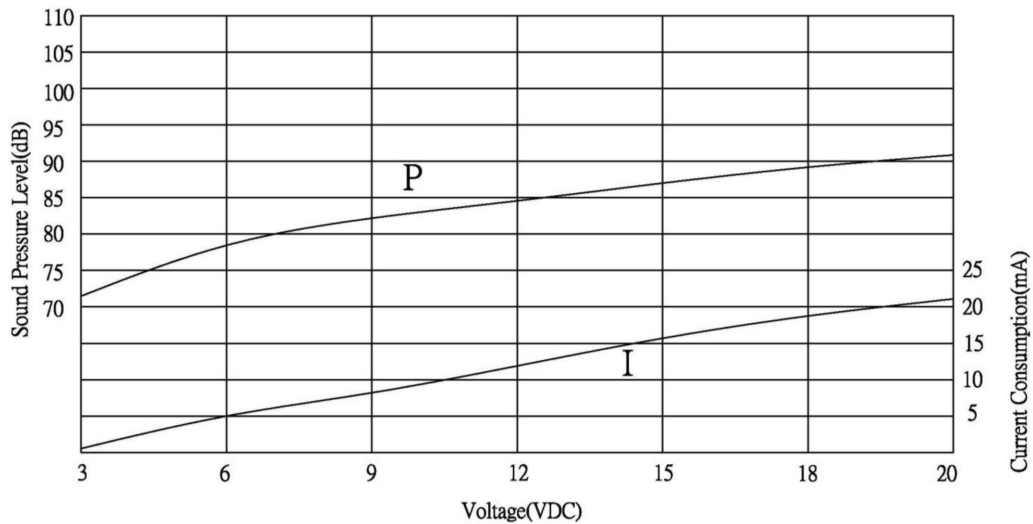


PACKAGING

Inner Unit Size: 305 x 245 x 49 mm
 Carton Size: 530 x 330 x 280 mm
 Tray QTY: 125 pcs per tray
 Inner Unit QTY: 250 pcs per unit
 Carton QTY: 2,500 pcs per carton

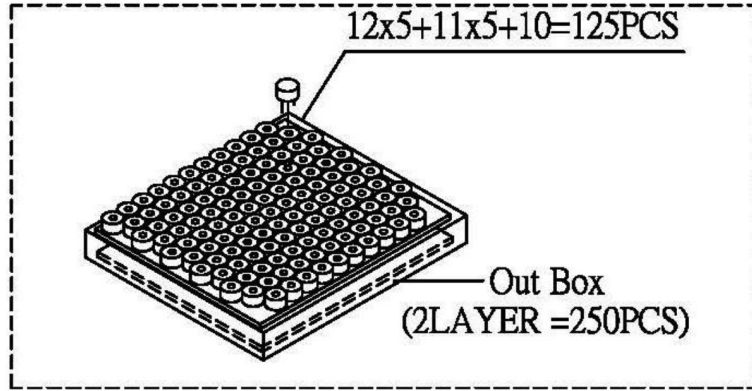

Lot No.	XXXXXXXXXX
Model No.	XXXXXXXXXX XXXXXXXXXX
Quantity.	XXXX Pcs
Date:	DD MM YY
MADE IN CHINA	
CUI Inc	

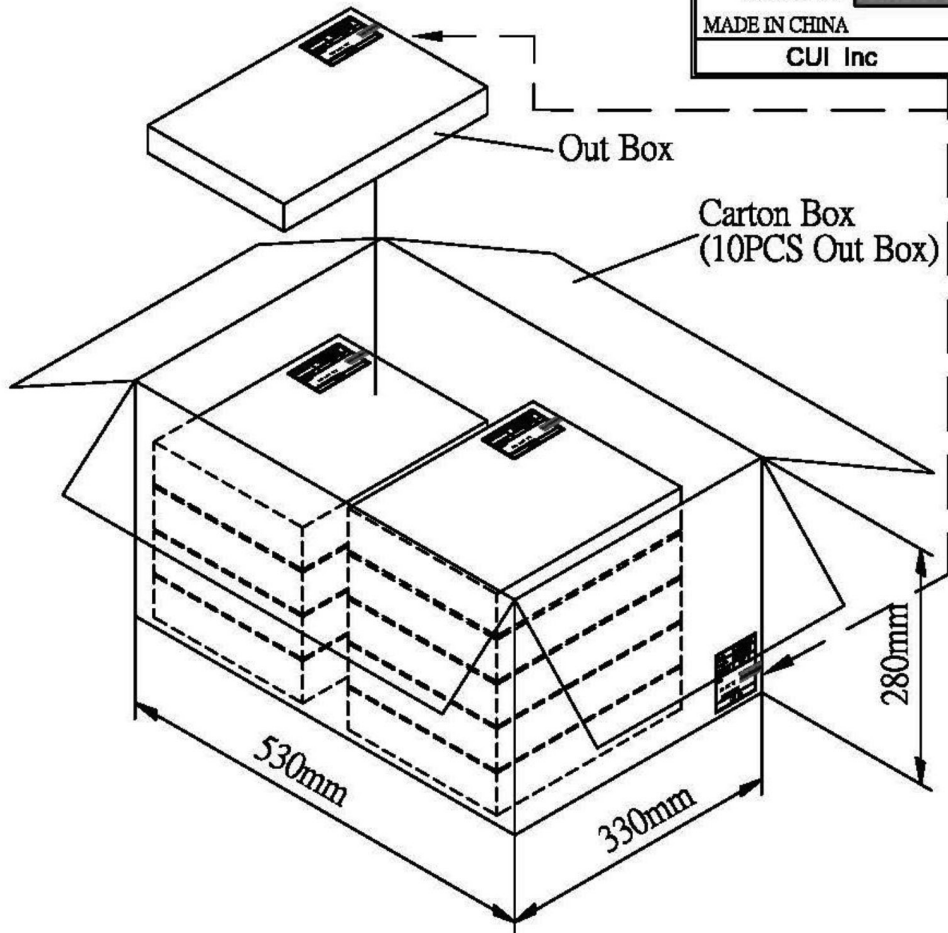

REVISION HISTORY

rev.	description	date
1.0	initial release	09/19/2006
1.01	applied new spec template	03/19/2019
1.02	brand update	10/11/2019

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.