




TOP VIEW

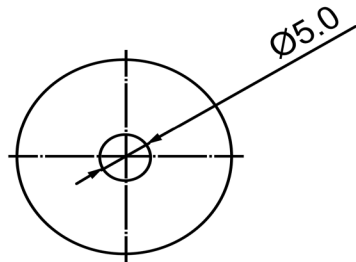

SIDE VIEW

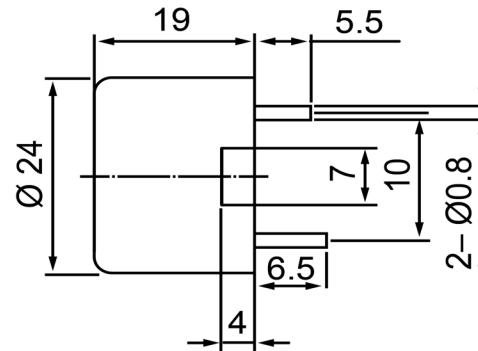

Specifications			Notes	Revision History											
Description	Value	Unit		Version	Description	Date	Approved								
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS 	1	Released from Engineering	10/21/2013	J.S								
Resonant Frequency	3,450	(Hz)													
Rated Voltage	8	(V)													
SPL @ 10cm	90	(dBA)													
Capacitance	20,000	(pF)													
Mount Type	Thru Hole														
Voltage Range	2 ~ 30	(V)													
Max Rated Current	5	(mA)													
Housing Material	ABS777														
Operating Temperature	-20 ~ +60	°C													
Storage Temperature	-30 ~ +70	°C													
Weight	5	(g)													
				Drawn by A.B.		Date 10/21/2013		Checked by C.E.		Date 10/21/2013		Approved by J.S		Date 10/21/2013	
				Piezo Transducer				TP243408-1							