

## KRP-C — 600Vac/300Vdc, 601-2000A, Time-Delay Fuses



**Description:** Ultimate protection Class L current-limiting, time-delay fuses. Time-delay – 4 seconds (minimum) at 500% of rated current.

**Catalog Symbol:** KRP-C-(amp)SP

**Ratings:**

- Volts — 600Vac, 300Vdc
- Amps — 601-2000A\*
- IR — 300kA Vac RMS Sym.
- 100kA Vdc

\* Use KRP-CL fuses for current ratings from 225 to 600 amps.

**Agency Information:**

CE, UL Listed, Guide JDDZ, File E4273  
 CSA Certified, Class 1422-02, File 53787,  
 Class L per CSA C22.2, No. 248.10  
 RoHS Compliant


**Catalog Numbers (amps)**

|             |              |              |
|-------------|--------------|--------------|
| KRP-C-601SP | KRP-C-900SP  | KRP-C-1500SP |
| KRP-C-650SP | KRP-C-1000SP | KRP-C-1600SP |
| KRP-C-700SP | KRP-C-1100SP | KRP-C-1800SP |
| KRP-C-750SP | KRP-C-1200SP | KRP-C-1900SP |
| KRP-C-800SP | KRP-C-1350SP | KRP-C-2000SP |
| KRP-C-801SP | KRP-C-1400SP |              |

**Carton Quantity:**

| Amp Rating | Carton Qty. |
|------------|-------------|
| 601-2000   | 1           |

**Dimensions - in**

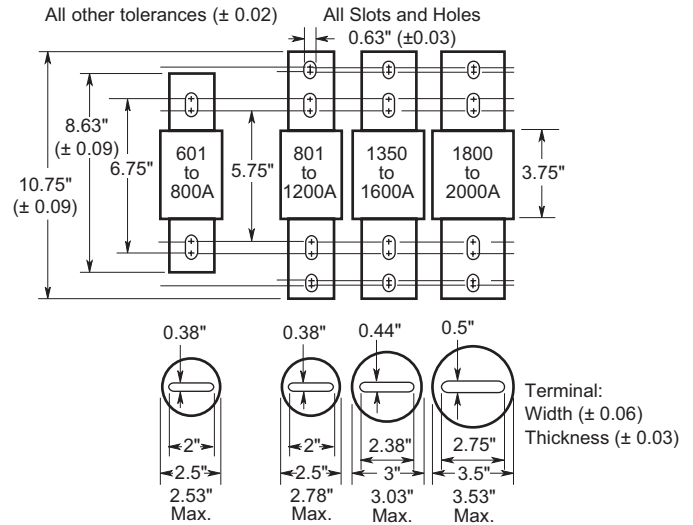

**Features:**

- Industry's only UL Listed and CSA Certified fuse with a 300kA interrupting rating that allows for simple, worry-free installation in virtually any application.
- Fast short-circuit protection and dual-element, time-delay performance provide ultimate protection.
- Reduces existing fuse inventory by up to 33% when upgrading to Low-Peak fuses.
- Consistent 2:1 ampacity ratios for all Low-Peak fuses make selective coordination easy.
- Time-delay for close sizing load.
- Current-limiting action of the fuse generally affords considerable reduction in bus bracing.
- All-purpose silver-linked fuse for both overload and short-circuit protection for high capacity systems (mains and large feeders).
- O-ring seals maximize pressure build-up during current-limiting action and ensure filter retention.
- High-grade silica sand filler accelerates response of fuse to short-circuits by having quenching effect on the fuse arc.
- 99.9% Pure silver links provide low watt loss with low operating temperature on normal current levels and minimizes total clearing I<sup>2</sup>t fault energy left-through.

**Recommended Fuse Blocks — 601 to 1200 Amps†**


| Catalog Numbers | Poles |
|-----------------|-------|
| 51215           | 1     |
| 51235           | 3     |

† No Agency listings available.

No reducers available.


## KRP-C — 600Vac/300Vdc, 601-2000A, Time-Delay Fuses

### Time-Current Curves - Average Melt

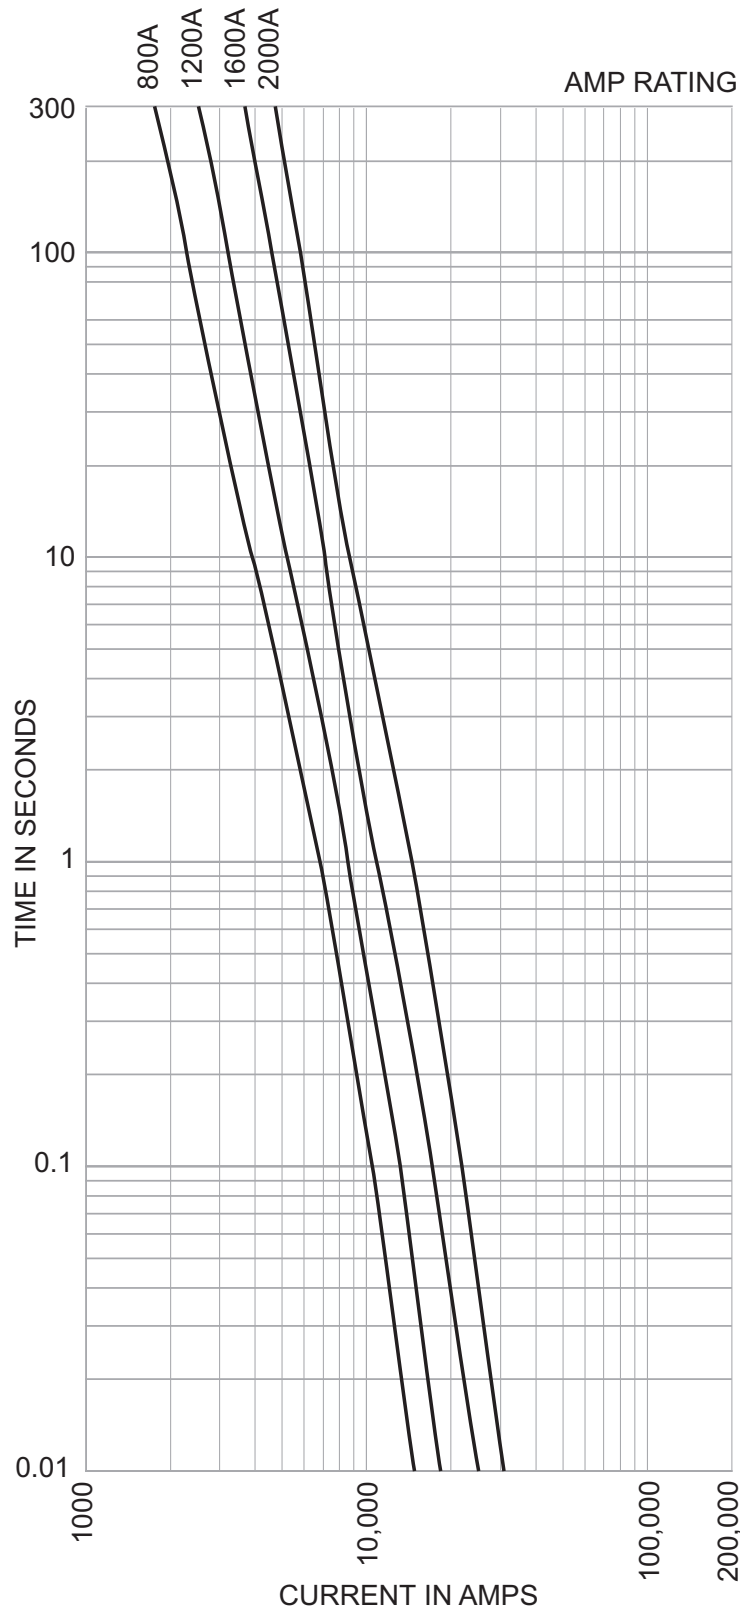

## KRP-C — 600Vac/300Vdc, 601-2000A, Time-Delay Fuses

### Current-Limitation Curves

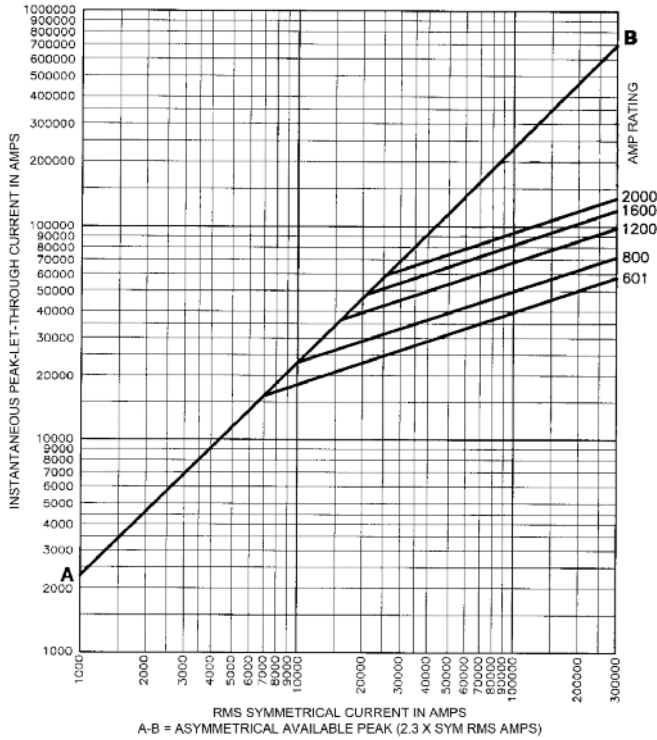

### Current-Limiting Effects

| Prosp.<br>S.C.C. | Let-Through Current<br>(Apparent RMS Symmetrical Vs. Fuse Rating) |        |        |        |        |
|------------------|---|--------|--------|--------|--------|
|                  | 601A  | 800A   | 1200A  | 1600A  | 2000A  |
| —                | 5000  | 5000   | 5000   | 5000   | 5000   |
| 5000             | 5000  | 5000   | 5000   | 5000   | 5000   |
| 10,000           | 8000  | 10,000 | 10,000 | 10,000 | 10,000 |
| 15,000           | 9000  | 12,000 | 15,000 | 15,000 | 15,000 |
| 20,000           | 10,000  | 13,000 | 17,000 | 20,000 | 20,000 |
| 25,000           | 11,000  | 14,000 | 19,000 | 22,000 | 25,000 |
| 30,000           | 11,000  | 14,000 | 20,000 | 24,000 | 27,000 |
| 35,000           | 12,000  | 15,000 | 21,000 | 25,000 | 29,000 |
| 40,000           | 13,000  | 16,000 | 22,000 | 26,000 | 30,000 |
| 50,000           | 14,000  | 17,000 | 23,000 | 28,000 | 32,000 |
| 60,000           | 15,000  | 18,000 | 25,000 | 30,000 | 34,000 |
| 70,000           | 15,000  | 19,000 | 26,000 | 32,000 | 36,000 |
| 80,000           | 16,000  | 20,000 | 27,000 | 33,000 | 38,000 |
| 90,000           | 17,000  | 21,000 | 29,000 | 34,000 | 39,000 |
| 100,000          | 17,000  | 22,000 | 30,000 | 36,000 | 41,000 |
| 150,000          | 20,000  | 25,000 | 34,000 | 41,000 | 47,000 |
| 200,000          | 22,000  | 27,000 | 37,000 | 45,000 | 51,000 |
| 250,000          | 24,000  | 29,000 | 40,000 | 49,000 | 55,000 |
| 300,000          | 25,000  | 31,000 | 43,000 | 52,000 | 59,000 |

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.