

S505SCH

5 mm x 20 mm Time-delay, high I²t, axial lead, ceramic tube fuses



Product features

- Time-delay, high breaking capacity
- High I²t
- Nickel-plated brass end cap construction
- 5 mm x 20 mm physical size

Applications

Primary circuit protection:

- Power supplies
- LED lighting
- LED/LCD televisions
- Appliances and white goods
- Printers

Agency information

- cURus Recognition file number: E19180, Guide JDYX2/JDYX8
- CCC: 2019010207250677; 2019010207250321
- KC-Mark: File SU05030-14002
- TUV: R50294952

Ordering

- The ordering code is the part number replacing the " " with a "-" plus adding the packaging prefix (i.e. S505SCH-3.15-R; BK-S505SCH-3-15-R)

Packaging prefixes

- BK- (20 parts in a carrier, 5 carriers in a box)
- TR2- (1500 parts per reel, tape width 52 mm)
- TR3- (1500 parts per reel, tape width 54 mm)

Electrical characteristics

I _n	1.5I _n min minute	2.1I _n max minute	2.75I _n min ms	max s	4I _n min ms	max s	10I _n min ms	max ms
3.15 A	60	30	750	80	95	5	10	150
5 A - 6.3 A	60	30	750	80	150	5	10	150

Product specifications

Part number ⁵	Current rating (A)	Voltage rating (Vac)	Interrupting rating at rated voltage ¹ (50 Hz) (A)	Typical DC cold resistance ² (Ω)	Typical pre-arcing ³ I ² t (A ² s)	Typical voltage drop ⁴ (mV)	cURus	KC	CCC	TUV
S505SCH-3.15-R	3.15	250	1500	0.017	120	67	x	x	x	x
S505SCH-5-R	5.0	250	1500	0.014	160	90	x	x	x	x
S505SCH-6.3-R	6.3	250	1500	0.010	330	85	x	x	x	x

1 Interrupting ratings 3.15 A to 6.3 A were measured at 70% to 80% PF on AC.

2 Typical DC cold resistance measured at <10% of rated current.

3. Typical I²t value is measured at 10 times the rated current under DC.

4. Typical voltage drop is measured at +20 °C ambient temperature at rated current.

5. Part number definition: S505SCH-xxx-R

S505 = Product code

SCH = Single cap- high I²t


xxx = Ampere rating

-R = RoHS compliant


Dimensions—mm

A


BK: 38.1±0.38
TR2: 15.75 typ
TR3: 16.75 typ

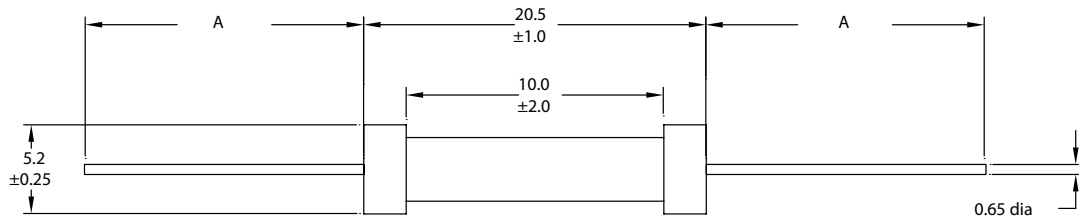


Time vs. current curve

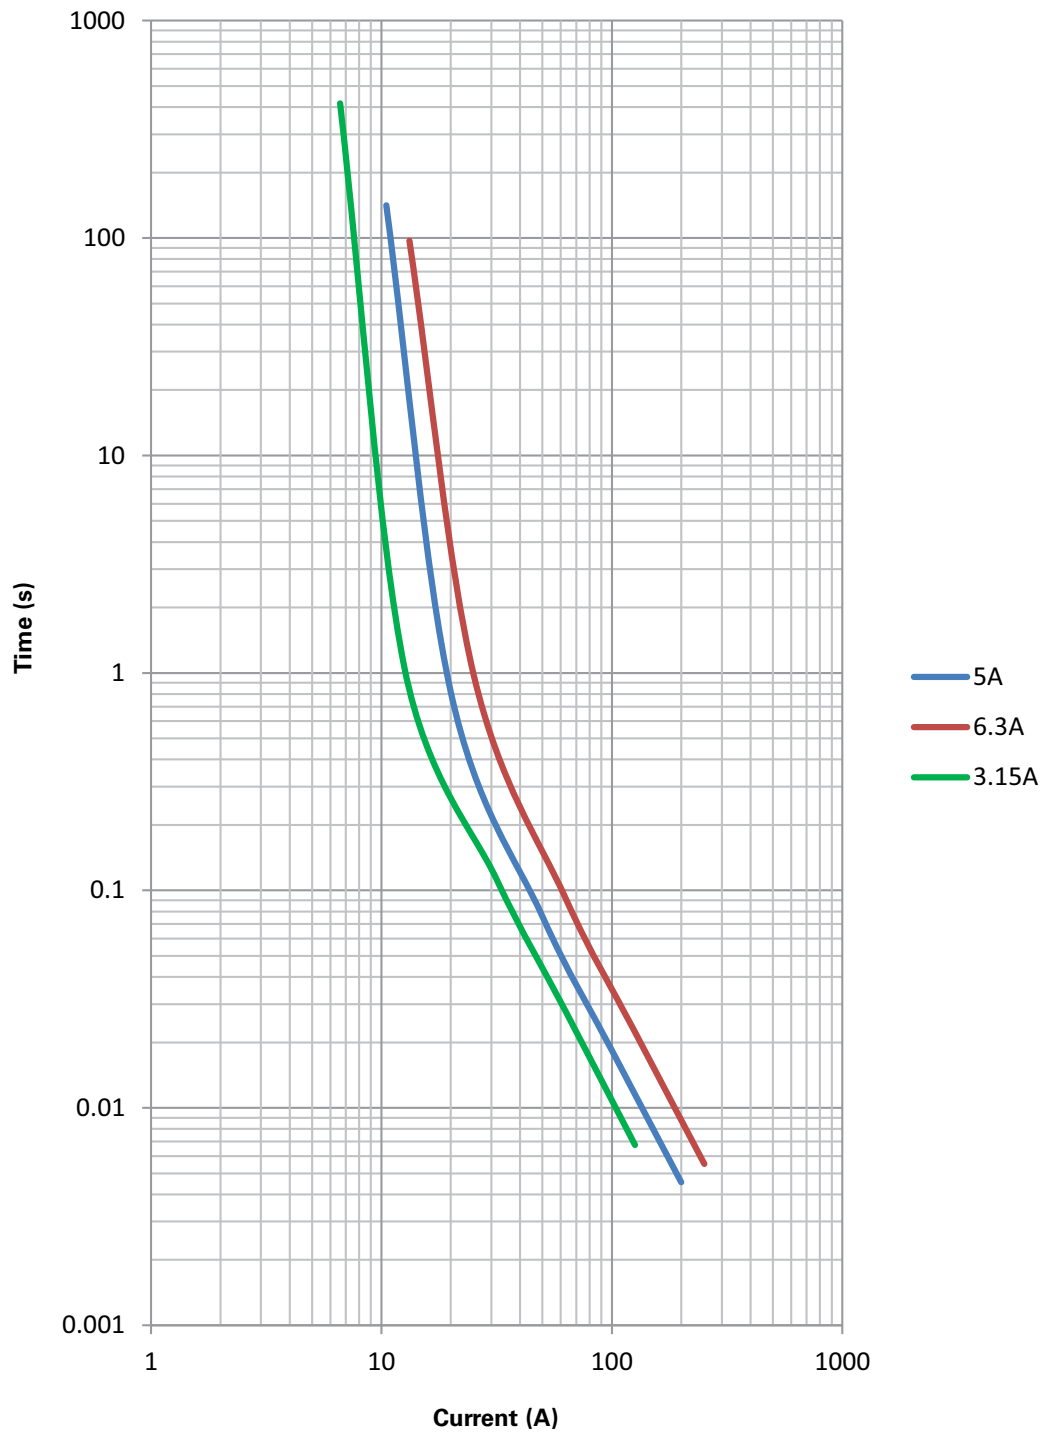


I²t vs. current curve

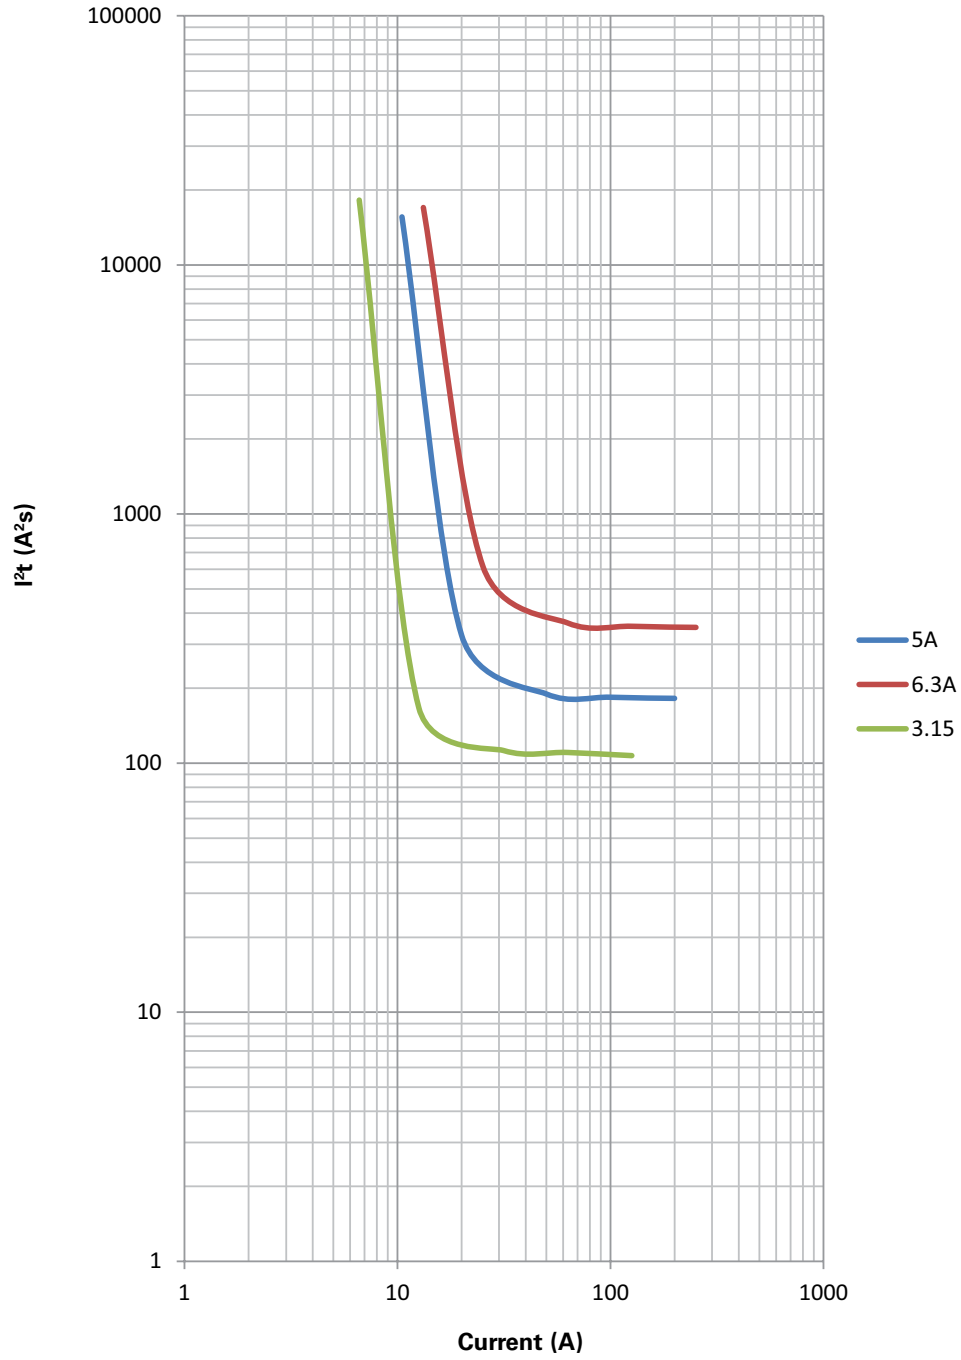

I²t vs. time curve

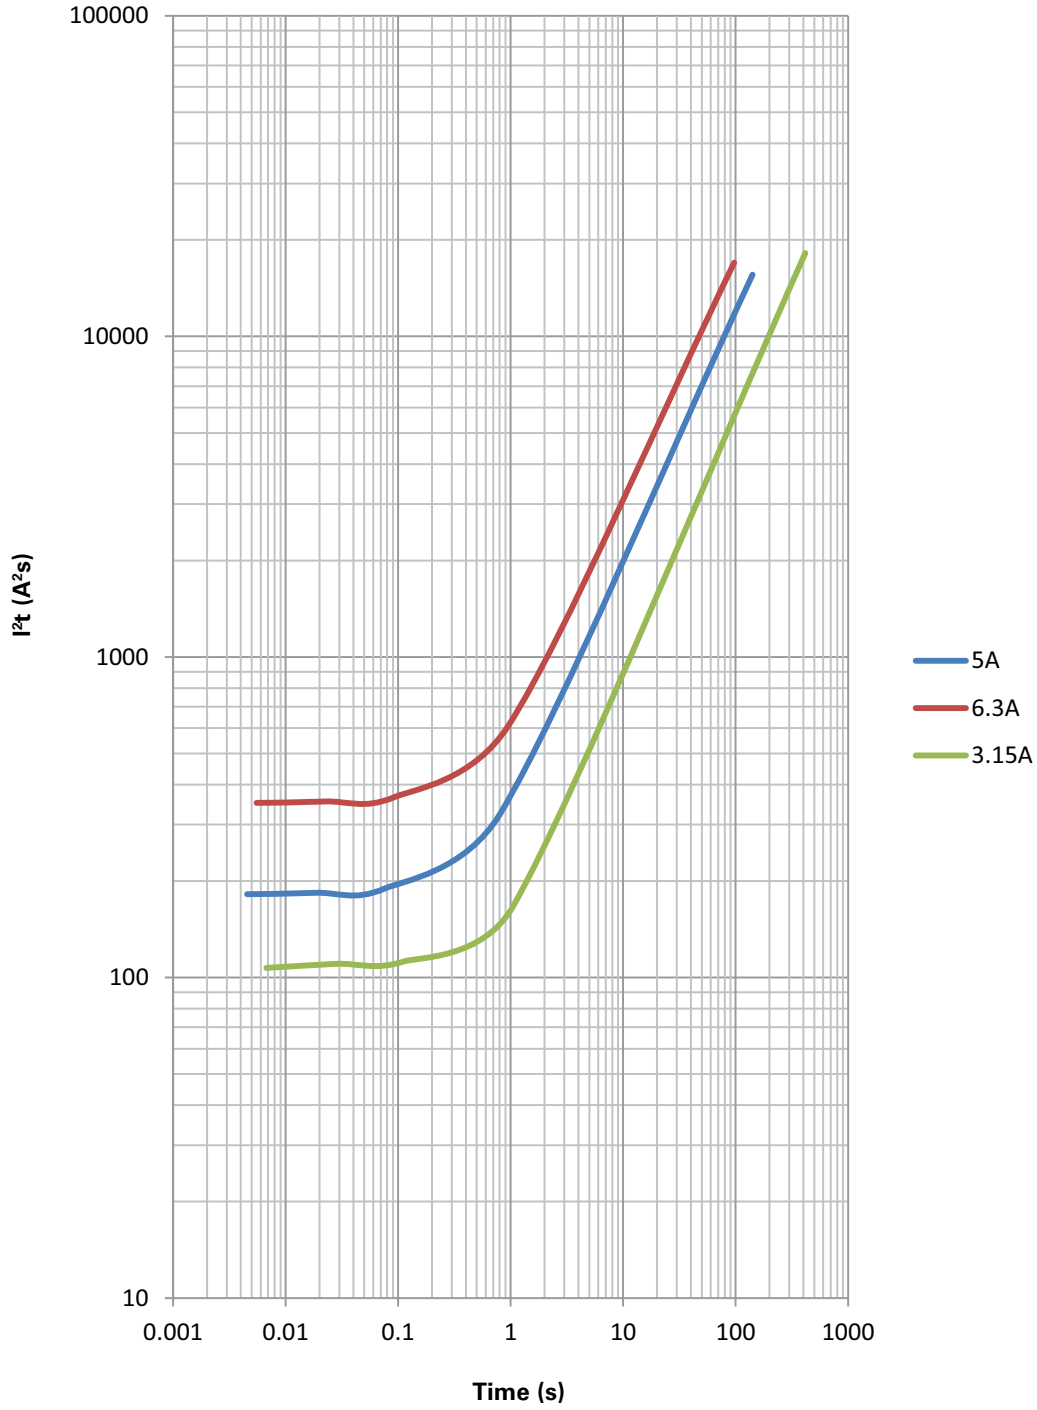

Temperature derating curve

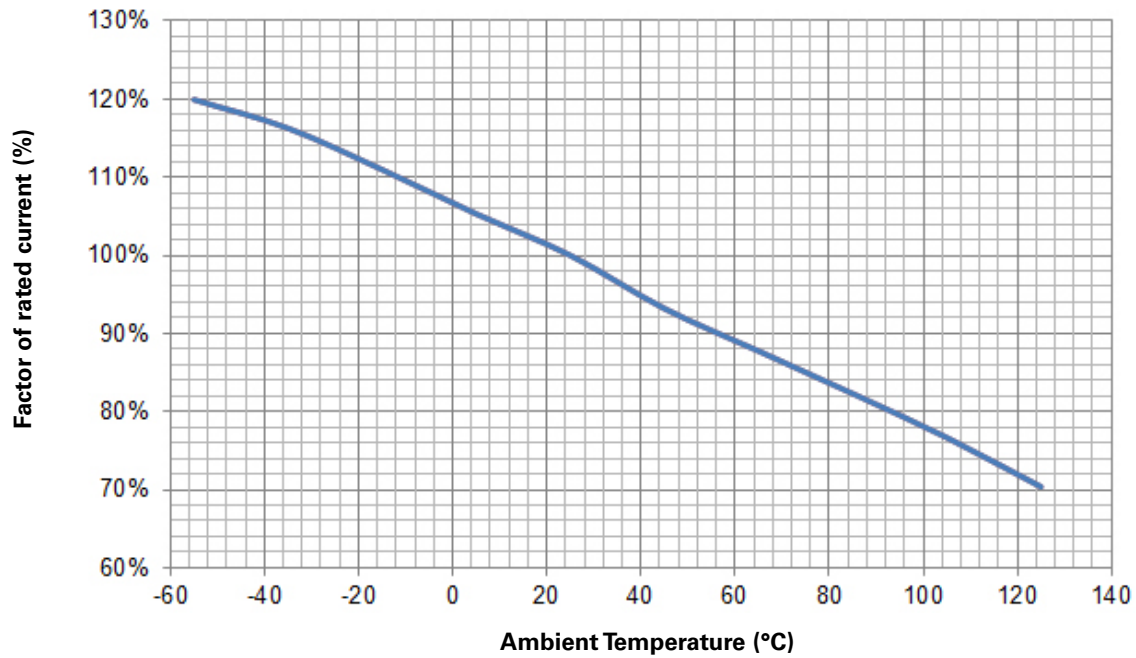

General specifications

Operating temperature: -55 °C to +125 °C (with derating)


Thermal shock: MIL-STD- 202G, Method 107G, test condition B (5 cycles -65 °C to +125 °C)

Vibration: MIL-STD- 202G, method 201A

Humidity: MIL-STD- 202G, method 103B, test condition A

Salt spray: MIL-STD- 202G, method 101E, test condition B

Wave solder profile

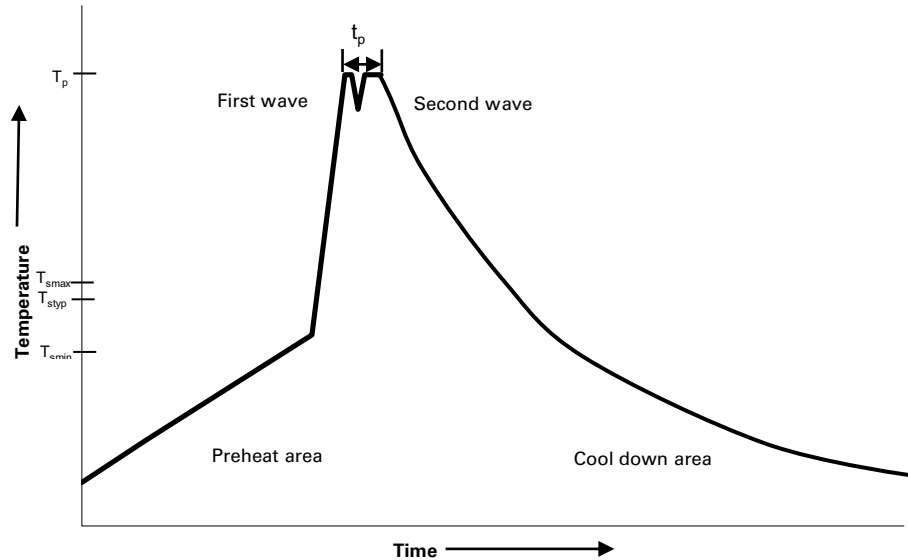

Reference EN 61760-1:2006

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat		
• Temperature min. (T_{smin})	100 °C	100 °C
• Temperature typ. (T_{styp})	120 °C	120 °C
• Temperature max. (T_{smax})	130 °C	130 °C
• Time (T_{smin} to T_{smax}) (t_s)	70 seconds	70 seconds
Δ preheat to max Temperature	150 °C max.	150 °C max.
Peak temperature (T_p)*	235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2019 Eaton
All Rights Reserved
Printed in USA
Publication No. 10401 PCN19017M
December 2019

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

