


# BNC COAXIAL TEST CABLES

## BASIC INFORMATION

**Male Connectors**—Brass Body and Fittings, Teflon Insulators, Silver or Gold-Plated Brass Contact, Bright Tarnish Resistant Metal Alloy Finish.

**Female Connectors**—Brass Body and Fittings, Teflon Insulators, Silver or Gold-Plated Beryllium Copper Contact, Bright Tarnish Resistant Metal Alloy Finish.

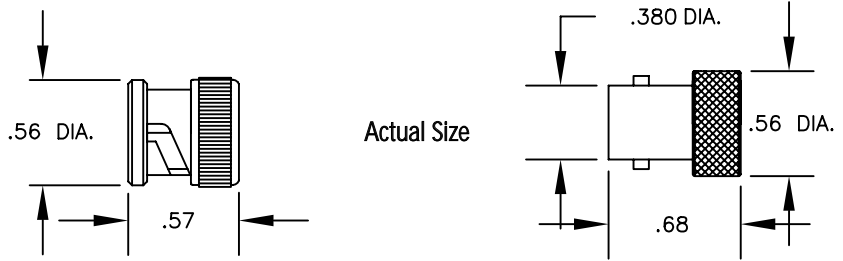


## QUICK DISCONNECT BNC CABLE ASSEMBLY

USES CONNECTOR P/N 8916


FOR RG58C/U CABLE ONLY

Part Number - Length
1504 - 6, 12, 18, 24, 30, 36, 48, 60




## BNC MALE WITH STRAIN RELIEF BOOT TO CABLE ONLY . . . NO INTERFACE

Cable Type	RG58C/U	RG174/U	RG59/U	RG62B/U	MIC
Cable Length	Part No.	Part No.	Part No.	Part No.	Part No.
6"	15cm	1222-6	4222-6	7522-6	6222-6
12"	30cm	1222-12	4222-12	7522-12	6222-12
18"	45cm	1222-18	4222-18	7522-18	6222-18
24"	60cm	1222-24	4222-24	7522-24	6222-24
30"	75cm	1222-30	4222-30	7522-30	6222-30
36"	90cm	1222-36	4222-36	7522-36	6222-36
48"	120cm	1222-48	4222-48	7522-48	6222-48
60"	150cm	1222-60	4222-60	7522-60	6222-60




## BNC MALE TO BNC MALE WITH STRAIN RELIEF BOOTS

Cable Type	RG58C/U		RG174/U		RG59/U		MIC	
Cable Length	Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only	
6"	15cm	1026-6	1726-6	4026-6	4726-6	7526-6	7726-6	2026-6
12"	30cm	1026-12	1726-12	4026-12	4726-12	7526-12	7726-12	2026-12
18"	45cm	1026-18	1726-18	4026-18	4726-18	7526-18	7726-18	2026-18
24"	60cm	1026-24	1726-24	4026-24	4726-24	7526-24	7726-24	2026-24
30"	75cm	1026-30	1726-30	4026-30	4726-30	7526-30	7726-30	2026-30
36"	90cm	1026-36	1726-36	4026-36	4726-36	7526-36	7726-36	2026-36
48"	120cm	1026-48	1726-48	4026-48	4726-48	7526-48	7726-48	2026-48
60"	150cm	1026-60	1726-60	4026-60	4726-60	7526-60	7726-60	2026-60

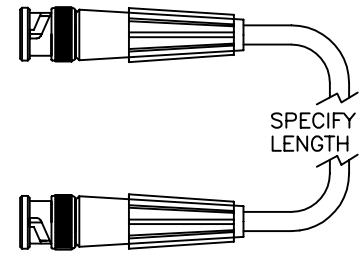


## BNC FEMALE TO BNC MALE WITH STRAIN RELIEF BOOTS

Cable Type	RG58C/U		RG174/U		RG59/U		MIC	
Cable Length	Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only	
6"	15cm	1025-6	1725-6	4025-6	4725-6	7525-6	7725-6	2025-6
12"	30cm	1025-12	1725-12	4025-12	4725-12	7525-12	7725-12	2025-12
18"	45cm	1025-18	1725-18	4025-18	4725-18	7525-18	7725-18	2025-18
24"	60cm	1025-24	1725-24	4025-24	4725-24	7525-24	7725-24	2025-24
30"	75cm	1025-30	1725-30	4025-30	4725-30	7525-30	7725-30	2025-30
36"	90cm	1025-36	1725-36	4025-36	4725-36	7525-36	7725-36	2025-36
48"	120cm	1025-48	1725-48	4025-48	4725-48	7525-48	7725-48	2025-48
60"	150cm	1025-60	1725-60	4025-60	4725-60	7525-60	7725-60	2025-60

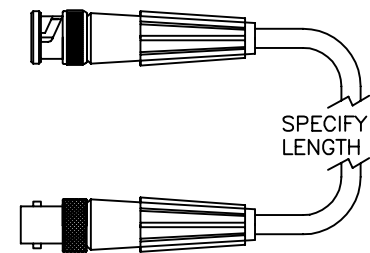

## BNC FEMALE TO BNC FEMALE WITH STRAIN RELIEF BOOTS


Cable Type	RG58C/U		RG174/U		RG59/U		MIC	
Cable Length	Standard	Weatherproof	Standard	Weatherproof	Standard	Weatherproof	Std Only	
6"	15cm	1024-6	1724-6	4024-6	4724-6	7524-6	7724-6	2024-6
12"	30cm	1024-12	1724-12	4024-12	4724-12	7524-12	7724-12	2024-12
18"	45cm	1024-18	1724-18	4024-18	4724-18	7524-18	7724-18	2024-18
24"	60cm	1024-24	1724-24	4024-24	4724-24	7524-24	7724-24	2024-24
30"	75cm	1024-30	1724-30	4024-30	4724-30	7524-30	7724-30	2024-30
36"	90cm	1024-36	1724-36	4024-36	4724-36	7524-36	7724-36	2024-36
48"	120cm	1024-48	1724-48	4024-48	4724-48	7524-48	7724-48	2024-48
60"	150cm	1024-60	1724-60	4024-60	4724-60	7524-60	7724-60	2024-60

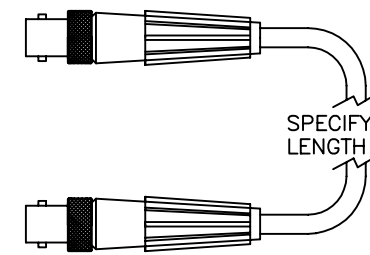

# BNC COAXIAL TEST CABLES


## RIGHT ANGLE BNC MALE TO RIGHT ANGLE BNC MALE WITH STRAIN RELIEF BOOTS

Cable Type		RG58C/U		RG174/U	
Cable Length		Standard	Weatherproof	Standard	Weatherproof
6"	15cm	1126-6	1626-6	4126-6	4756-6
12"	30cm	1126-12	1626-12	4126-12	4756-12
18"	45cm	1126-18	1626-18	4126-18	4756-18
24"	60cm	1126-24	1626-24	4126-24	4756-24
30"	75cm	1126-30	1626-30	4126-30	4756-30
36"	90cm	1126-36	1626-36	4126-36	4756-36
48"	120cm	1126-48	1626-48	4126-48	4756-48
60"	150cm	1126-60	1626-60	4126-60	4756-60

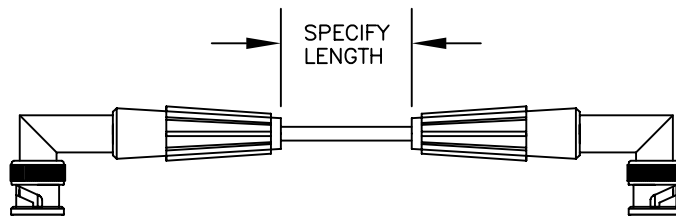

## RIGHT ANGLE BNC MALE TO STRAIGHT BNC MALE WITH STRAIN RELIEF BOOTS


Cable Type		RG58C/U		RG174/U	
Cable Length		Standard	Weatherproof	Standard	Weatherproof
6"	15cm	1127-6	1627-6	4127-6	4727-6
12"	30cm	1127-12	1627-12	4127-12	4727-12
18"	45cm	1127-18	1627-18	4127-18	4727-18
24"	60cm	1127-24	1627-24	4127-24	4727-24
30"	75cm	1127-30	1627-30	4127-30	4727-30
36"	90cm	1127-36	1627-36	4127-36	4727-36
48"	120cm	1127-48	1627-48	4127-48	4727-48
60"	150cm	1127-60	1627-60	4127-60	4727-60

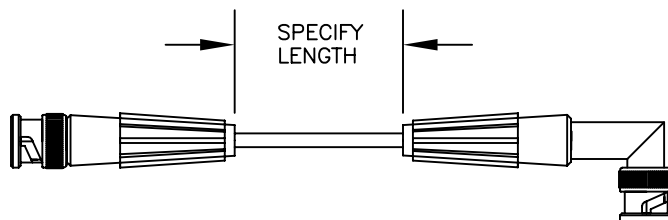

## BNC MALE TO BNC MALE

### CONVENTIONAL CONSTRUCTION Field Serviceable


Cable Type		RG58C/U	RG142B/U	RG174/U	RG316/U	RG62B/U	RG59/U
Cable Length		Part No.	Part No.	Part No.	Part No.	Part No.	Part No.
6"	15cm	1046-6	1146-6	4046-6	4146-6	6246-6	7546-6
12"	30cm	1046-12	1146-12	4046-12	4146-12	6246-12	7546-12
18"	45cm	1046-18	1146-18	4046-18	4146-18	6246-18	7546-18
24"	60cm	1046-24	1146-24	4046-24	4146-24	6246-24	7546-24
30"	75cm	1046-30	1146-30	4046-30	4146-30	6246-30	7546-30
36"	90cm	1046-36	1146-36	4046-36	4146-36	6246-36	7546-36
48"	120cm	1046-48	1146-48	4046-48	4146-48	6246-48	7546-48
60"	150cm	1046-60	1146-60	4046-60	4146-60	6246-60	7546-60

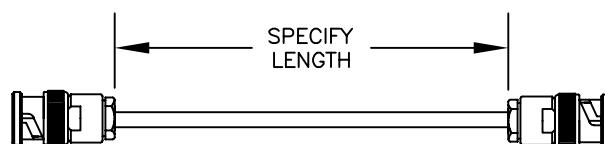

## BNC MALE TO BNC FEMALE


### CONVENTIONAL CONSTRUCTION Field Serviceable

Cable Type		RG58C/U	RG142B/U	RG62B/U	RG59/U
Cable Length		Part No.	Part No.	Part No.	Part No.
6"	15cm	1045-6	1145-6	6245-6	7545-6
12"	30cm	1045-12	1145-12	6245-12	7545-12
18"	45cm	1045-18	1145-18	6245-18	7545-18
24"	60cm	1045-24	1145-24	6245-24	7545-24
30"	75cm	1045-30	1145-30	6245-30	7545-30
36"	90cm	1045-36	1145-36	6245-36	7545-36
48"	120cm	1045-48	1145-48	6245-48	7545-48
60"	150cm	1045-60	1145-60	6245-60	7545-60

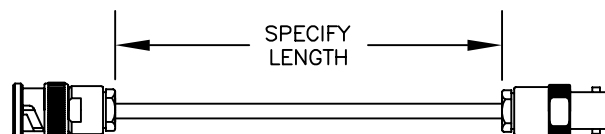

## BNC MALE TO BNC MALE CRIMP CONSTRUCTION

Cable Type		RG58C/U	RG174/U	RG59/U	MIC
Cable Length		Part No.	Part No.	Part No.	Part No.
6"	15cm	1426-6	4426-6	7426-6	2426-6
12"	30cm	1426-12	4426-12	7426-12	2426-12
18"	45cm	1426-18	4426-18	7426-18	2426-18
24"	60cm	1426-24	4426-24	7426-24	2426-24
30"	75cm	1426-30	4426-30	7426-30	2426-30
36"	90cm	1426-36	4426-36	7426-36	2426-36
48"	120cm	1426-48	4426-48	7426-48	2426-48
60"	150cm	1426-60	4426-60	7426-60	2426-60

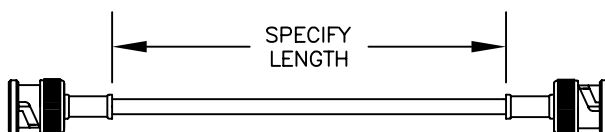

# BNC MALE COAXIAL TEST CABLES

**COLOR (STANDARD):** RED = CENTER      BLACK = GROUND


**COLOR CODING:** The Red Connector may be replaced with any of the other 9 available colors: Black, Brown, Orange, Yellow, Green, Blue, Violet, Gray or White. Specify desired color after complete Part No. A matching Color Band will be supplied at the interface end.

**CABLE LENGTH:** Desired length must be specified in inches to make a Complete Part Number.

SPECIFY CABLE LENGTH IN INCHES


Inches	Metric	Inches	Metric	Inches	Metric
18"	45cm	30"	75cm	48"	120cm
24"	60cm	36"	90cm	60"	150cm

## 8901B BNC MALE CONNECTOR (Actual Size)

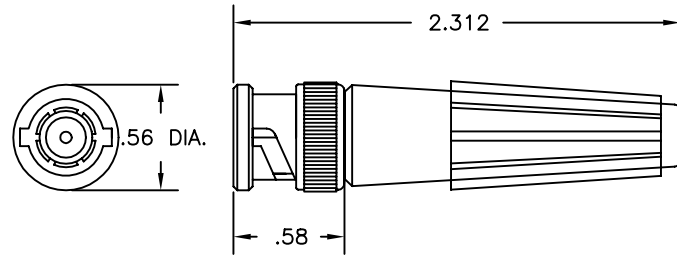

## DOUBLE GRIPPER HOOK XK CABLES (Illustration NOT to Scale)

RED XK CENTER



BLACK XK GROUND



CABLE WITH XK GROUND


Part No.	Cable	Center	Ground
1020XK-(lgth)	RG58C/U	XK	XK
2020XK-(lgth)	MIC	XK	XK
4020XK-(lgth)	RG174/U	XK	XK

CABLE WITH NO. 9275 MINI ALLIGATOR GROUND

Part No.	Cable	Center	Ground
1021XK-(lgth)	RG58C/U	XK	Mini Allig.
2021XK-(lgth)	MIC	XK	Mini Allig.
4021XK-(lgth)	RG174/U	XK	Mini Allig.

## MICRO-HOOK XM CABLES (Illustration NOT to Scale)

RED XM CENTER



BLACK XM GROUND



CABLE WITH XM GROUND


Part No.	Cable	Center	Ground
1020XM-(lgth)	RG58C/U	XM	XM
2020XM-(lgth)	MIC	XM	XM
4020XM-(lgth)	RG174U	XM	XM

CABLE WITH NO. 9275 MINI ALLIGATOR GROUND

Part No.	Cable	Center	Ground
1021XM-(lgth)	RG58C/U	XM	Mini Allig.
2021XM-(lgth)	MIC	XM	Mini Allig.
4021XM-(lgth)	RG174U	XM	Mini Allig.

## MINI-HOOK X100W CABLES (Illustration NOT to Scale)

RED X100W CENTER



BLACK X100W GROUND



CABLE WITH X100W GROUND


Part No.	Cable	Center	Ground
1020-(lgth)	RG58C/U	X100W	X100W
2020-(lgth)	MIC	X100W	X100W

CABLE WITH NO. 9274 STD. ALLIGATOR GROUND

Part No.	Cable	Center	Ground
1021-(lgth)	RG58C/U	X100W	Std. Allig.
2021-(lgth)	MIC	X100W	Std. Allig.

## MINI-HOOK XL1 CABLES (Illustration NOT to Scale)

RED XL1 CENTER



BLACK X100W GROUND




CABLE WITH X100W GROUND

Part No.	Cable	Center	Ground
1020XL1-(lgth)	RG58C/U	XL1	X100W
2020XL1-(lgth)	MIC	XL1	X100W

CABLE WITH NO. 9274 STD. ALLIGATOR GROUND

Part No.	Cable	Center	Ground
1021XL1-(lgth)	RG58C/U	XL1	Std. Allig.
2021XL1-(lgth)	MIC	XL1	Std. Allig.

**MINI-HOOK XR CABLES** (Illustration NOT to Scale)

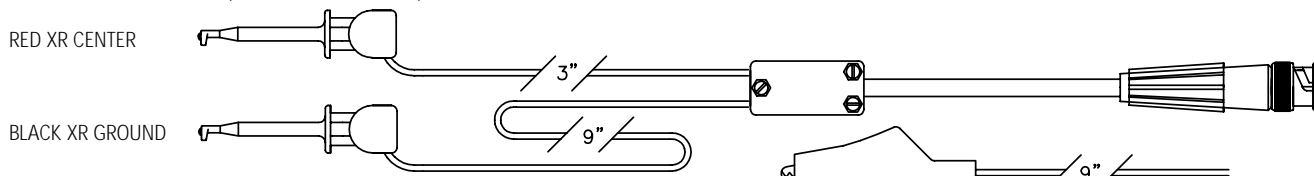


CABLE WITH XR GROUND

Part No.	Cable	Center	Ground
<b>1020XR</b> -(lgth)	RG58C/U	XR	XR
<b>2020XR</b> -(lgth)	MIC	XR	XR

CABLE WITH NO. 9274 STD. ALLIGATOR GROUND

Part No.	Cable	Center	Ground
<b>1021XR</b> -(lgth)	RG58C/U	XR	Std. Allig.
<b>2021XR</b> -(lgth)	MIC	XR	Std. Allig.

**MACRO-HOOK XH CABLES** (Illustration NOT to Scale)

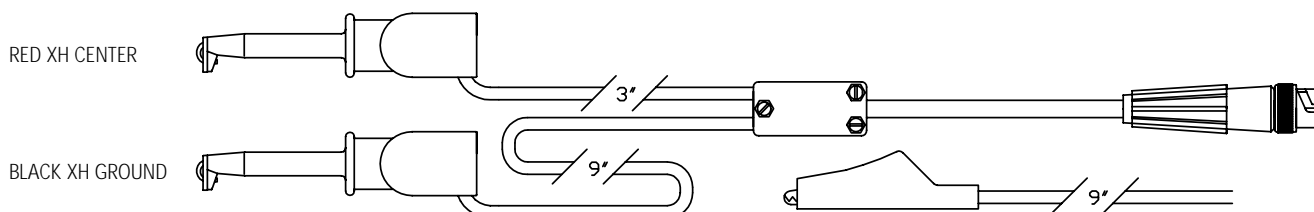


CABLE WITH XH GROUND

Part No.	Cable	Center	Ground
<b>1020XH</b> -(lgth)	RG58C/U	XH	XH
<b>2020XH</b> -(lgth)	MIC	XH	XH

CABLE WITH NO. 9274 STD. ALLIGATOR GROUND

Part No.	Cable	Center	Ground
<b>1021XH</b> -(lgth)	RG58C/U	XH	Std. Allig.
<b>2021XH</b> -(lgth)	MIC	XH	Std. Allig.

**E-Z-HOOK ALLIGATOR CLIP CABLES** (Illustration NOT to Scale)

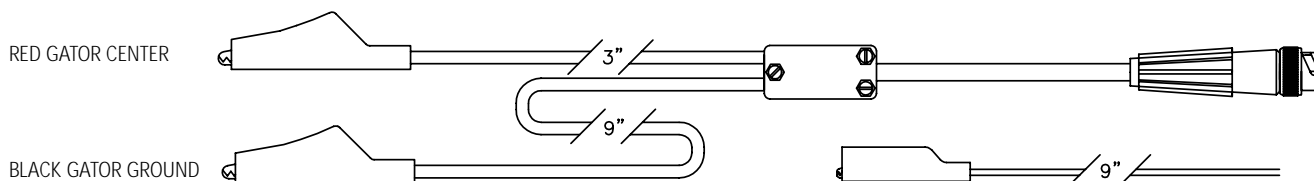


CABLE WITH STD. ALLIGATORS NO. 9274

Part No.	Cable	Center	Ground
<b>1029</b> -(lgth)	RG58C/ U	Std. Allig.	Std. Allig.
<b>2029</b> -(lgth)	MIC	Std. Allig.	Std. Allig.
<b>4029</b> -(lgth)	RG174U	Std. Allig.	Std. Allig.

CABLE WITH MINI ALLIGATORS NO. 9275

Part No.	Cable	Center	Ground
<b>1029M</b> -(lgth)	RG58C/U	Mini Allig.	Mini Allig.
<b>2029M</b> -(lgth)	MIC	Mini Allig.	Mini Allig.
<b>4029M</b> -(lgth)	RG174U	Mini Allig.	Mini Allig.

**STANDARD BANANA PLUG or STACKING BANANA PLUG CABLES** (Illustration NOT to Scale)

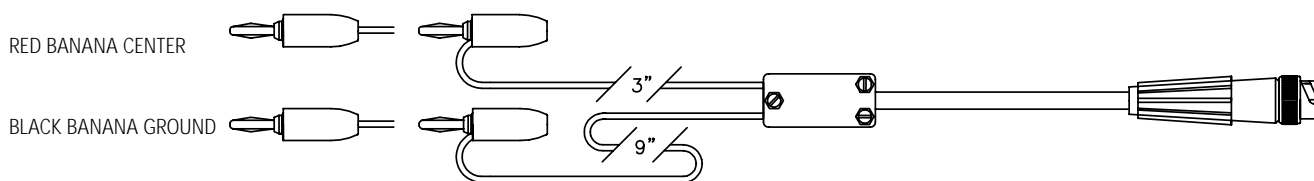


CABLE WITH STD. BANANA PLUG CENTER AND GROUND NO. 9202

Part No.	Cable	Center	Ground
<b>1223</b> -(lgth)	RG58C/U	Std. Banana	Std. Banana
<b>2223</b> -(lgth)	MIC	Std. Banana	Std. Banana
<b>4223</b> -(lgth)	RG174U	Std. Banana	Std. Banana
<b>6223</b> -(lgth)	RG62B/U	Std. Banana	Std. Banana

CABLE WITH STACKING BANANA CENTER AND GROUND NO. 9203

Part No.	Cable	Center	Ground
<b>1224</b> -(lgth)	RG58C/U	Stacking Banana	Stacking Banana
<b>2224</b> -(lgth)	MIC	Stacking Banana	Stacking Banana
<b>4224</b> -(lgth)	RG174U	Stacking Banana	Stacking Banana
<b>6224</b> -(lgth)	RG62B/U	Stacking Banana	Stacking Banana

**.025" SQ SOCKETS CABLES** (Illustration NOT to Scale)

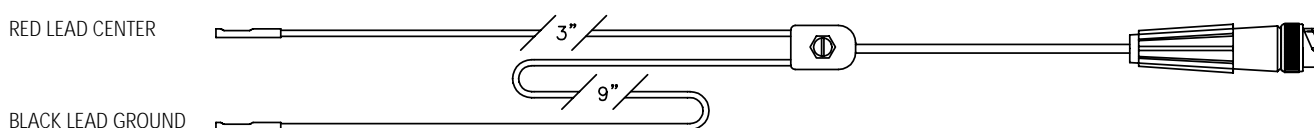

CABLE WITH .025" SQ SOCKETS P/N 9205 H/S

Part No.	Cable	Center	Ground
<b>1034</b> -(lgth)	RG58C/U	.025" SQ.	.025" SQ.
<b>2034</b> -(lgth)	MIC	.025" SQ.	.025" SQ.
<b>4034</b> -(lgth)	RG174/U	.025" SQ.	.025" SQ.