


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:  
INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.  
CONTACT: ANACONDA 7021 OR BOILCAT C97.  
GOLD PLATED.  
SOCKET: BRASS, TIN PLATED.

2. PERFORMANCE:  
MAXIMUM CURRENT: 7.5 AMPS  
MAXIMUM VOLTAGE: 300 V  
MAXIMUM TEMPERATURE: 122°F (50°C)

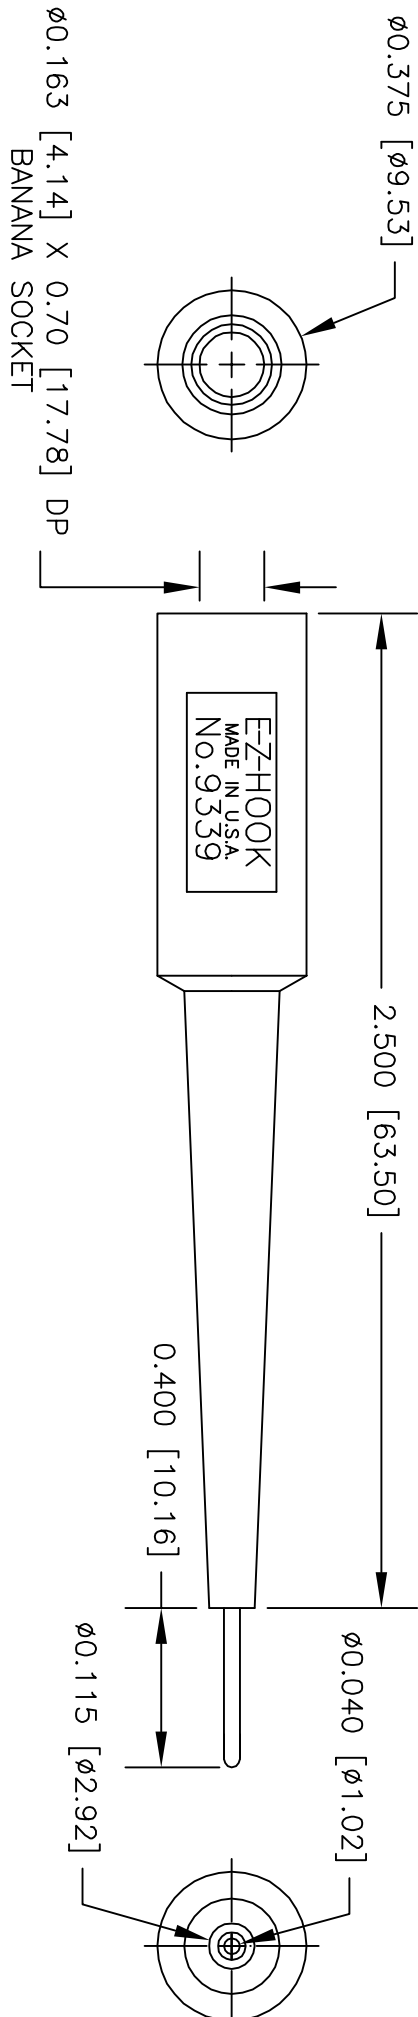

REVISIONS		DATE	APPROVED
LTR			

CONTRACT NO.		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
± .XX ±	±	DRAWN	DATE
± .XXX ±	±	R.L.	3/09
MATERIAL SEE NOTE.		DESCRIPTION	
FINISH SEE NOTE.		E-Z-FLEX BAN SKT TO 0.040 [1.02] PIN ADAPTER (20AWG)	
USED ON		SIZE CODE IDENT NO. DRAWING NO.	
APPLICATION		A 08505 9339	
DO NOT SCALE DRAWING		SCALE 2:1	
		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.