

GenSPEED® 5000 Category 5e Screened Cable

Features And Benefits

- Foil shield reduces electromagnetic interference (EMI) for optimal performance
- TRU-Mark® print legend contains footage markings from 1000' to 0'

Applications

- 1000 BASE-T (Gigabit Ethernet)
- E52/155 Mbps ATM
- E100/10 BASE-T (IEEE 802.3)
- 4/16 Mbps Token Ring (IEEE 802.5)
- T1
- Voice

Standard Compliances

- ANSI/TIA/EIA 568 B (Category 5e)
- ANSI/ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMP for Plenum
- NEC/CEC Type CMR for Non-Plenum
- RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Plenum: Fluoropolymer
- Non-Plenum: Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Core Tape

- Polyester

Drain Wire

- 24 AWG stranded (7/32) solid tinned copper

Shield

- Polyester-backed aluminum foil (aluminum side in)

Jacket

- Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.250	0.225
Nominal Cable Weight (lbs/1000ft)	36	32
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
Blue	2133496E	2131611E
White	2133774E	2131778E
Yellow	2133777E	2131777E
Gray	2133495E	2131673E
Red	2133778E	2131774E
Orange	2133776E	2131776E
Green	2133775E	2131775E
Black	2133779E	2131779E


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR (min)	ACR (min)	Attenuation (max)	PSNEXT (min)	NEXT (min)	PSELFEXT (min)	ELFEXT (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	—
200	—	—	32.4	27.8	30.8	14.8	17.8	—
250	—	—	36.9	26.3	29.3	12.8	15.8	—
300	—	—	41.0	25.1	28.1	11.3	14.3	—
350	—	—	44.9	24.1	27.1	9.9	12.9	—

Note: Values are expressed in dB per 100m (328 ft.) length. Values above 100 MHz are for information only.

GenSPEED® 5000 CATEGORY 5e SCREENED CROSS-SECTION

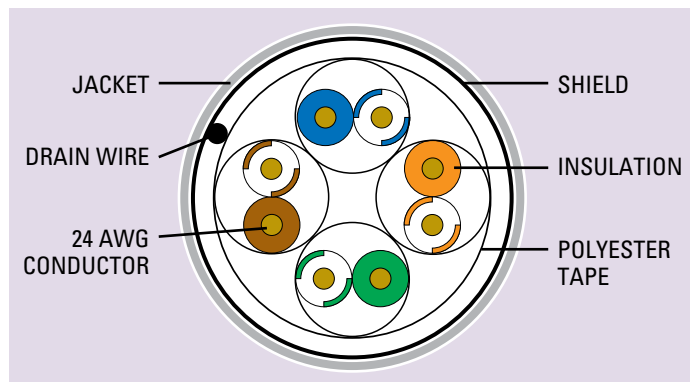

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100m (328ft) @ 20°C	9.38
Mutual Capacitance (nom) pF/ft @ 1 KHz	14
Delay Skew (max) ns/100m	45
Propagation Delay (max) ns @ 100 MHz	538
Nom. Velocity of Propagation (NVP) % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f):	Ohms 1-100 MHz 100 ± 15