


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 26800, MK	06/20/17	MK

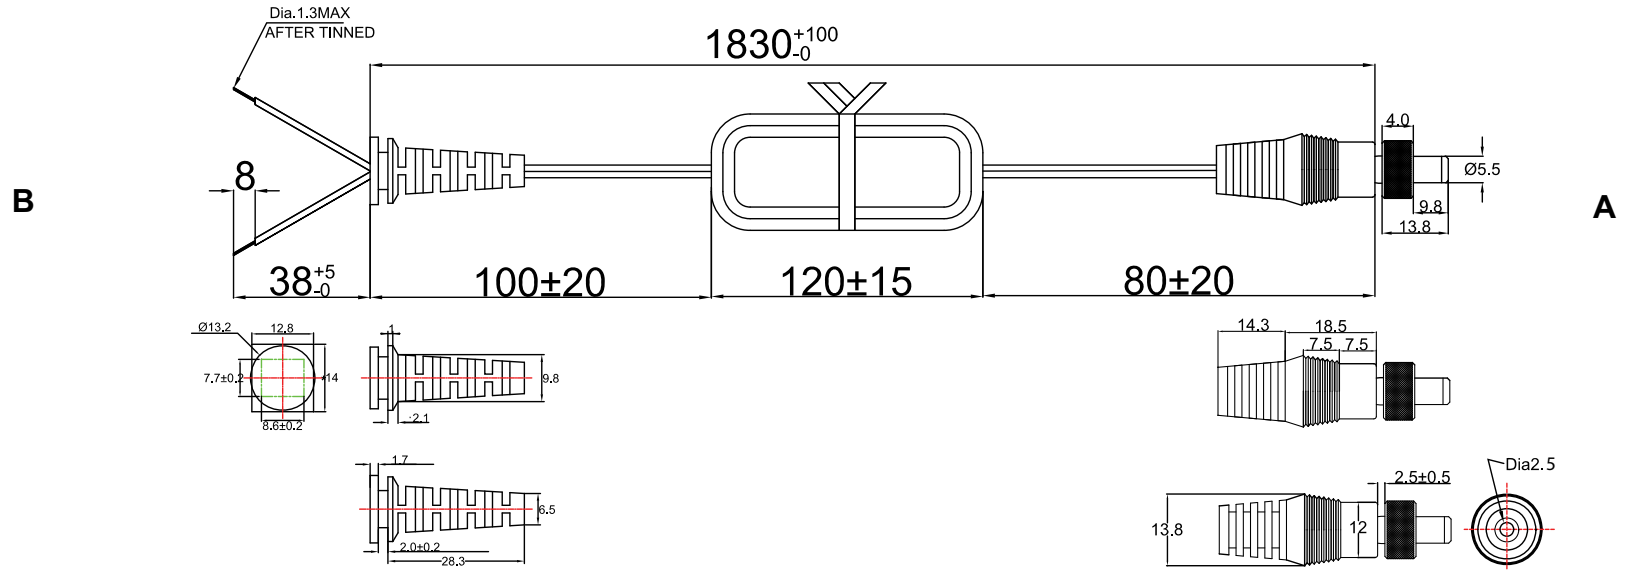

GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: SPT-1, 18 AWG X 2, STRANDED WIRE
 300V, 105°C RATED, PVC JACKET

CABLE JACKET COLOR: BLACK


POLARITY: IDENTIFIED CONDUCTOR (WORDS)
 IS TO BE CONNECTED TO CENTER OF BARREL

OVERALL LENGTH : 1830 +100, -0 mm

CABLE OUTER DIAMETER: 2.7 x 5.4 ± 0.1 mm

END 'A' TERMINATION: LOCKING FEMALE BARREL 5.5 x 2.5 mm
 WITH THUMB SCREW 4.0 mm

END 'B' TERMINATION: STRIPPED AND TINNED

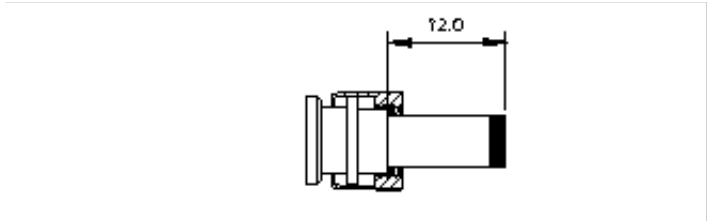

PACKING:
 BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

RELEASED
 By N.Frost at 12:35 pm, Jun 21, 2017

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: MK	DATE: 06/20/17	FSCN No.: G, CC	SIZE: A	DWG TITLE: LOW VOLTAGE DC CORDSET LOCKING FEMALE BARREL 2.5 mm ID W/4.0 mm THUMB SCREW
DRAWN: NF	DATE: 06/20/17	SCALE: NONE		REV. A
APRVD: MK	DATE: 06/20/17	PART NO: LLPSPT11M800SR(R)		SHEET 1/1