



UF4001 thru UF4007


Glass Passivated High Efficient Rectifiers
Reverse Voltage 50 to 1000 Volts Forward Current 1.0 Ampere

Features

- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- ◆ Ultrafast recovery time for high efficiency
- ◆ Excellent high temperature switching
- ◆ Soft recovery characteristics
- ◆ Glass passivated junction
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension



DO-204AL (DO-41)

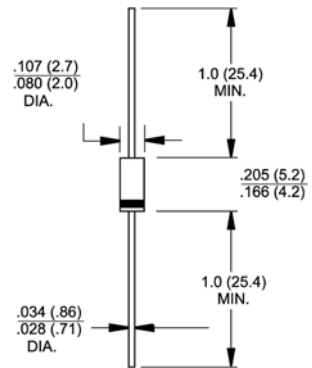

Dimensions in inches and (millimeters)

Mechanical Data

- ◆ Case: JEDEC DO-204AL(DO-41) molded plastic body over passivated chip
- ◆ Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: Color band denotes cathode end
- ◆ Mounting Position: Any
- ◆ Weight: 0.012 ounce, 0.34 gram

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	UF4001	UF4002	UF4003	UF4004	UF4005	UF4006	UF4007	Units	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{F(AV)}$	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0							Amps	
Maximum instantaneous forward voltage at 1.0A (Note 2)	V_F	1.0				1.7				Volts
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=100^\circ\text{C}$	I_R					10.0 50				μA
Maximum reverse recovery time $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_r=0.25\text{A}$	t_{rr}	50				75				nS
Typical junction capacitance at 4.0V, 1MHz	C_j					17				pF
Typical thermal resistance (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$					60 15				$^\circ\text{C/W}$
Operating junction temperature range	T_J					-55 to +150				$^\circ\text{C}$
Storage temperature range	T_{STG}					-55 to +150				$^\circ\text{C}$

- Notes:**
1. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length
 2. Pulse test: 300us pulse width, 1% duty cycle

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

