



DIMENSIONS:	
A	3.750" ±0.063
B	4.188" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	3.063" ±0.063
G	0.203" x 0.375" ±0.015

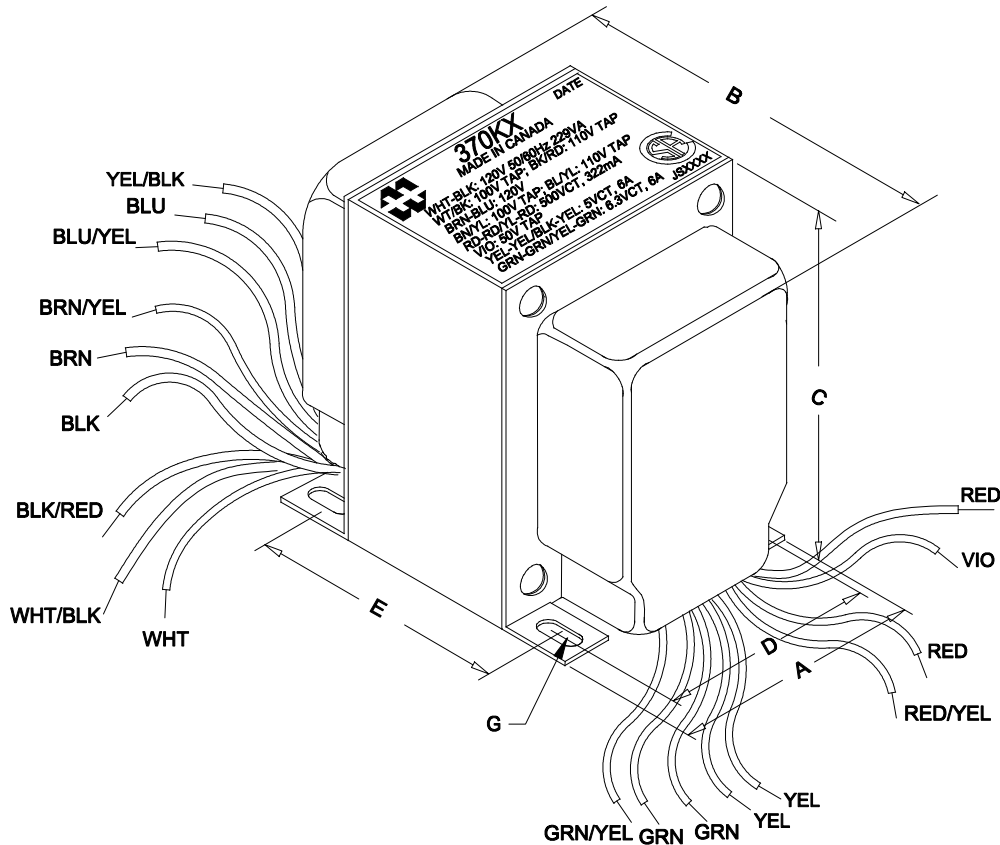

NOTE: ALL LEADS 8" OUT MIN.

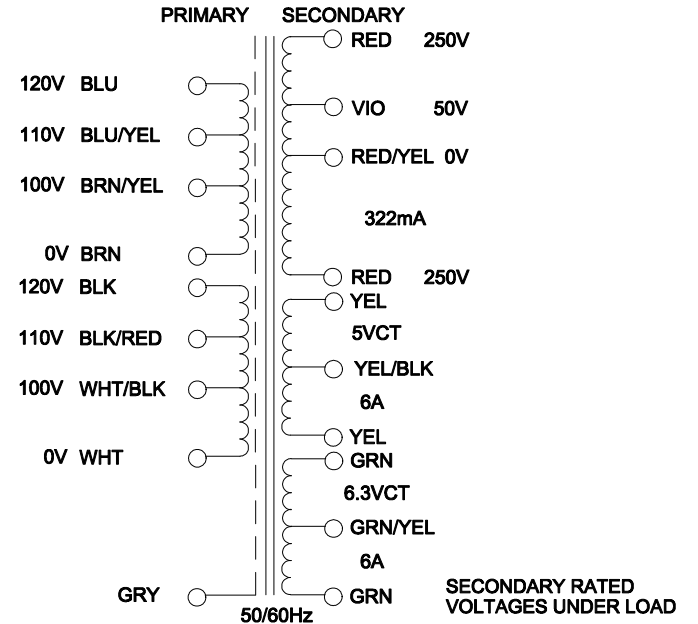

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, WHT - BLK	232mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	528.0V ±2%
	RED - RED/YEL = RED/YEL - RED =	264.0V ±2%
	RED/YEL - VIO =	52.80V ±2%
	YEL - YEL =	5.280V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.640V ±2%
	GRN - GRN =	6.720V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.360V ±2%
DCR	@ 20°C, WHT - BLK =	2.501 Ω ±20%
	@ 20°C, BRN - BLU =	2.726 Ω ±20%
	@ 20°C, RED - RED =	42.43 Ω ±20%
	@ 20°C, YEL - YEL =	0.022 Ω ±20%
	@ 20°C, GRN - GRN =	0.030 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181
0	RELEASED.	01/19/10	MANUFACTURING™				FAX # (519) 886-9540
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 370KX	
			DATE: 01/19/10	APP'D. BY:			
				DIMENSIONS: IN(X) MM()			