
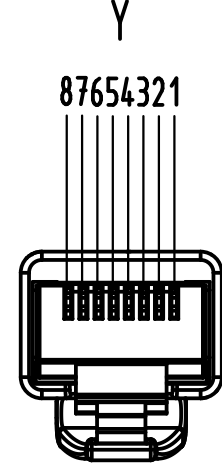
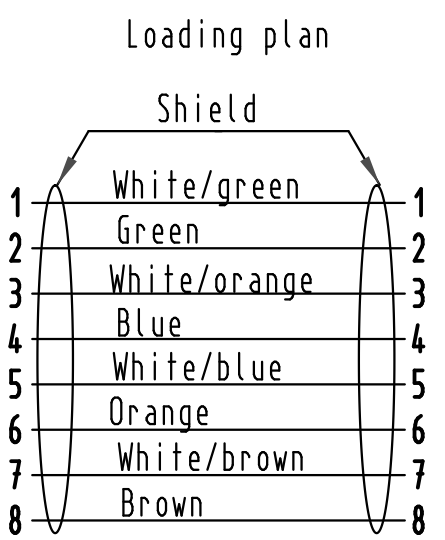


Mating face RJ45 according to IEC 60603-7

RJ45 cable 8AWG 26/7, Cat5e PUR

protection Latch yellow

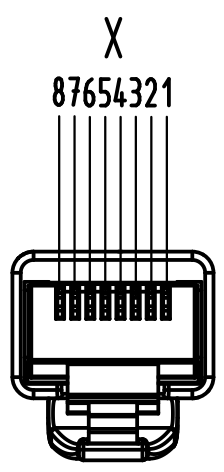

25	09 47 47 47 025	4x2AWG 26/7 SF/UTP Cat.5e PUR	25.0 (±0.250) m
24	09 47 47 47 023	4x2AWG 26/7 SF/UTP Cat.5e PUR	20.0 (±0.200) m
23	09 47 47 47 022	4x2AWG 26/7 SF/UTP Cat.5e PUR	15.0 (±0.150) m
22	09 47 47 47 021	4x2AWG 26/7 SF/UTP Cat.5e PUR	10.0 (±0.100) m
21	09 47 47 47 020	4x2AWG 26/7 SF/UTP Cat.5e PUR	9.0 (±0.090) m
20	09 47 47 47 019	4x2AWG 26/7 SF/UTP Cat.5e PUR	8.0 (±0.080) m
19	09 47 47 47 018	4x2AWG 26/7 SF/UTP Cat.5e PUR	7.5 (±0.075) m
18	09 47 47 47 017	4x2AWG 26/7 SF/UTP Cat.5e PUR	7.0 (±0.070) m
17	09 47 47 47 016	4x2AWG 26/7 SF/UTP Cat.5e PUR	6.0 (±0.060) m
16	09 47 47 47 015	4x2AWG 26/7 SF/UTP Cat.5e PUR	5.0 (+0.070) m
15	09 47 47 47 014	4x2AWG 26/7 SF/UTP Cat.5e PUR	4.0 (+0.070) m
14	09 47 47 47 024	4x2AWG 26/7 SF/UTP Cat.5e PUR	3.5 (+0.070) m
13	09 47 47 47 013	4x2AWG 26/7 SF/UTP Cat.5e PUR	3.0 (+0.070) m
12	09 47 47 47 012	4x2AWG 26/7 SF/UTP Cat.5e PUR	2.5 (+0.070) m
11	09 47 47 47 011	4x2AWG 26/7 SF/UTP Cat.5e PUR	2.0 (+0.070) m
10	09 47 47 47 010	4x2AWG 26/7 SF/UTP Cat.5e PUR	1.5 (+0.070) m
9	09 47 47 47 009	4x2AWG 26/7 SF/UTP Cat.5e PUR	1.0 (+0.070) m
8	09 47 47 47 008	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.9 (+0.070) m
7	09 47 47 47 007	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.8 (+0.070) m
6	09 47 47 47 006	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.7 (+0.070) m
5	09 47 47 47 005	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.6 (+0.070) m
4	09 47 47 47 004	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.5 (+0.070) m
3	09 47 47 47 003	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.4 (+0.070) m
2	09 47 47 47 002	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.3 (+0.070) m
1	09 47 47 47 001	4x2AWG 26/7 SF/UTP Cat.5e PUR	0.2 (+0.070) m

Cont. no.	Part-No.	Type of cable	Dim. a
-----------	----------	---------------	--------

For lengths < 1.0m:
 - relative positioning of the connectors to each other will be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°
 For lengths > 1.0m:
 -relative positioning of the connectors to each other not obligatory
 -Transmission properties in accordance with IEC 61935-2 Cat.5e
 -Protection level: IP20

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
			Dat. Name		Maßstab/Scale		RJ45 cord, 2xRJ45 overmoulded, 4x2xAWG 26/7, Cat.5e, PUR, 1:1	
			Detail. 13.11.08 MR		2:1			
			Insp. 13.11.08 RA					
DRS434C 06.05.09 MR			Stand.				TB 09 47 47 47 0xx	
35586 12.12.08 MR			HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP				Blatt/ page	
35041			Mod. Dat. Name		Sub.			

Alle Rechte vorbehalten/ All rights reserved