


746-137 TO 162



D-Sub

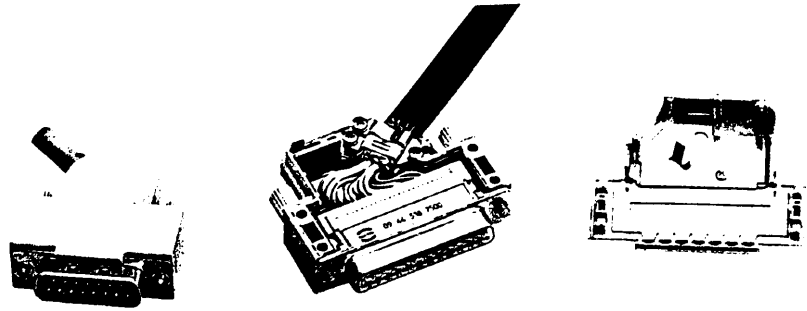

Hoods for screw locking, accessories and tooling

Dimensions in mm

Identification	No. of contacts	Part No.	Drawing																									
Hood ¹⁾ Thermoplastic grey RAL 7032	9	09 67 009 0571																										
	15	09 67 015 0571																										
	25	09 67 025 0571																										
	37	09 67 037 0571																										
	50	09 67 050 0571																										
Thermoplastic grey with internal tin-plate screening	9	09 67 009 0573																										
	15	09 67 015 0573																										
	25	09 67 025 0573																										
	37	09 67 037 0573																										
	50	09 67 050 0573																										
9-37 way for packaging density of 3 TE (15.24 mm)			<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> <tr> <th>max.</th> <td>39.62</td> <td>33.3</td> <td>15</td> <td>Ø 9</td> </tr> <tr> <td>25</td> <td>53.52</td> <td>47</td> <td>15</td> <td>Ø 11</td> </tr> <tr> <td>37</td> <td>69.8</td> <td>63.5</td> <td>15</td> <td>Ø 11</td> </tr> <tr> <td>50</td> <td>67.41</td> <td>61.1</td> <td>19</td> <td>Ø 14.5</td> </tr> </thead> </table>		a	b	c	d	max.	39.62	33.3	15	Ø 9	25	53.52	47	15	Ø 11	37	69.8	63.5	15	Ø 11	50	67.41	61.1	19	Ø 14.5
		a		b	c	d																						
max.	39.62	33.3	15	Ø 9																								
25	53.52	47	15	Ø 11																								
37	69.8	63.5	15	Ø 11																								
50	67.41	61.1	19	Ø 14.5																								
Knurled Screw for hoods Thread UNC Thread M3	9-50	09 67 000 9971 ⁴⁾																										
		09 67 001 9965*																										
Bench press for assembly of hoods and termination of insulation displacement connectors		09 99 000 0114																										
Tooling for assembly of hoods Top part Bottom part		09 99 000 0215*																										
		09 99 000 0216*																										

2) Before assembling the hood, the knurled screws must be inserted into the lower hood part.
3) For retained nut when using slide lock or female screw lock.

Grey head / Tinned metal part
5) Screw driver type ISO PH 1 for philips screw N° 1 ISO norm 4757

¹⁾ Order knurled screw separately
* Not normally kept in stock