


# Customer Information Sheet

DRAWING No. D26XX-XX SHEET 2 OF 2 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

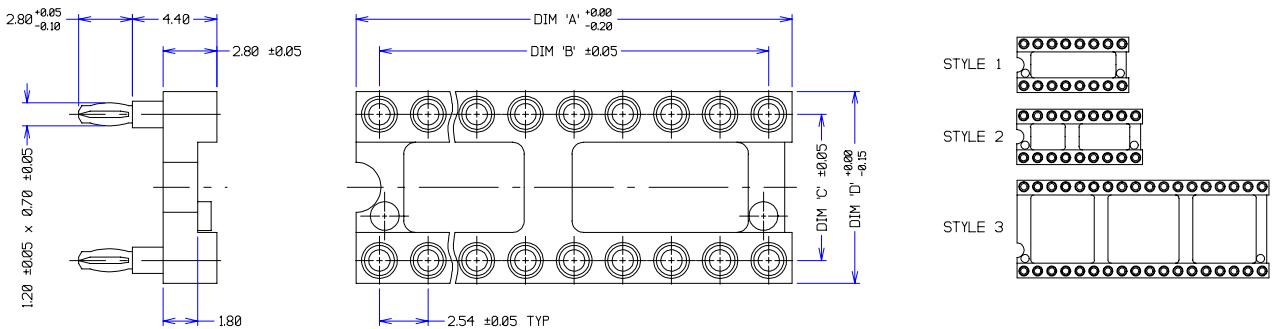

ORDER CODE:

D26XX-XX

No. OF WAYS (SEE TABLE)

FINISH:

Ø1 - TIN/LEAD SHELL, GOLD CLIP

T6 - TIN/LEAD SHELL, TIN/LEAD CLIP

NOTES:  
 1. RECOMMENDED HOLE SIZE =  $\varnothing 1.09-0.94\text{mm}$ .  
 RECOMMENDED BOARD THICKNESS = 1.5 TO 2.0mm.

SPECIFICATIONS:

MATERIAL:  
 MOULDING = GLASS-FILLED POLYESTER UL94V-0  
 CONTACT SHELL = BRASS  
 CONTACT CLIP = BERYLLIUM COPPER

FINISH:  
 Ø1 - SHELL = 5µ 90/10 TIN/LEAD OVER 2-3µ NICKEL  
 CLIP = 0.25µ GOLD OVER 2-3µ NICKEL  
 T6 - SHELL = 5µ 90/10 TIN/LEAD OVER 2-3µ NICKEL  
 CLIP = 5µ 90/10 TIN/LEAD OVER 2-3µ NICKEL

HARWIN PART No.	No. OF WAYS	STYLE	DIM 'A'	DIM 'B'	DIM 'C'	DIM 'D'
D2606-XX	6	1	7.6	5.08	7.62	10.02
D2608-XX	8	1	10.1	7.62	7.62	10.02
D2614-XX	14	1	17.17	15.24	7.62	10.02
D2616-XX	16	1	20.3	17.78	7.62	10.02
D2618-XX	18	2	22.8	20.32	7.62	10.02
D2620-XX	20	2	25.3	22.86	7.62	10.02
D2622-XX	22	2	27.8	25.40	10.16	12.56
D2624-XX	24	2	30.4	27.94	15.24	17.64
D2628-XX	28	2	35.5	33.02	15.24	17.64
D2632-XX	32	2	40.6	38.10	15.24	17.64
D2640-XX	40	3	50.6	48.26	15.24	17.64

ELECTRICAL:  
 CURRENT RATING = 1 AMP  
 VOLTAGE RATING = 100V AC, 150V DC  
 CONTACT RESISTANCE = 10 MILLIOHMS MAX  
 INSULATION RESISTANCE = 10,000 MEGOHMS MIN  
 DIELECTRIC WITHSTANDING = 1000V AC MIN

MECHANICAL:  
 INSERTION FORCE = 30N MAX ( $\varnothing 0.46\text{mm}$  GAUGE)  
 WITHDRAWAL FORCE = 0.3N MIN ( $\varnothing 0.46\text{mm}$  GAUGE)  
 SOLDERABILITY = 260°C FOR 5 SECONDS  
 DURABILITY = 100 CYCLES

ENVIRONMENTAL:  
 TEMPERATURE RANGE = -55°C TO +125°C

PACKING:  
 TUBE

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C004XX (LATEST ISSUE).

2	03.12.97	4185
1	27.08.97	----
ISS.	DATE	C/N
APPROVED:		
CHECKED:		
DRAWN: D. BECK		
CUSTOMER REF.		
ASSEMBLY DRG.		

<b>HARWIN</b>			TOLERANCES X = ±1mm XX = ±0.25mm XXX = ±0.10mm XXXX = ±0.01mm ANGLES ±1° UNLESS STATED	MATERIAL: SEE ABOVE	TITLE: DIL IC SOCKET OPEN FRAME, PRESS-FIT
HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0056	HARWIN PLC UK TEL: 01705 370451 FAX: 01705 314590	HARWIN PTE SINGAPORE TEL: 65 7794909 FAX: 65 7793868	FINISH: SEE ABOVE	S/AREA: mm²	DRAWING NUMBER: D26XX-XX