
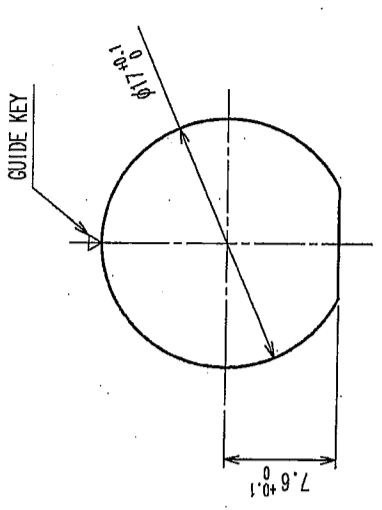
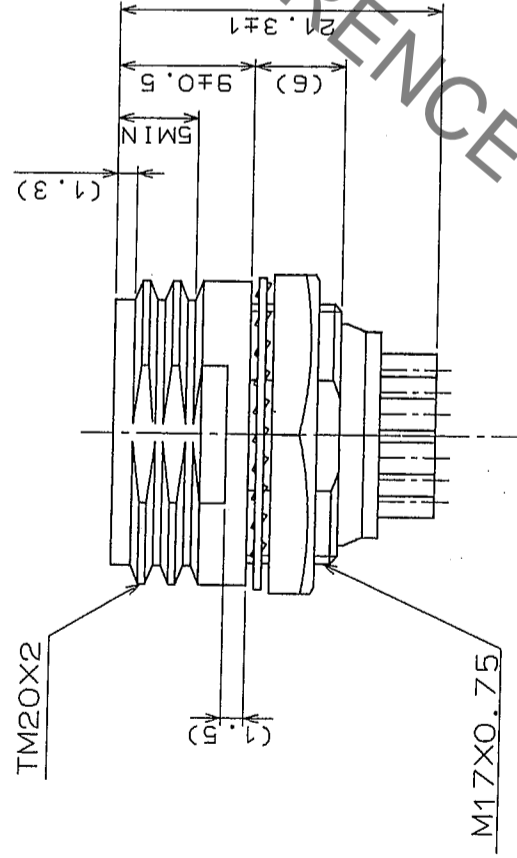
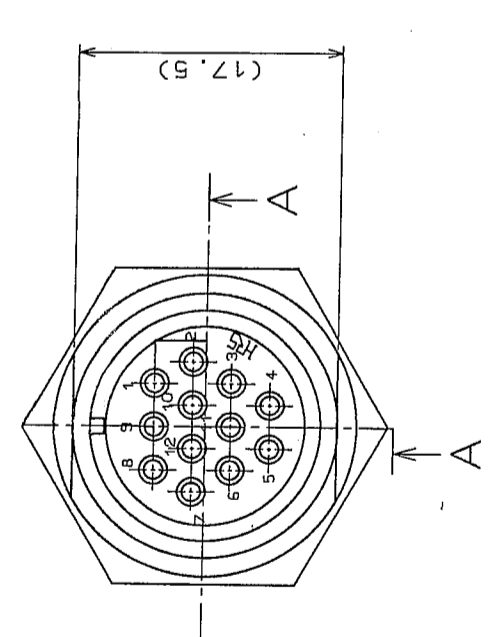


Oct.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 2 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1					1				
2					2				
3					3				
4					4				
5					5				
6					6				

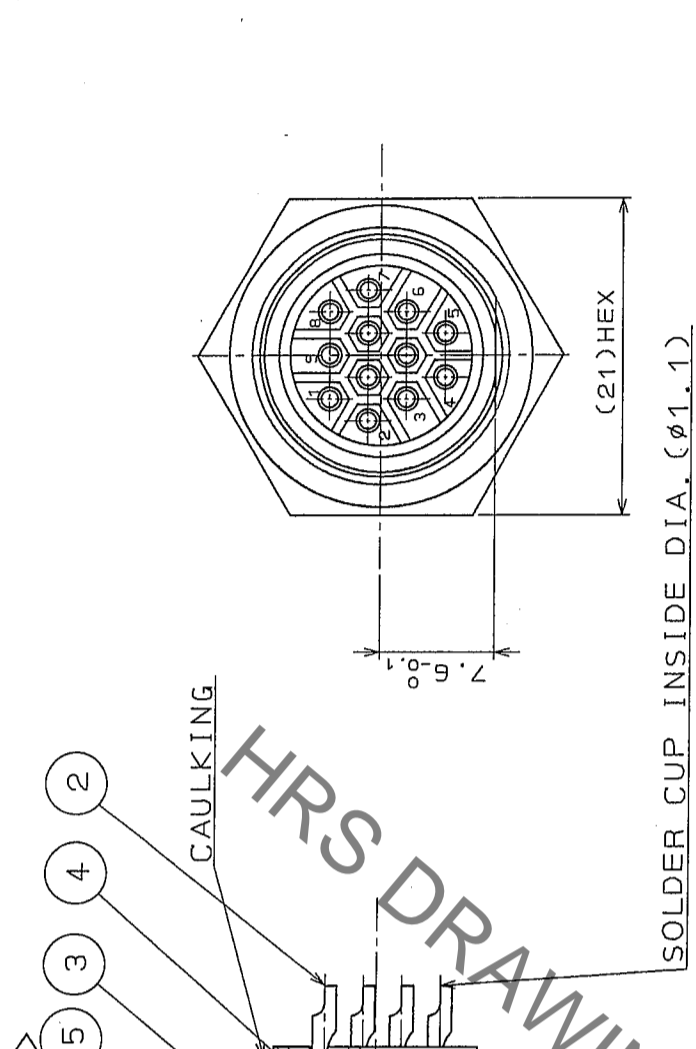

PANEL CUTOUT
 t:0.5~2

NOTE [1] THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑤ : 3 TO 4 N · m.
 LOCTITE 242, LOCTITE OR EQUIVALENT IS RECOMMENDED TO
 PREVENT REF NO. ⑤ FROM LOOSENING.

3	DIALLYL PHTHALATE (BLACK)	UL 94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5μm min.	5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH CHROME PLATE	4	DIALLYL PHTHALATE (BLACK)	UL 94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		Y. Yamada	Y. Yamada	H. Zembu	M. Sato
		05.09.12	05.09.12	05.09.17	05.09.20
		PART NO.		RELEASED	
		EDC3-007495-71		RM15TRD-12S (71)	
SCALE		DRAWING NO.		PART NO.	
2 : 1		EDC3-007495-71		RM15TRD-12S (71)	
UNITS		DRAWING NO.		PART NO.	
m/m		EDC3-007495-71		RM15TRD-12S (71)	
		HRS HIROSE ELECTRIC CO., LTD.		CODE NO.	
		HRS		CL109-0663-3-71	
				FORM NO. 225	

TO	
R	