

# General Accessories

## Drip Shields, Hole Seals, and Paint



### Drip Shield Kit for Type 12 Enclosures

Protects door hardware from dripping water and settling dust. Attaches quickly and easily to the enclosure with stainless steel screws and sealing washers (hardware is furnished). Stainless steel hinge pin and stainless steel door clamping assemblies are furnished to replace the standard hinge pin and door clamping assemblies. A tube of sealing compound is also supplied with each kit. Manufactured from 14 gauge steel with an ANSI 61 gray polyester powder finish over phosphatized surfaces.

Drip Shield Kits can be made on special order for other Hoffman enclosures. Consult factory for information.

Product maintains UL/CSA Type 12 when properly installed on a Hoffman enclosure.

### Drip Shield Kits For Single-Door Wall-Mount Enclosures

Catalog Number	Fits Enclosure Size B
ADK12A	12.00 (305)
ADK16A	16.00 (406)
ADK20A	20.00 (508)
ADK24A	24.00 (610)
ADK30A	30.00 (762)
ADK36A	36.00 (914)

### Drip Shield Kits For Two-Door Floor-Mount Enclosures

Catalog Number	Fits Enclosure Size B
ADK42A	42.00 (1067)
ADK48A	48.00 (1219)
ADK60A	60.00 (1524)
ADK72A	72.00 (1829)

These kits are not designed for use on 48.00-inch (1219mm) wide and 60.00-inch (1524mm) wide Two-Door Type 12 Wall-Mount Enclosures.



### Stainless Steel Drip Shield Kit for Type 4 and 4X Enclosures


Can be easily installed on Type 4 and 4X enclosures (excluding quick-release latch models). Protects door hardware from dripping water and settling dust. Attaches quickly and easily to the enclosure with stainless steel screws and sealing washers (furnished). A tube of sealing compound is supplied with each kit. Manufactured from 14 gauge Type 316 stainless steel.

Stainless Steel Drip Shield Kits can be made on special order for other Hoffman enclosures. Consult factory for information.

Product maintains UL/CSA Type 4, Type 4X, and Type 12 when properly installed on a Hoffman enclosure.

### Stainless Steel Drip Shield Kit

Catalog Number	Fits Enclosure Size B
ADK12SS6	12.00 (305)
ADK16SS6	16.00 (406)
ADK20SS6	20.00 (508)
ADK24SS6	24.00 (610)
ADK30SS6	30.00 (762)
ADK36SS6	36.00 (914)

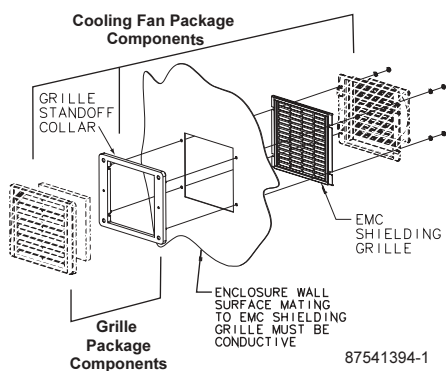

### EMC Upgrade Kit

With the addition of this kit, the cooling fan package and exhaust grille are upgraded to provide EMC (electromagnetic compatibility) protection. Consult Hoffman for shielding effectiveness (dB attenuation vs. frequency).

**Note:** Cooling fan package and exhaust grille must be ordered separately. See Thermal Management, Chapter 9.

Catalog Number	Fits Cooling Fan Package Catalog No.	Fits Exhaust Grille Catalog Number
T4EMC	TFP41/TFP42	TEP4
T6EMC	TFP61/TFP62	TEP6
T10EMC	TFP101/TFP102	TEP10



**Hol-Tite® Oil Tight Hole Seals**

Extra pushbutton holes, conduit openings, and knockout openings are sealed against dust, dirt, oil, and water with Hoffman Hol-Tite® Seals. Seals will cover any size or shape of

hole from .19-inch diameter to maximum diameter shown in table. Can be used on enclosure walls up to .31-inch thick.

**Steel Hole Seals**

- 12 sizes
- ANSI 61 gray polyester powder paint finish over galvanizing
- Galvanized 16 gauge steel back plate
- Stud (#10-32 x 5/8) and wing nut are zinc plated
- Oil resistant gasket
- UL Component Recognized Type 3R, Type 4, Type 12, and Type 13
- CSA Type 3R, Type 4, Type 12, and Type 13

**Stainless Steel Hole Seals**

- 8 sizes
- Polished front surface
- Seal, backplate, stud (#10-24 x 5/8) and wing nut are 300 series stainless steel
- 16 gauge stainless steel backplate
- Oil resistant gasket
- UL Component Recognized Type 3R, Type 4, Type 4X, Type 12, and Type 13
- CSA Type 3R, Type 4, Type 4X, Type 12, and Type 13



Steel Catalog Number	Stainless Steel Catalog Number	For	Maximum Hole Diameter	Hol-Tite Diameter
ASPBG	ASPBGSS	22.5mm oil-tight pushbutton holes	0.88 (22)	1.22 (31)
AS050	AS050SS	1/2-inch conduit holes	0.88 (22)	1.38 (35)
AS075	AS075SS	3/4-inch conduit holes	1.06 (27)	1.56 (40)
ASPB	ASPBSS	30.5mm oil-tight pushbutton holes	1.25 (32)	1.75 (44)
AS100	AS100SS	1-inch conduit holes	1.38 (35)	1.88 (48)
AS125	AS125SS	1 1/4-inch conduit holes	1.69 (43)	2.19 (56)
AS150	AS150SS	1 1/2-inch conduit holes	2.00 (51)	2.50 (64)
AS200	AS200SS	2-inch conduit holes	2.50 (64)	3.00 (76)
AS250	—	2 1/2-inch conduit holes	3.00 (76)	3.50 (89)
AS300	—	3-inch conduit holes	3.62 (92)	4.12 (105)
AS350	—	3 1/2-inch conduit holes	4.12 (105)	4.62 (117)
AS400	—	4-inch conduit holes	4.62 (117)	5.12 (130)



**Touch-Up Paint**

Hoffman Touch-Up Paint is used to repair the finish of enclosures and panels. Furnished in 12oz. spray cans.

Catalog Number	Color
ATPGRAYX	Gray Epoxy
ATPOSA	OSHA Orange Enamel
ATPHE	Gray Hammeritone Enamel
ATPWE	White Enamel
ATPSG	Gray Enamel
ATPHSGP	High Solids Gray
ATPPY61	ANSI 61 Gray for Polyester Powder
ATPDLB	DesignLine Beige Enamel
ATPDLBR	DesignLine Dark Brown Enamel
ATPMG	Light Gray for Polyester Powder
ATPHS61	High Solids ANSI 61 Gray
ATPFG	Light Gray for fiberglass
ATPG7035	RAL 7035 Gray
ATPG7032	RAL 7032 Gray
ATPB7021	RAL 7021 Black
ATPB9005	RAL 9005 Black