

International  
**IR** Rectifier  
 SCHOTTKY RECTIFIER  
 HIGH EFFICIENCY SERIES

PD-93950D

30CLJQ150  
 JANS1N7058CCU3  
 JANTX1N7058CCU3  
 JANTXV1N7058CCU3

30Amp, 150V  
 Ref: MIL-PRF-19500/731


**Major Ratings and Characteristics**

Characteristics	1N7058CCU3	Units
$I_{F(AV)}$	30	A
$V_{RRM}$ (Per Leg)	150	V
$I_{FSM}$ @ $t_p = 8.3ms$ half-sine (Per Leg)	130	A
$V_F$ @ 15Apk, $T_J = 125^\circ C$ (Per Leg)	0.85	V
$T_J, T_{stg}$ Operating and storage	-65 to 150	$^\circ C$

**Description/Features**

The 1N7058CCU3 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of high reliability environments. It is packaged in the hermetic surface mount SMD-0.5 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source control drawings to TX, TXV and S quality levels.

- Hermetically Sealed
- Center Tap
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long term Reliability
- Surface Mount
- Lightweight
- ESD Rating: Class 1B per MIL-STD-750, Method 1020

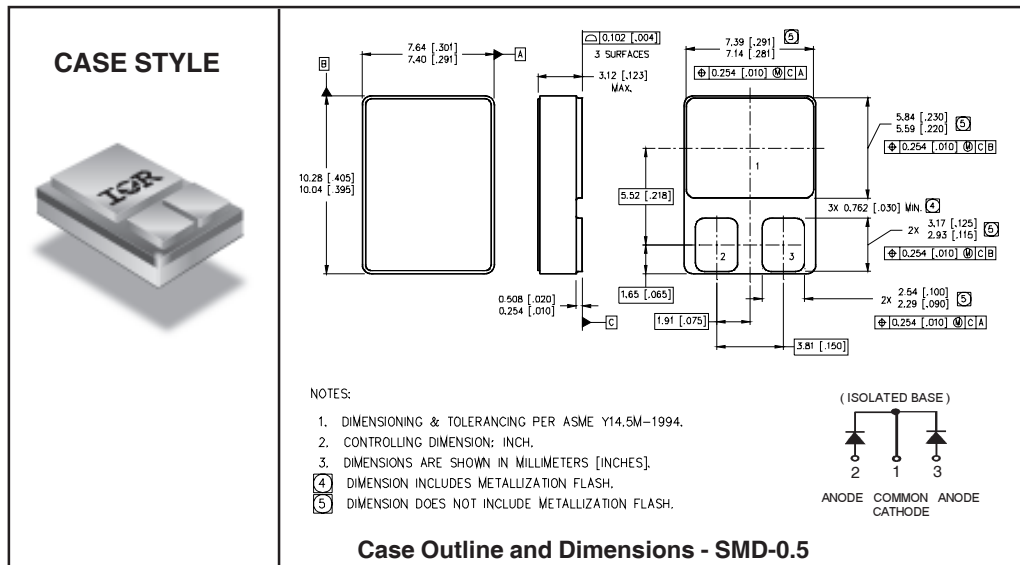

www.irf.com

**Voltage Ratings**

Part number	1N7058CCU3
$V_R$ Max. DC Reverse Voltage (V) (Per Leg)	150
$V_{RWM}$ Max. Working Peak Reverse Voltage (V) (Per Leg)	

**Absolute Maximum Ratings**

Parameters	Limits	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) See Fig. 5	15	A	50% duty cycle @ $T_C = 92^\circ\text{C}$ , square waveform
$I_{FSM}$ Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	130	A	@ $t_p = 8.3\text{ms}$ half-sine

**Electrical Specifications**

Parameters	Limits	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) See Fig. 1①	1.06	V	@ 7.5A $T_J = -55^\circ\text{C}$
	1.23	V	@ 15A
	1.05	V	@ 7.5A $T_J = 25^\circ\text{C}$
	1.20	V	@ 15A
	0.72	V	@ 7.5A $T_J = 125^\circ\text{C}$
$I_{RM}$ Max. Reverse Leakage Current (Per Leg) See Fig. 2①	0.02	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	7.0	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max. Junction Capacitance (Per Leg)	130	pF	$V_R = 5V_{DC}$ (1MHz, $25^\circ\text{C}$ )
$L_S$ Typical Series Inductance (Per Leg)	4.8	nH	Measured from center of cathode pad to center of anode pad

**Thermal-Mechanical Specifications**

Parameters	Limits	Units	Conditions
$T_J$ Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-65 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Leg)	3.5	$^\circ\text{C}/\text{W}$	DC operation See Fig. 4
$R_{thJC}$ Max. Thermal Resistance, Junction to Case (Per Package)	1.75	$^\circ\text{C}/\text{W}$	DC operation
wt Weight (Typical)	1.0	g	
Die Size (Typical)	70X92	mils	
Case Style	SMD-0.5		

① Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

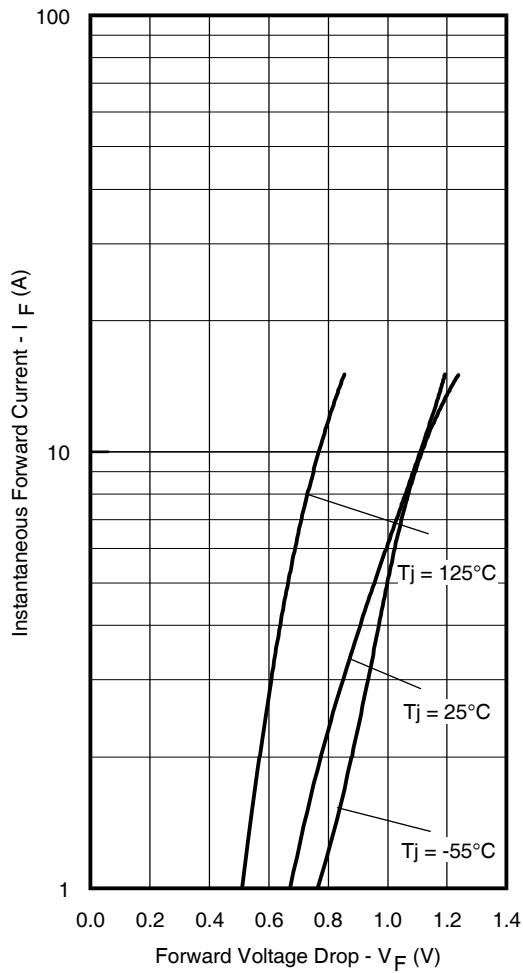


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

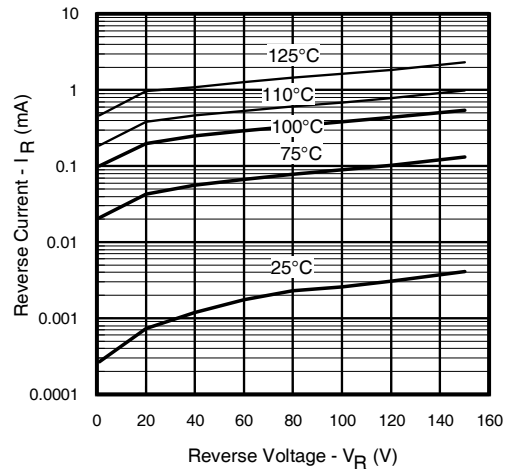


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

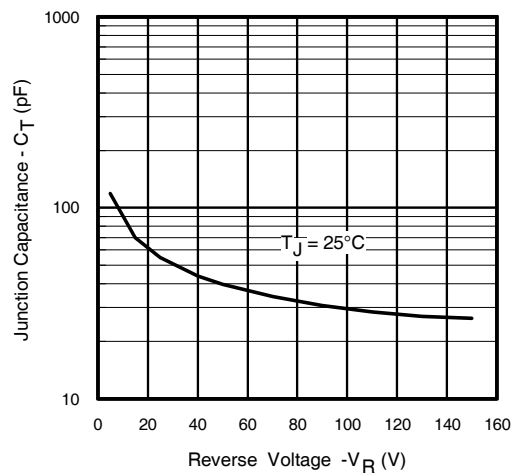


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

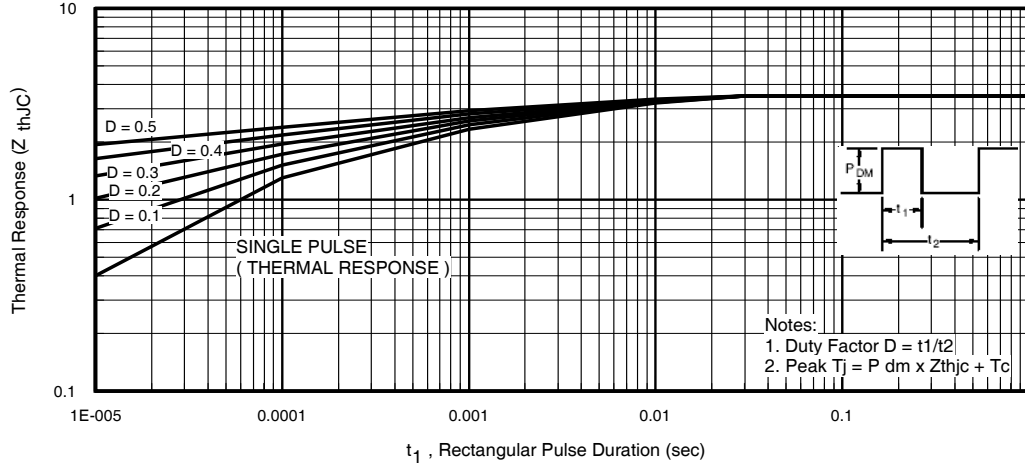


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

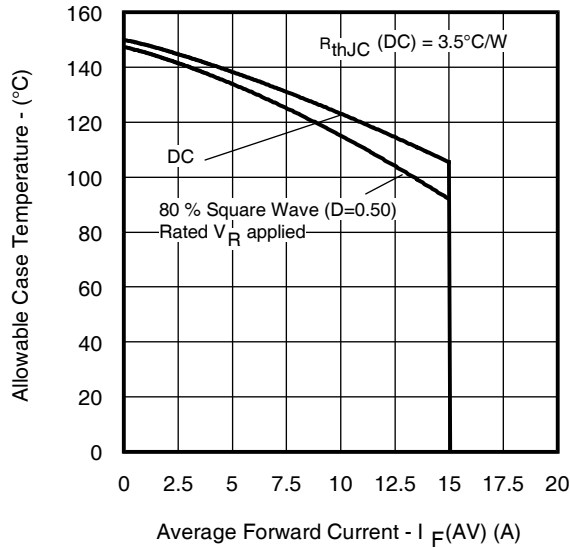


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)