

**Description**

- 2.0 x 1.2mm SMD crystal in a hermetically sealed ceramic package with an electron beam sealed metal lid. Suitable for real time clock applications.
- Model IQXC-25
- Model Issue number 3

**Frequency Parameters**

- Frequency 32.7680kHz
- Frequency Tolerance  $\pm 20.00$ ppm
- Tolerance Condition @ 25°C  $\pm 5^\circ\text{C}$
- Operating Temperature Range  $-40.00$  to  $85.00^\circ\text{C}$
- Overtone Order Fundamental
- Ageing  $\pm 3$ ppm max per year @ 25°C
- Frequency Stability Coefficient:  $-0.03/^\circ\text{C}^2$  typ
- Motional Capacitance (C1): 7fF typ

**Electrical Parameters**

- Load Capacitance (CL) 6.00pF
- Shunt Capacitance (C0) 1.3pF typ, 1.7pF max
- Drive Level 0.1 $\mu\text{W}$  $\pm 0.01\mu\text{W}$  recommended,  $\pm 1$
- ESR 90.00k $\Omega$  max

**Environmental Parameters**

- Storage Temperature Range:  $-40$  to  $85^\circ\text{C}$
- Shock: IEC 60068-2-27: 1000G, 1ms, 3 times in each of 3 mutually perpendicular planes.
- Vibration: IEC 60068-2-6: 1.5mm amplitude, 10Hz-55Hz, 1min in 3 mutually perpendicular planes, duration 2hrs each plane (total 6hrs).

**Manufacturing Details**

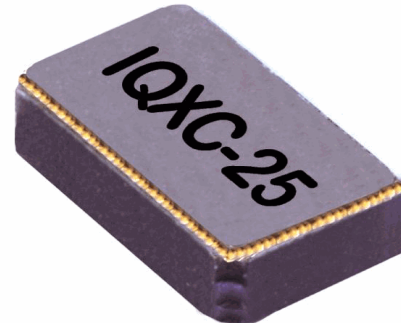
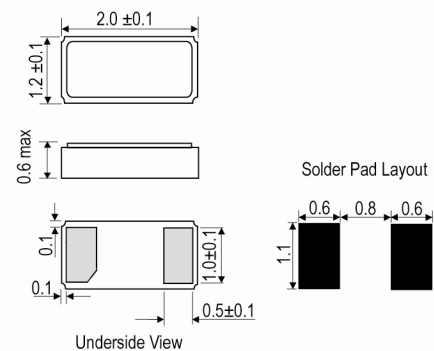
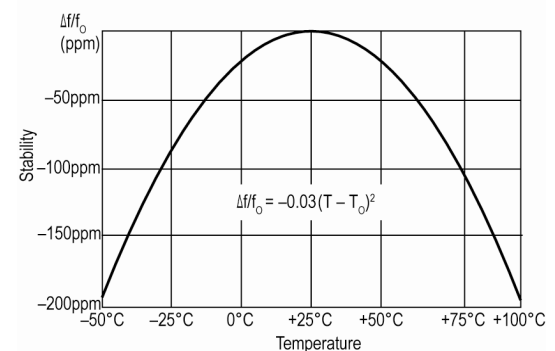
- Maximum Reflow Temperature:  $260^\circ\text{C}$  for 5secs max

**Compliance**

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

**Packaging Details**

- Pack Style: **Cutt** In tape, cut from a reel
- Pack Size: 100
- *Alternative packing option available*


**Outline (mm)**

**Typical Frequency Stability Characteristics**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
 Germany: 0800 1808 443

France: 0800 901 383  
 USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)