


KEMET, GF, EMI/RFI Filters, Noise Suppression, 250 VAC, 250 V, 5 A

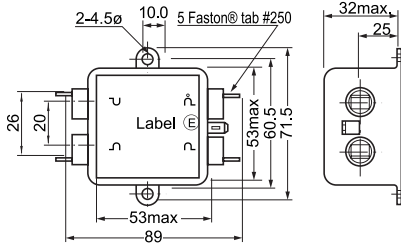

**Dimensions**

|          |            |
|----------|------------|
| <b>L</b> | 89mm NOM   |
| <b>W</b> | 71.5mm NOM |
| <b>H</b> | 32mm MAX   |

**Packaging Specifications**

|                            |           |
|----------------------------|-----------|
| <b>Packaging:</b>          | Tray, Box |
| <b>Packaging Quantity:</b> | 50        |
| <b>Weight:</b>             | 130 g     |

**General Information**

|                        |                                 |
|------------------------|---------------------------------|
| <b>Series:</b>         | GF                              |
| <b>Style:</b>          | Metal Box                       |
| <b>Description:</b>    | Noise Filters                   |
| <b>RoHS:</b>           | Yes                             |
| <b>Qualifications:</b> | CSA                             |
| <b>Miscellaneous:</b>  | 30 K Self-Temperature Rise Max. |

**Specifications**

|                           |   |
|---------------------------|---|
| <b>Voltage AC:</b>        | 250 VAC   |
| <b>Ripple Current:</b>    | 5 A (AC/DC)   |
| <b>Temperature Range:</b> | -25/+55°C   |
| <b>Voltage:</b>           | 250 VDC, 1500 VAC<br>Withstanding Voltage 1 Min. Line to Ground |
| <b>Leakage Current:</b>   | 1 mA MAX (250 V 60 Hz)  |
| <b>Resistance:</b>        | 300 MOhms MIN Insulation 500 VDC 1 Min. Line To Ground          |