


SCHMATIC



Specifications:

- Contact rating: 0.35A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min.
- Dielectric strength: 500V, 50Hz for the duration of 1 minute
- Operating temperature: -10°C to +70°C
- Storage temperature: -30°C to +85°C
- Mechanical life: 10 000 cycles min.
- Soldering conditions: auto-soldering: 240°C max., 5sec. max.
- Timing: shorting
- Material: Contacts: copper alloy, silver plated over nickel
Housing: plastic

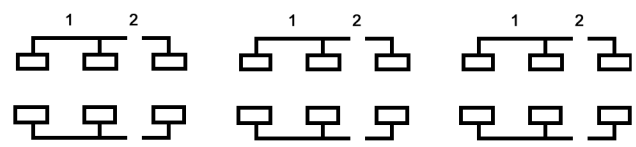

Tolerances:	Date	Name
		10/03
Modifications	Date	Name

MFP 661 N

knitter-switch

30 03 93