


Specifications:

Contact rating: 6V-, 200mA
 Contact resistance: < 50mOhm
 Insulation resistance: > 100 MOhm
 Mechanical life: 5000 cycles min.
 Contacts: phosphor bronze, gold plated
 Terminals: brass, gold plated
 Contact timing: non shorting
 Slide color: blue
 soldering conditions: auto soldering, 230°C, 3 sec

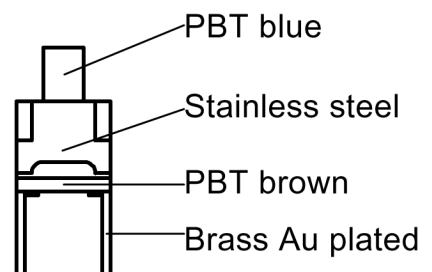

Maßstab		Datum	Name	MMP 221 B
Oberfläche	Bearb.			
	Gepr.			
	Norm			
knitter-switch				30 05 29
Zust.	Änderung	Datum	Name	Blatt
				Bl.