



P.C.B. LAND DIMENSION  
(Viewed from the switch mounting face)

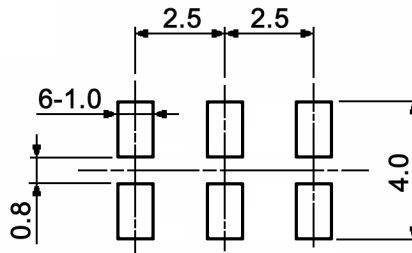

CIRCUIT DIAGRAM



C: COMMON PIN  
BOTTOM VIEW

Specifications:

- Contact rating: 0.3A, 6V DC
- Contact resistance: 70mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC for 1 minute (50/60Hz, 2mA)
- Operating temperature: -40°C to +105°C
- Soldering heat resistance: 260 +/-5°C, 5 +/-1sec.
- Mechanical life: 5 000 cycles
- Operating force: 200gf +/-100gf
- Material: Terminal: brass, gold plated 0.25µm  
Cover: SUS, washing  
Slider: PA46, blue, UL94HB  
Contact plate: C5210, gold plated 0.25µm  
Case: PA46, black, UL94V0



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm		Date	Name	<h1>MMS 221 B</h1>
		03/02	us	
Operating temperature	01/10	dr		<h2>30 03 03</h2>
Material	04/08	dr		
Specifications	10/06	dr	<b>knitter-switch</b>	
General tolerances	10/06	dr		
Modifications	Date	Name		
				Page 1/1