


x	Height	Packaging unit	y	Operating force	Color of stem	Electrical life
1	4.3mm	1 800 pcs./reel	N	160 +/-50gf	brown	50 000 cycles
2	5.0mm	1 600 pcs./reel	R	260 +/-50gf	red	30 000 cycles
			S	320 +/-80gf	salmon	50 000 cycles
			Y	520 +/-130gf	yellow	30 000 cycles

Specifications:


Contact rating: 50mA, 12V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 500V DC
 Dielectric strength: 250V, 50Hz for the duration of 1 minute
 Operating temperature: -25°C to +70°C
 Travel: 0.25mm +0.2/-0.1mm
 Mounting: on pc-board - SMD
 Material: Contacts: stainless steel, silver plated
 Terminals: brass, silver plated
 Cover: stainless steel
 Base / stem: high-temp. nylon meets UL94V-0 or PPA

Soldering conditions:

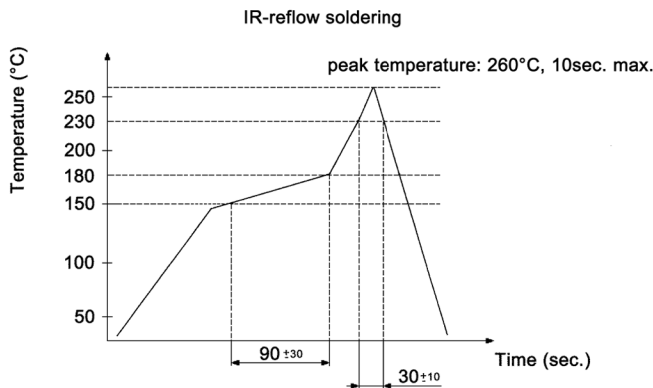

Tolerances:			Date	Name	TSS 3x y
			08/07	RMG	
Table "y"	09/11	dr	knitter-switch		30 06 17
Specifications	08/09	dr			
Modifications	Date	Name			1/2

Packaging:

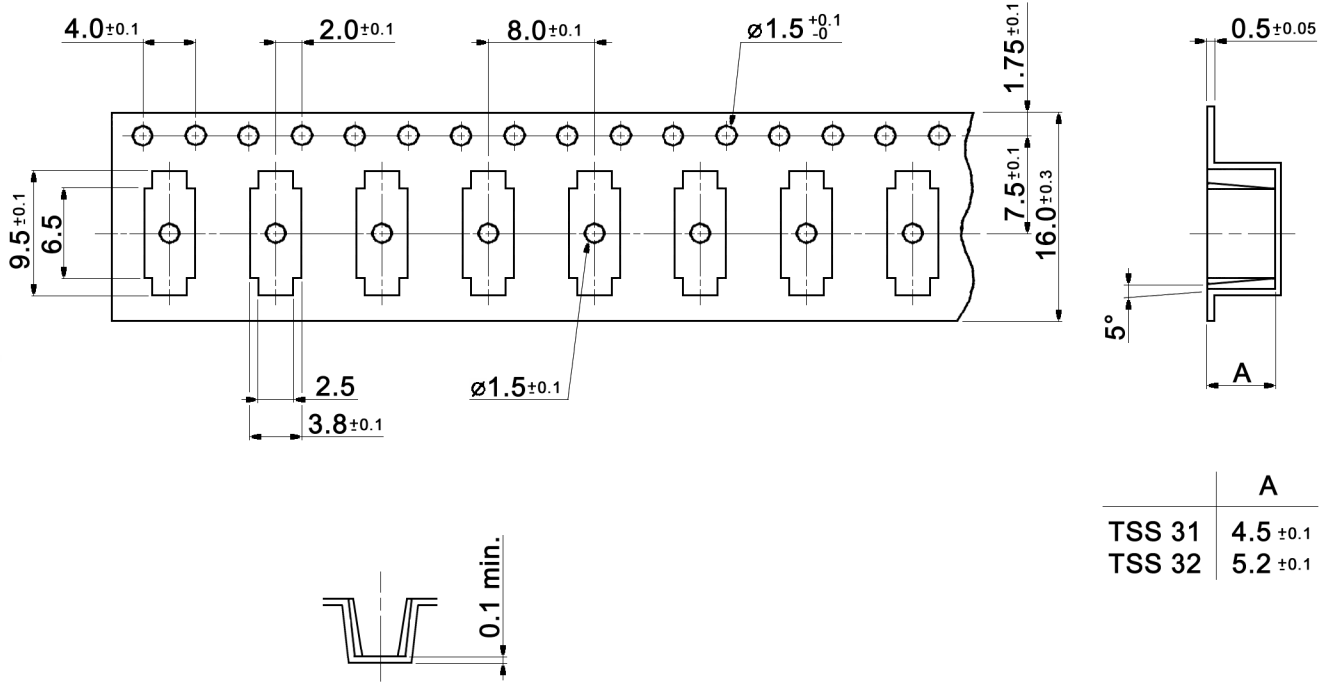

Tolerances: ±0.1mm			Date	Name	TSS 3x y
			08/07	RMG	
			knitter-switch		30 06 17
Modifications			Date	Name	Page 2/2