

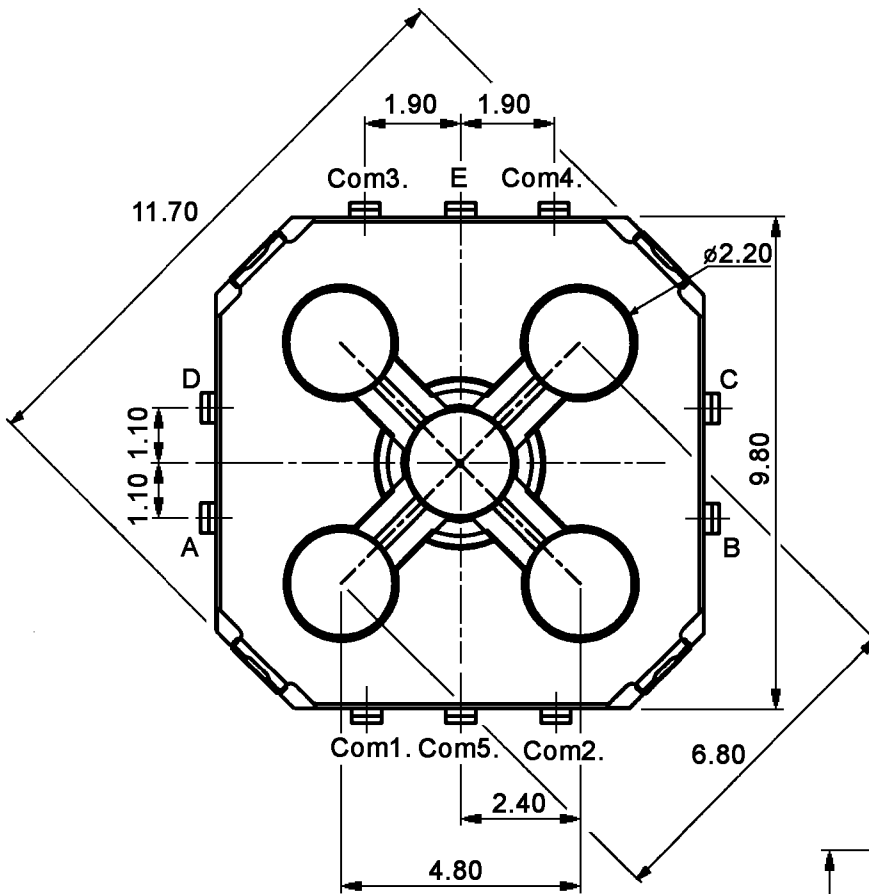


CIRCUIT DIAGRAM

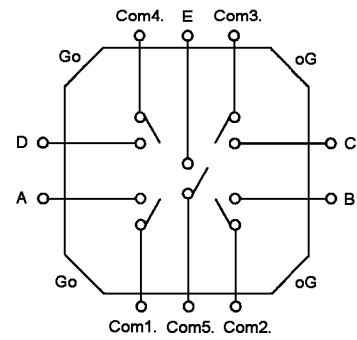

P.C.B. LAYOUT

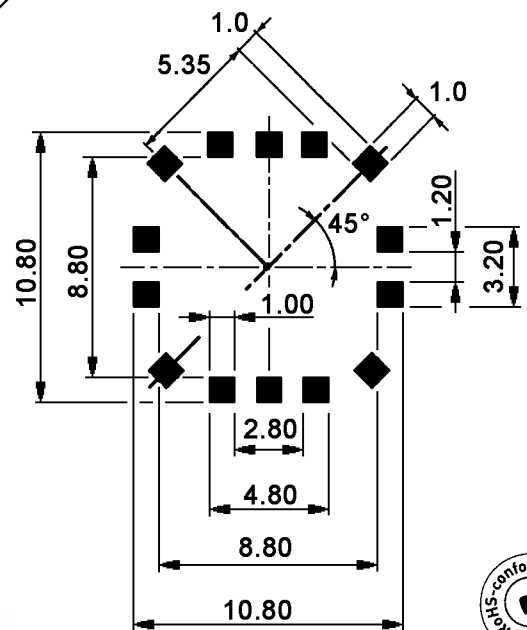

Tolerances: max. ±0.20mm	Date	Name
	09/04	dr
Soldering conditions	11/13	dr
RoHS compliant	10/10	dr
Specifications	01/05	dr
Modifications	Date	Name

TSSJ 55

knitter-switch


30 04 92

Page

1/2

Specifications:

Contact rating: 50mA; 12V DC
Contact resistance: 100mOhm max.
Insulation resistance: 100MOhm min.
Dielectric strength: 250V AC (50-60Hz) for 1 minute
Operating temperature: -20°C to +70°C
Storage temperature: -40°C to +85°C
Mechanical life: 200 000 cycles min.
Operating force: Center: 360 +/-70g; four directions: 180 +/-60g
Materials: Stem: high-temp, thermoplastic, nylon UL 94V-0; black
 Cover: nickel silver
 Contact: stainless steel; with silver cladding
 Base: high-temp, thermoplastic, nylon UL 94V-0; black
 Terminal: brass, with silver cladding
 Solder heat resistance: 250°C, 10sec.; max. 255°C
Travel: 0,25^{+0,15}_{-0,1} mm
Soldering conditions:

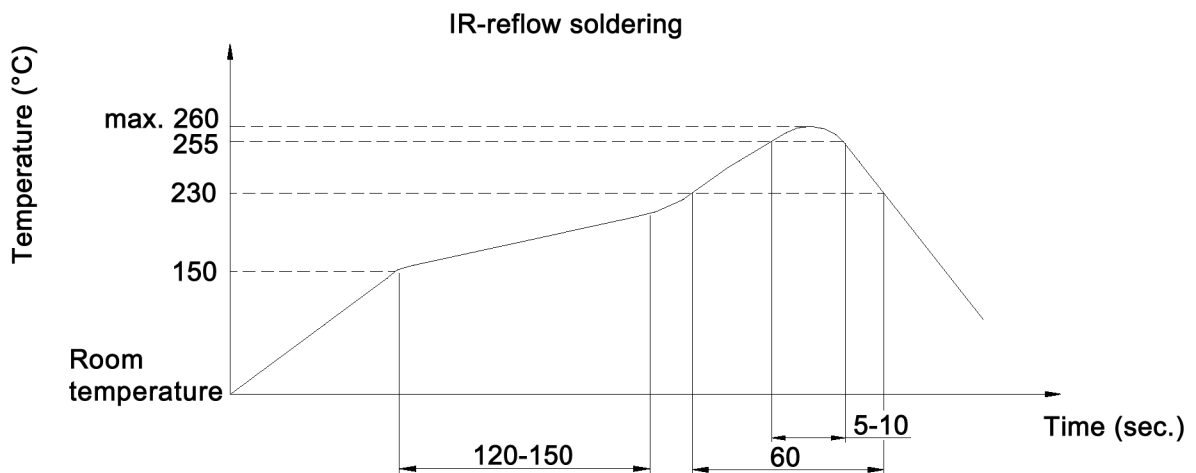

Tolerances: max. ±0.20mm	Date	Name	<h1>TSSJ 55</h1>
	09/04	dr	
			<h2>30 04 92</h2>
			Page
			2/2
Modifications	Date	Name	

knitter-switch

Page

2/2