

LNA-40-00101200-22-15P

LOW NOISE AMPLIFIER



FEATURES

- Unconditionally stable
- 50 Ohm input and output match
- Internally regulated
- Hermetically sealed package available
- Available as RoHS compliant

TYPICAL APPLICATIONS

- Wireless Infrastructure
- RF Microwave and VSAT
- Military and Aerospace
- Test Instruments
- Fiber Optics

ELECTRICAL SPECIFICATIONS (23°C)

| Parameter | Min | Max | Typ | Units |
|---------------------|-----|------|-----|-------|
| Frequency Range | 0.1 | 12 | - | GHz |
| Noise Figure | - | 2.2* | - | dB |
| Gain | 40 | - | - | dB |
| Gain Flatness (+/-) | - | 2 | - | dB |
| Output Power @ P1dB | 15 | - | - | dBm |
| Input VSWR | - | 2.3 | - | - |
| Output VSWR | - | 2.3 | - | - |
| Voltage | - | - | 15 | VDC |
| Current | - | 350 | - | mA |

* Noise Figure May Exceed Limits Below 500 MHz

Absolute Maximum Ratings

| Parameter | Rating | Units |
|--------------------------|-------------|-------|
| Operating Voltage | 20 | V |
| RF Input Power | 13 | dBm |
| Operating Temperature | -55 to +85 | °C |
| Non-Operating Temp Range | -65 to +125 | °C |

Mechanical Specifications

| Size (inches) | |
|------------------|--------|
| Length | 0.89 |
| Width | 0.64 |
| Height | 0.31 |
| Input Connector | SMA(F) |
| Output Connector | SMA(F) |

The material presented in this datasheet was current at the time of publication. L3 Narda-MITEQ's continuing product improvement program makes it necessary to reserve the right to change our mechanical and electrical specifications without notice. If either of these parameters is critical, please contact the factory to verify that the information is current.

This material consists of L3 Narda-MITEQ general capabilities information and does not contain controlled technical data as defined within the International Traffic in Arms (ITAR) Part 120.10 or Export Administration Regulations. (EAR) Part 734.7-11. D-405/05.01.18



narda  **MITEQ**

435 Moreland Road

Hauppauge, NY 11788

Tel : 631-231-1700

Fax: 631-231-1711

Email : componentsnm@L3T.com





www.nardamiteq.com

LNA-40-00101200-22-15P

LOW NOISE AMPLIFIER



*Typical data shown below

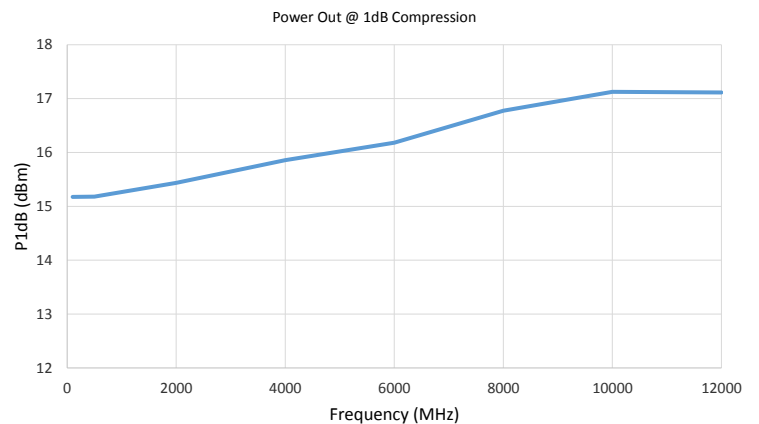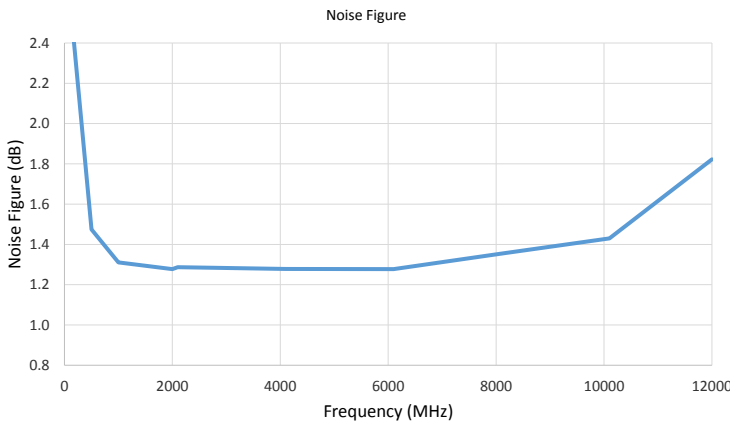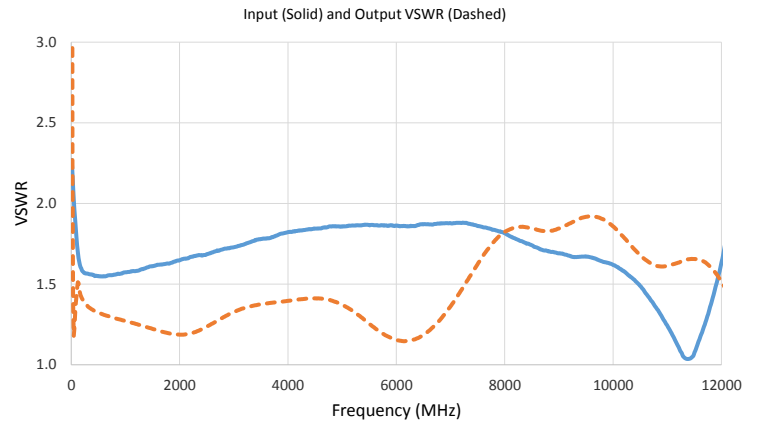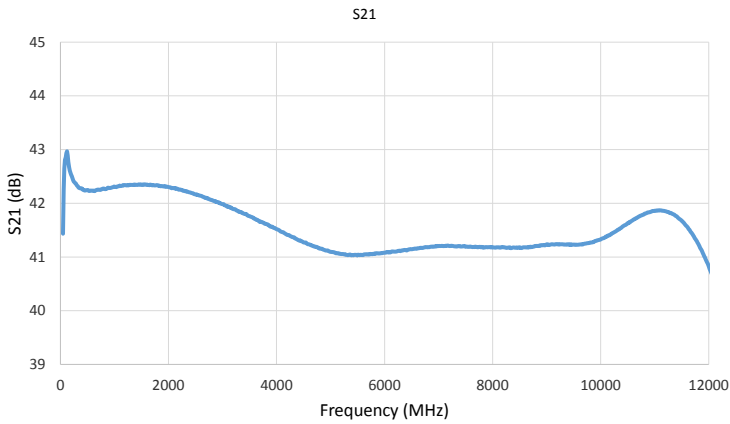

| Environmental Specifications | | |
|--|-------------------------------------|------------------------|
| Parameter | Standard | Description |
| Operational temperature | | -55 C to +85 C |
| Storage temperature | | -65 C to +125 C |
| Random Vibration | MIL-STD-883K, Method 2026, Cond. IB | 50 - 2000 Hz, 7.3 Grms |
| Humidity | MIL-STD-202, Method 103B, Cond. B | 95% RH |
| Altitude | MIL-STD-883K, Method 1001, Cond. C | 50,000 feet |
| *Amplifiers are designed to meet the above conditions. If ESS testing is required please contact factory.* | | |



435 Moreland Road
 Hauppauge, NY 11788
 Tel : 631-231-1700
 Fax: 631-231-1711
 Email : componentsnm@L3T.com
www.nardamiteq.com

LNA-40-00101200-22-15P

LOW NOISE AMPLIFIER

