

Wide Band Mobile Load Coil Antenna

B1360W

Innovative **Technology** for a **Connected** World



PREMIUM MOBILE LOAD COIL ANTENNAS ARE INDUSTRY STANDARD

Laird Technologies'ongoing commitment to refinement in mechanical and electrical design has resulted in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold plated push pin contacts make Laird Technologies the obvious choice for quality and long lasting value for demanding mobile radio communications.

FEATURES ROHS

- High performance wide band mobile antenna
- Special UV treated radome, resists sun damage
- Easy installation with optional NMO Mounts
- 100% tested on a network analyzer

MARKETS

- Public safety
- Transportation
- Utility
- Military mobile

SPECIFICATIONS

ELECTRICAL	
Frequency range	136-174 MHz
Center frequency	155 MHz
Gain	Unity
Pattern	Omnidirectional
Maxmium power	100 W
Nominal impedance	50 Ω
Polarization	Vertical
VSWR	≤2.0:1
Termination	1-1/8"-18 thread (NMO) mounts
Mounting options (sold separately)	3/4" or 3/8" NMO magnetic or trunk mount
Radiator	17-7ph straight stainless steel
Shock spring	302 stainless steel
Base housing material	Molded ABS
Noise suppressor (sold separately)	Blackhawk NS1535

Approximately 19.5" 49.4cm)
1.44" (36.58mm)
0.590 lbs (9.44 oz)
0.049 sq ft

global solutions: local support ™

Americas: +1.847 839.6907 IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12 IAS-EUSales@lairdtech.com Asia: +1.65.6.243.8022 IAS-AsiaSales@lairdtech.com

www.lairdtech.com







Wide Band Mobile Load Coil Antenna

B1360W

Innovative **Technology** for a **Connected** World

ANTENNA PATTERNS AND VSWR CHARTS

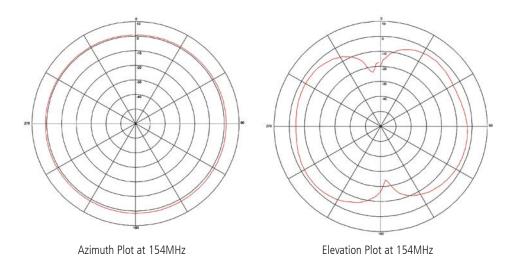

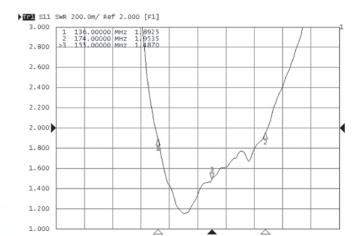

VSWR Plot at 136-174MHz

SYSTEM ORDERING INFORMATION

B1360W Chrome B-Coil Wide Band Antenna BB1360W Black B-Coil Wide Band Antenna

B1360WS Chrome B-Coil Wide Band Antenna w/Spring
BB1360WS Black B-Coil Wide Band Antenna w/Spring

ANT-DS-B1360W 0310

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be laidle for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies. Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies, on any third party intellectual property of third parties. Nothing herein provides a literase under any Laird Technologies or any third party intellectual property influs.

