

MOUNTING BRACKETS



ANTENEX® uses conductive black chrome on its stainless steel mounting brackets. Our competition uses cheaper nonconductive black paint. You will find that a more reliable ground can be achieved with **ANTENEX®** mounting brackets.

Our aluminum mirror mount brackets are extruded and not stamped. This results in a stronger more durable bracket without the risk of bend fatigue and cracking that may occur with the stamped aluminum products. **ANTENEX®** aluminum mirror mounts are bright or black anodized for corrosion protection. The **SBT1000** bracket was specifically designed for 1" hole applications such as the **Phantom™** Permanent mount and the **Invader™** threaded mount.

Model **Description**

STAINLESS TRUNK GROOVE MODELS

LBT3400	"L" Bracket for Trunk Groove, 3/4" Hole
LBTB3400	Black "L" Bracket for Trunk Groove, 3/4" Hole
LBT3800	"L" Bracket for Trunk Groove, 3/8" Hole
LBTB3800	Black "L" Bracket for Trunk Groove, 3/8" Hole

STAINLESS STRAIGHT TRUNK GROOVE MODELS

SBT1000	Straight Bracket - 1" Hole
SBT3400	Straight Bracket - 3/4" Hole
SBTB3400	Black Straight Bracket - 3/4" Hole

Note: The above straight bracket may be flexed to fit late model Dodge Ram™ trucks and other hard to fit vehicles.

BRIGHT MIRROR MOUNT MODELS

LBM9034	"L" Bracket for Mirror Mount at 90°, 3/4" Hole
LBMB9034	Black "L" Bracket for Mirror Mount, 3/4" Hole
LBM9038	"L" Bracket for Mirror Mount at 90°, 3/8" Hole
LBMB9038	Black "L" Bracket for Mirror Mount, 3/8" Hole
LBM4534	Rt Angle "L" for Mirror Mount at 45°, 3/4" Hole
LBMB4534	Black Rt Angle "L" for Mirror at 45°, 3/4" Hole
LBM4538	Rt Angle "L" for Mirror Mount at 45°, 3/8" Hole
LBMB4538	Black Rt Angle "L" for Mirror at 45°, 3/8" Hole




SBT1000



LBM4534, LBMB4534



LBM9034, LBMB9034



LBT3400, LBTB3400




SBT3400, SBTB3400

PRECISION CABLE ASSEMBLIES™


ANTENEX® Precision Cable Assemblies™ will save you both time and money. Let us do the work. We are highly equipped to put together just about any combination you may require in a very fast turn around time. We ship most orders the same day!



A small sampling of our capabilities are shown here.

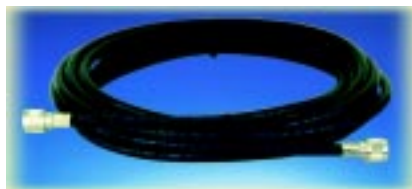

Installation Jumpers



Long Runs



Short Lengths, Various Cables and Connectors

Ordering Guide - Clear, Easy & Sensible!

PT8X25NN = Precision Cable Assembly™, RG8X Cable, 25 ft. Length, N Crimp Both Ends.

PT	Cable Product	PT = Pigtail Cable Assembly	
8X	Cable Style	8 = RG58A/U	400 = LMR400
		8U = RG58U	600 = LMR600
		8X = RG8X "low loss"	900 = LMR900
		D = Teflex™	1200 = LMR1200
		F = Antenex Teflon® Coax Cable	9913 = R9913
25	Cable Length	Length in feet	
N	Connector Style	If blank = no connector	PE = PL259 Extended nut crimp
		B = BNC crimp	PF = Female PL259 crimp
		M = Mini UHF crimp	PS = PL259 solder
		N = N crimp	PST = PL259 solder Teflon®
		NS = N Solder	PT = PL259 crimp silver Teflon®
N	Connector Style	P = PL259 crimp	T = TNC crimp

Model **Description**

PRECISION CABLE ASSEMBLIES™

PT2135NNF	Pigtail, 213 coax 5 ft. w/ N male & N female crimp-on connectors installed.
PT2135NN	Pigtail, 213 coax 5 ft. w/ N male connectors crimp-on installed on each end.
PT40050NPS	Pigtail, LMR400 coax 50 ft. long with N male connector & PL259 male connector installed.
PT400100NPT	Pigtail, LMR400 coax 100 ft. long with N male & Teflon® PL259 crimp-on connectors installed.
PT8X25NN	Pigtail, 8X Low Loss 25 ft. long with N male crimp-on connectors installed on both ends.
PT8X50NP	Pigtail, 8X Low Loss 50 ft. long with N male & PL259 crimp-on connectors installed.
PTD5NN	Pigtail, Teflex™ cable 5 ft. long with N male crimp-on connectors installed on both ends.
PTD20PP	Pigtail, Teflex™ cable 20 ft. long with crimp-on PL259 connectors installed on both ends.
PT5850NP	Pigtail, RG58A/U coax 50 ft. long with N male & PL259 crimp-on connectors installed.
PT5825PPF	Pigtail, RG58 coax 25 ft. long with male PL259 & female PL259 connector installed.