

EVA-S

~13° spot beam

TECHNICAL SPECIFICATIONS:

Dimensions

Ø 35.0 mm 16.4 mm

yes 🛈

Fastening

Height

ROHS compliant

MATERIAL SPECIFICATIONS:

Component

EVA-S

Type Single lens



PRODUCT DATASHEET

C12041_EVA-S

Material PMMA Colour clear Finish


ORDERING INFORMATION:

Component C12041_EVA-S » Box size: 480 x 280 x 300 mm

Qty in box	MOQ	MPQ	Box weight (kg)
540	90	45	5.4





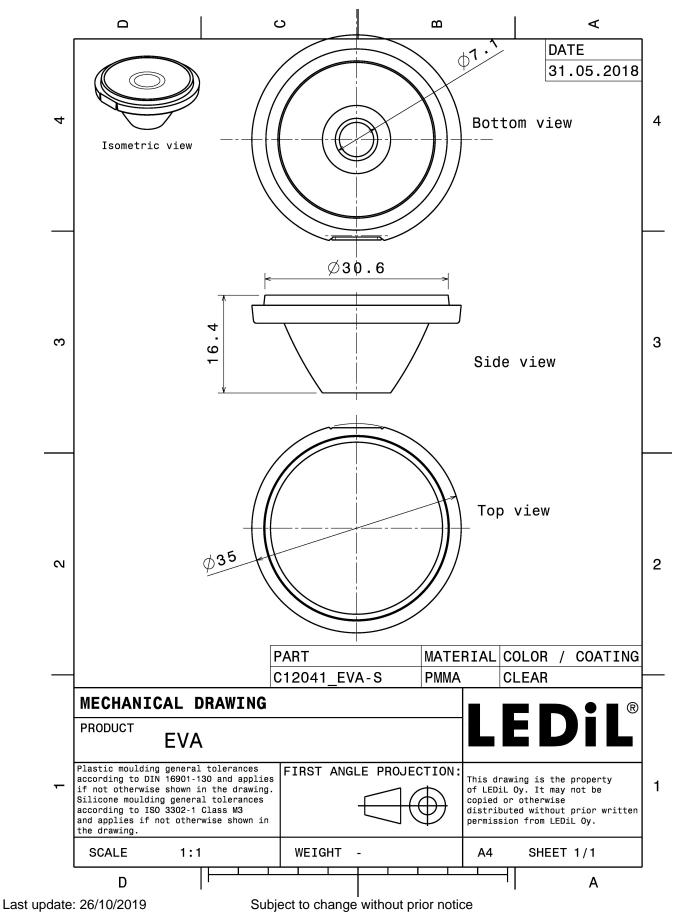

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.





PHOTOMETRIC DATA (MEASURED):

CITIZEN

LED	CLU7A2 (LES 4.2mm)	
FWHM	13.0°	
Efficiency	93 %	
Peak intensity	11.9 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		




CREE ≑

LED	XM-L		
FWHM	13.0°		
Efficiency	94 %		
LEDs/each optic	1		
Light colour	White		
Required components:			

ΜΝΙCΗΙΛ

LEDNSMx286MFWHM17.0°Efficiency93 %Peak intensity6.4 cd/lmLEDs/each optic1Light colourWhiteRequired components:










PHOTOMETRIC DATA (SIMULATED):

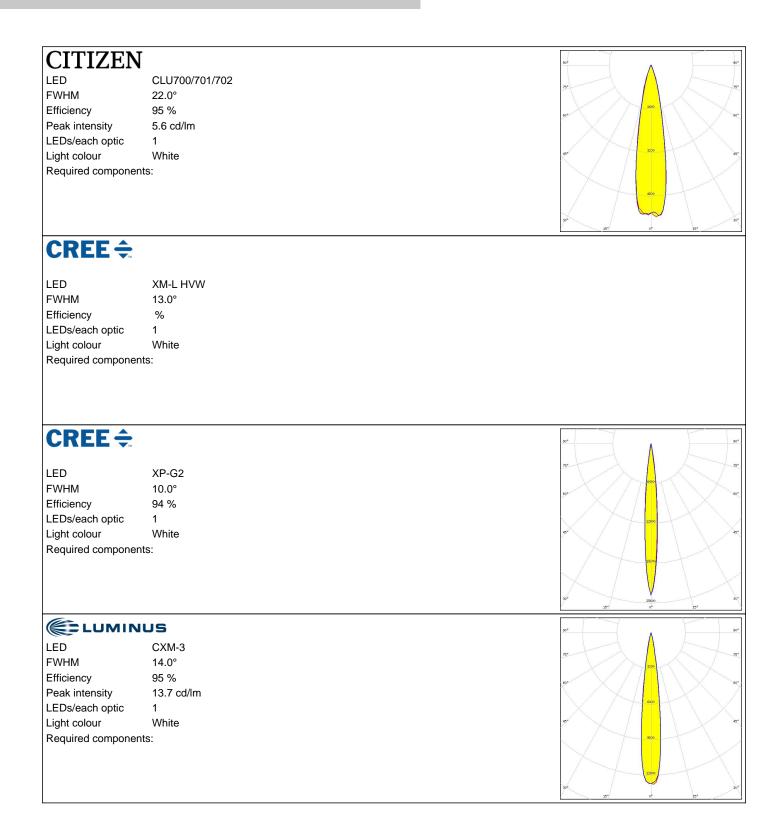





PHOTOMETRIC DATA (SIMULATED):

En		
	US	90* 90*
LED	CXM-4	75'
FWHM	18.0°	
Efficiency	94 %	60°
Peak intensity	8.2 cd/lm	3200
LEDs/each optic	1	
Light colour	White	¢r'
Required componen	ts:	
		5432
		34° 35° 0° 35°
OSDAM		
OSRAM Opto Semiconductors		50* 50*
	OSCONIQ P 7070	90°
opto Semiconductors LED FWHM	19.0°	
opto Semiconductors LED FWHM Efficiency	19.0° 93 %	7.
opto Semiconductors LED FWHM Efficiency Peak intensity	19.0°	97. 60. 60.
^{opto semiconductors} LED FWHM Efficiency Peak intensity LEDs/each optic	19.0° 93 % 6.8 cd/lm 1	72° 60° 2000
opto semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour	19.0° 93 % 6.8 cd/lm 1 White	97. 60. 60.
^{opto semiconductors} LED FWHM Efficiency Peak intensity LEDs/each optic	19.0° 93 % 6.8 cd/lm 1 White	72° 60° 2000
opto semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour	19.0° 93 % 6.8 cd/lm 1 White	a. 8. 200 200 200 200 200 200 200 200 200 20
opto semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour	19.0° 93 % 6.8 cd/lm 1 White	a. 8. 200 200 200 200 200 200 200 200 200 20
opto Semiconductors LED FWHM Efficiency Peak intensity LEDs/each optic Light colour	19.0° 93 % 6.8 cd/lm 1 White	a. 8. 200 200 200 200 200 200 200 200 200 20



PRODUCT DATASHEET C12041_EVA-S

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support www.ledil.com/ where_to_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/

where_to_buy