

**HYPER-FAST
GLASS PASSIVATED RECTIFIER**


**REVERSE VOLTAGE – 600Volts
FORWARD CURRENT – 8.0 Ampere**

FEATURES

- Soft, Hyper fast switching capability
- Specially suited for critical mode Power Factor Corrections.
- High reliability and efficiency

MECHANICAL DATA

- Case: ITO-220AC
- Case Material: Plastic material, UL flammability classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Lead Free Plating
- Polarity indicator: As marked on the body
- Weight: 0.06 ounces, 1.70 grams
- Component in accordance to RoHs 2002/95/EC
- ESD capability : HBM_8KV (JESD22-A114)
- Maximum mounting torque = 0.5 N.m (5.1 Kgf.cm)

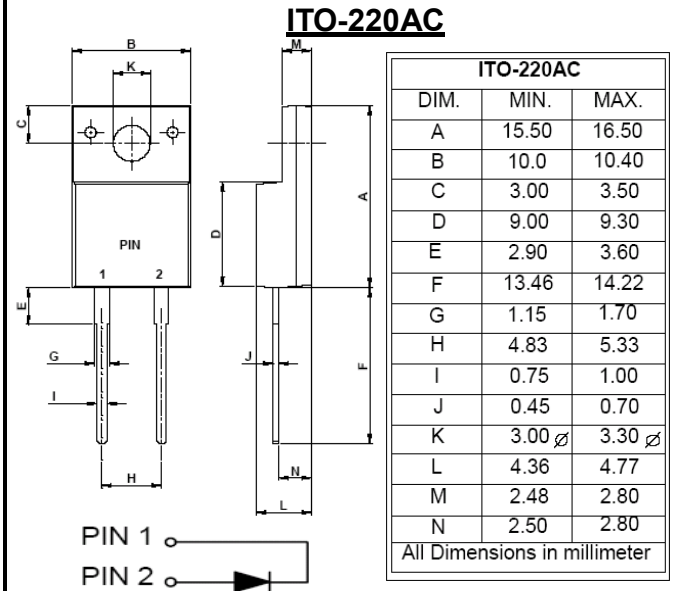

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	LTTH806LF	UNIT			
Device marking code	Note	LTTH806LF	---			
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600	V			
Average Rectified Output Current @ $\delta = 0.5$ See FIG.1	I_F	8.0	A			
Peak Forward Surge Current 8.3ms single half sine-wave	I_{FSM}	120	A			
$I^2 t$ Rating for fusing ($3ms \leq t \leq 8.3ms$)	$I^2 t$	60	A^2S			
Storage temperature range	T_{STG}	-55 to +150	°C			
Operating junction temperature range	T_J	-55 to +150	°C			
PARAMETER	TEST CONDITIONS	SYMBOL	Min.	Typ.	Max.	UNIT
Breakdown voltage	$I_R = 8.0\mu A$ $T_J = 25^\circ C$	V_B	600	---	---	V
Forward Voltage (1)	$I_F = 8.0A$ $T_J = 25^\circ C$ $T_J = 150^\circ C$	V_F	---	1.10 0.92	1.30 1.05	V
Leakage Current	$V_R = 600V$ $T_J = 25^\circ C$ $T_J = 150^\circ C$	I_R	---	0.05 40	8.0 200	μA
Reverse recovery time	$I_F = 0.5A$ $I_{rr} = 0.25A$ $I_R = 1.0A$ $T_J = 25^\circ C$	t_{rr}	---	50	70	ns
THERMAL CHARACTERISTIC	SYMBOL	Typical			UNIT	
Typical thermal resistance_Junction to Case	$R_{\theta JC}$	3.5			°C/W	
Typical thermal resistance_Junction to Lead	$R_{\theta JL}$	4.5			°C/W	

Note :

- (1) 300us Pulse Width, 2% Duty Cycle.
- (2) Thermal Resistance test performed in accordance with JESD-51. R_{thj-L} is measured at the PIN 2, R_{thj-C} is measured at the top centre of body.

REV. 6, Dec-2012, KTGC30

FIG.1- FORWARD CURRENT DERATING CURVE

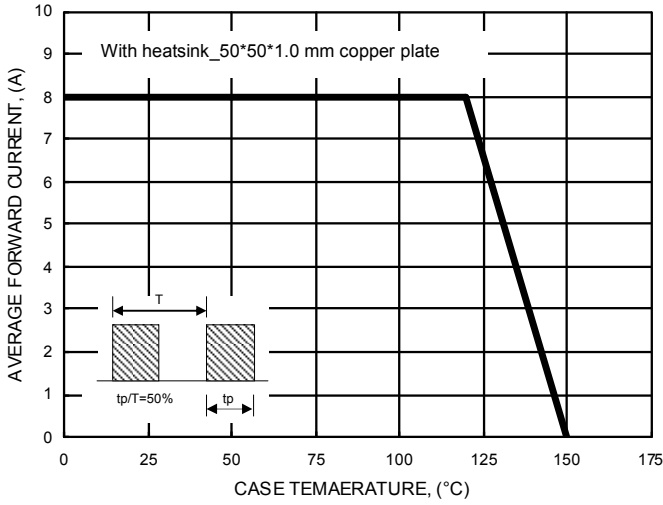


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

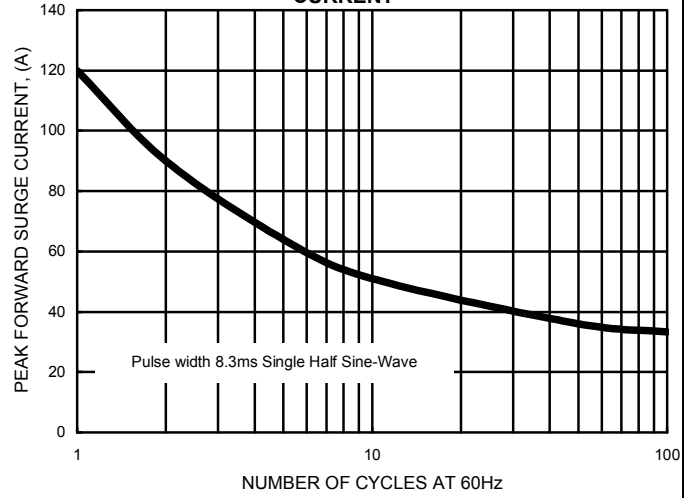


FIG.3- TYPICAL FORWARD CHARACTERISTICS

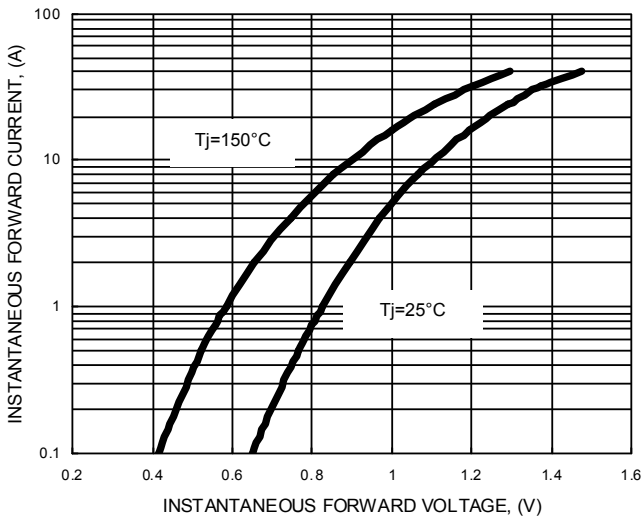


FIG.4- TYPICAL JUNCTION CAPACITANCE

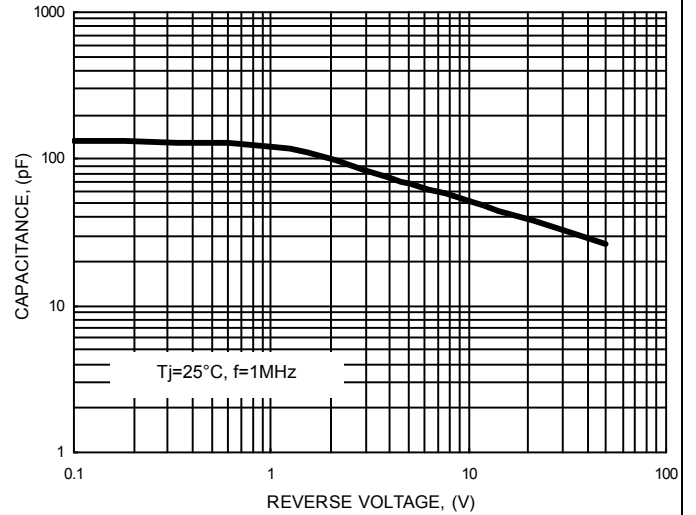


FIG.5- TYPICAL REVERSE CHARACTERISTICS


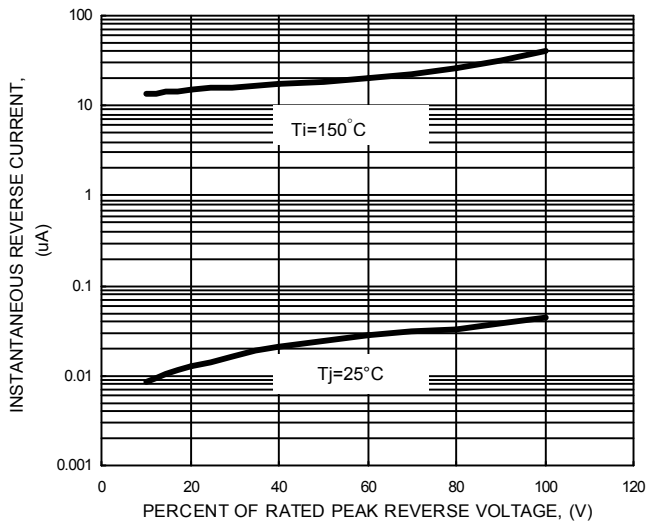


FIG.6- Conduction losses vs. average current

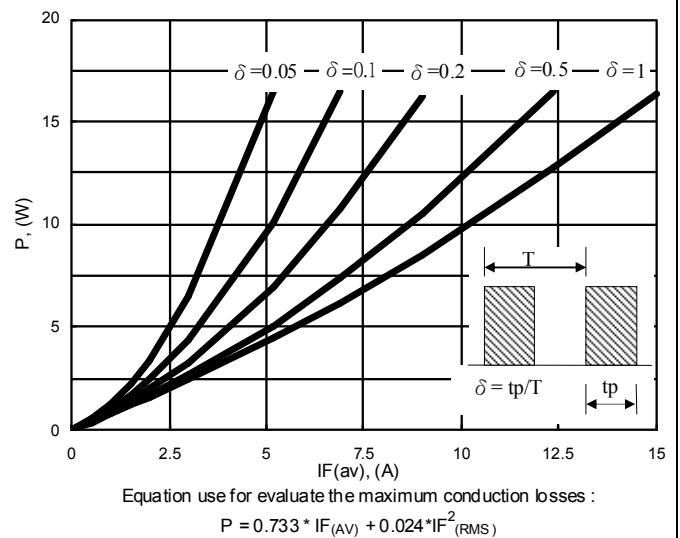

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.